

Drawing Number: PG-069-2-□□□□□□

1. Housing Material: Polycarbonate, UL Flammability Rating:

①=UL 94V-0, RoHS Compliant.

②=UL 94V-2, RoHS Compliant.

2. Contacts Type: ①=Straight pin fits Stranded wire only.

②=Two prong angled pin fits Solid/Stranded Wires.

③=Three prong pin fits Solid/Stranded Wires.

3. Gold Plating: ①=Fu (Flash), ②=2-3u" (0.0508 μm ≤ A ≤ 0.0762 μm), ③=3u" (≥ 0.0762 μm), ④=6u" (≥ 0.1524 μm), ⑤=15u" (≥ 0.381 μm), ⑥=30u" (≥ 0.762 μm), ⑦=50u" (≥ 1.27 μm).

4. Packaging Quantity: ①=1000pcs, ②=500pcs, ③=250pcs, ④=200pcs


⑤= 100pcs, ⑥= 50pcs, ⑦= 25pcs, ⑧= 10pcs

5. Housing Color: Transparent, other colors are available.


(Red=RD, Orange=OR, Yellow=YL, Green=GN, Blue=BL, Purple=PU, Black=BK)

6. Shielded Material : Brass with nickel plated, or Non-Shielded.

7. Operating Temperature: -10°C to 60°C.

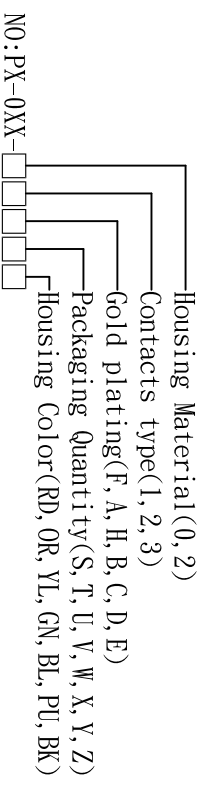

NO: PX-0XX-□□□□□□□□

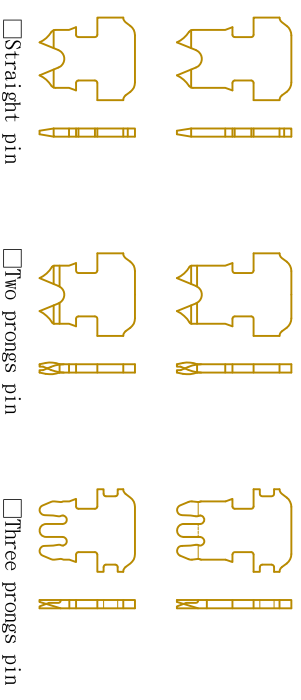

NOTE: TOL: ±0.1

B	2017.07.26. Rescheduling coding	3RD		Drawing	<i>Chidy</i>	Date	2014/10/22
A	An initial version	Unit	m/m	Checked	<i>Chuis</i>	Date	2014/10/22
Rev	Description	Scale	1:1	Approved	<i>Jason</i>	Date	2014/10/22

UL Code	8P8CS
Description	F Shielded 2 Layers with conductor hole 1.4mm and Cable clip



**Plug Master**  
INDUSTRIAL CO., LTD  
www.plugmaster.com.tw