






SCALE 1/1

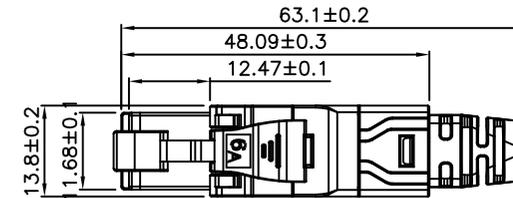

Drawing Number:P8-078
Specification :


Material :

1. Extractor : PC, UL 94V-2,Black color.
2. Housing : Zinc die-Casting with nickel plated.
3. RJ45 plug :
 - 3-1. Housing : PC, UL 94V-2, Transparent yellow color.
 - 3-2. Contact material : Phosphor bronze with 100 micro-inch nickel plated.
 - 3-3. Contact finish : Min. 50 micro-inch gold plated on surface contact area.
4. Cover : Zinc die-casting with nickel plated.
5. Wire management bar : PC, UL 94-V2,white color .
6. IDC :
 - 6-1. Housing : PC, UL 94-V2,white color.
 - 6-2. Terminal : Copper with tin plated.
7. Grounding contact : Zinc die-casting with nickel plated.
8. Boot :
 - 8-1. SR-A : PC, UL 94-V2, transparent color.
 - 8-2. SR-B : PC, UL 94-V2, transparent color.
9. PCB, UL 94-V0.
10. Copper foil tape.

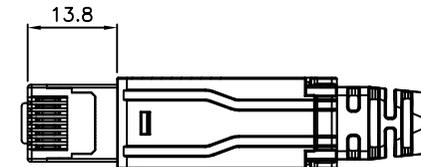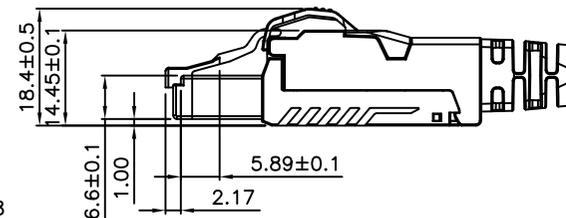

Performance :

- a. T568A & T568B wiring.
- b. Insertion force : 30N max. (IEC 60603-7-51).
- c. Retention strength : 7.7 kg between jack and plug.
- d. Operating temperature : -10°C to 60°C. (ISO/IEC 11801, ANSI/TIA 568 C.2).
- e. Life(mating cycles) :
 - e-1. 750 cycles min. (ISO/IEC 11801, IEC 60603-7-51).
 - e-2. IDC : Suitable for 23-26AWG stranded and solid wire, min. 20 installation cycles.
- f. Suitable for cable jacket OD : 5.6-8.5mm.
- g. the mated plug should complied with IEC60603-7 and TIA-1096 Chapter 4 and 5 requirement

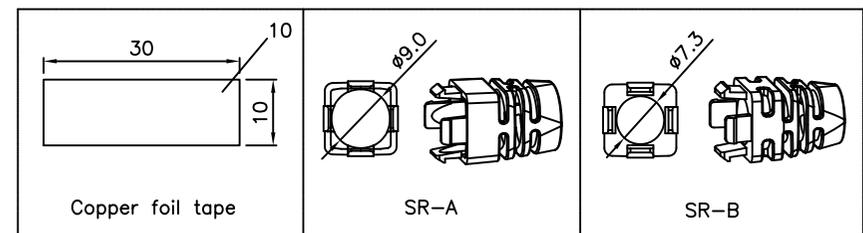

D	2021.01.21. Revised Date	3RD		Drawing	Chidy	Date	2017/11/07
A	An initial version	Unit	m/m	Checked	Chris	Date	2017/11/07
Rev	Description	Scale	1:1	Approved	Jason	Date	2017/11/07

UL Code	TL8P8C
Description	
Field Terminable Plug C6A full shielded,Snap-in boot type	



Plug Master
INDUSTRIAL CO.,LTD
www.plugmaster.com.tw