


Drawing Number:UK-001-□□□□□

- Housing Material:Polycarbonate, UL Flammability Rating:
 ①=UL 94V-0, RoHS Compliant.
 ②=UL 94V-2, RoHS Compliant.
- Contacts Type: ①=Straight pin fits Stranded wire only.
 ②=Two prong angled pin fits Solid/Stranded Wires.
 ③=Three prong pin fits Solid/Stranded Wires.
- Gold Plating: ①= Fu" (Flash), ②=2-3u" ($0.0508 \mu m \leq A \leq 0.0762 \mu m$),
 ③= 3u" ($\geq 0.0762 \mu m$), ④= 6u" ($\geq 0.1524 \mu m$),
 ⑤=15u" ($\geq 0.381 \mu m$), ⑥=30u" ($\geq 0.762 \mu m$),
 ⑦=50u" ($\geq 1.27 \mu m$).
- Packaging Quantity: ①=1000pcs, ②=500pcs, ③=250pcs, ④=200pcs
 ⑤= 100pcs, ⑥= 50pcs, ⑦= 25pcs, ⑧= 10pcs
 ⑨= Other
- Housing Color:Transparent , other colors are available.
 (Red=RD, Orange=OR, Yellow=YL, Green=GN, Blue=BL, Purple=PU, Black=BK)
- Shielded Material : Brass with nickel plated, or Non-Shielded.
- Operating Temperature:-10°C to 60°C.

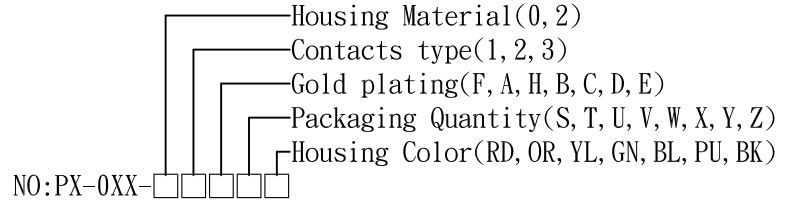

NOTE TOL:±0.1

B	2018.04.10. Rescheduling coding	3RD		Drawing	Chidy	Date	2004/11/11
A	An initial version	Unit	m/m	Checked	Chris	Date	2004/11/11
Rev	Description	Scale	1:1	Approved	Jason	Date	2004/11/11

UL Code	UK6P6C
Description	
F	

