



# High Current/High Density Board-In Connector System

## 32001H-N Series Crimp Terminal Housing

- Material: 94V-0 nylon 66
- 2 ~ 15 circuits available
- Accepts 32001T terminal

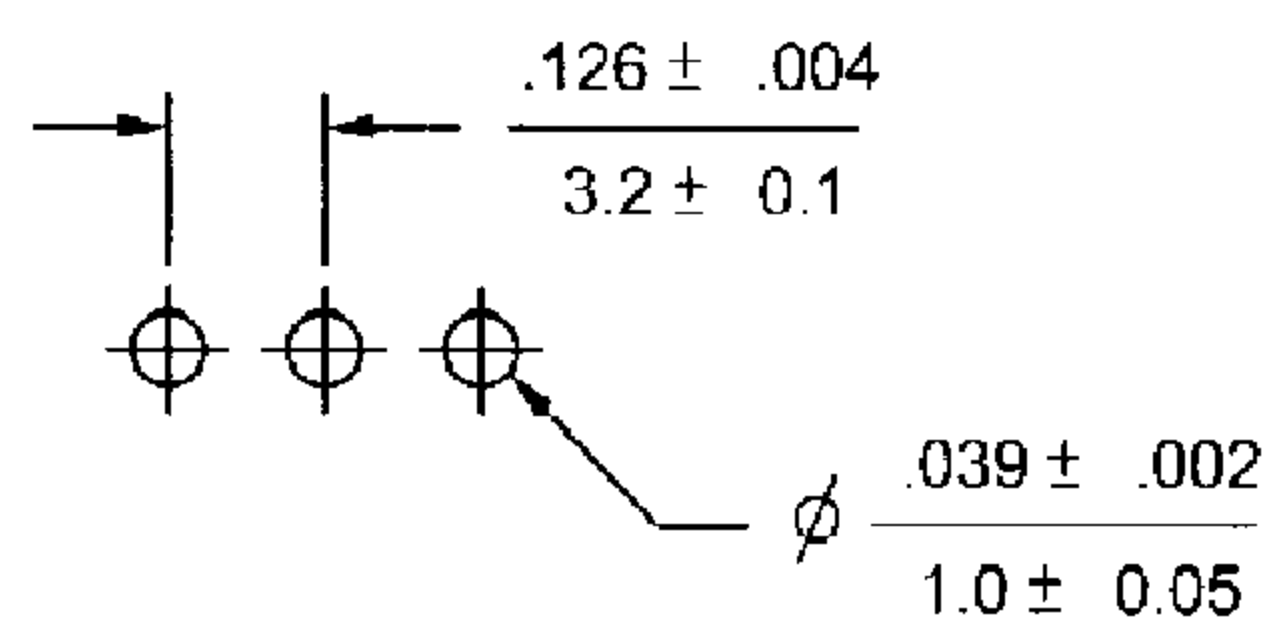

P.C.B. hole dimensions

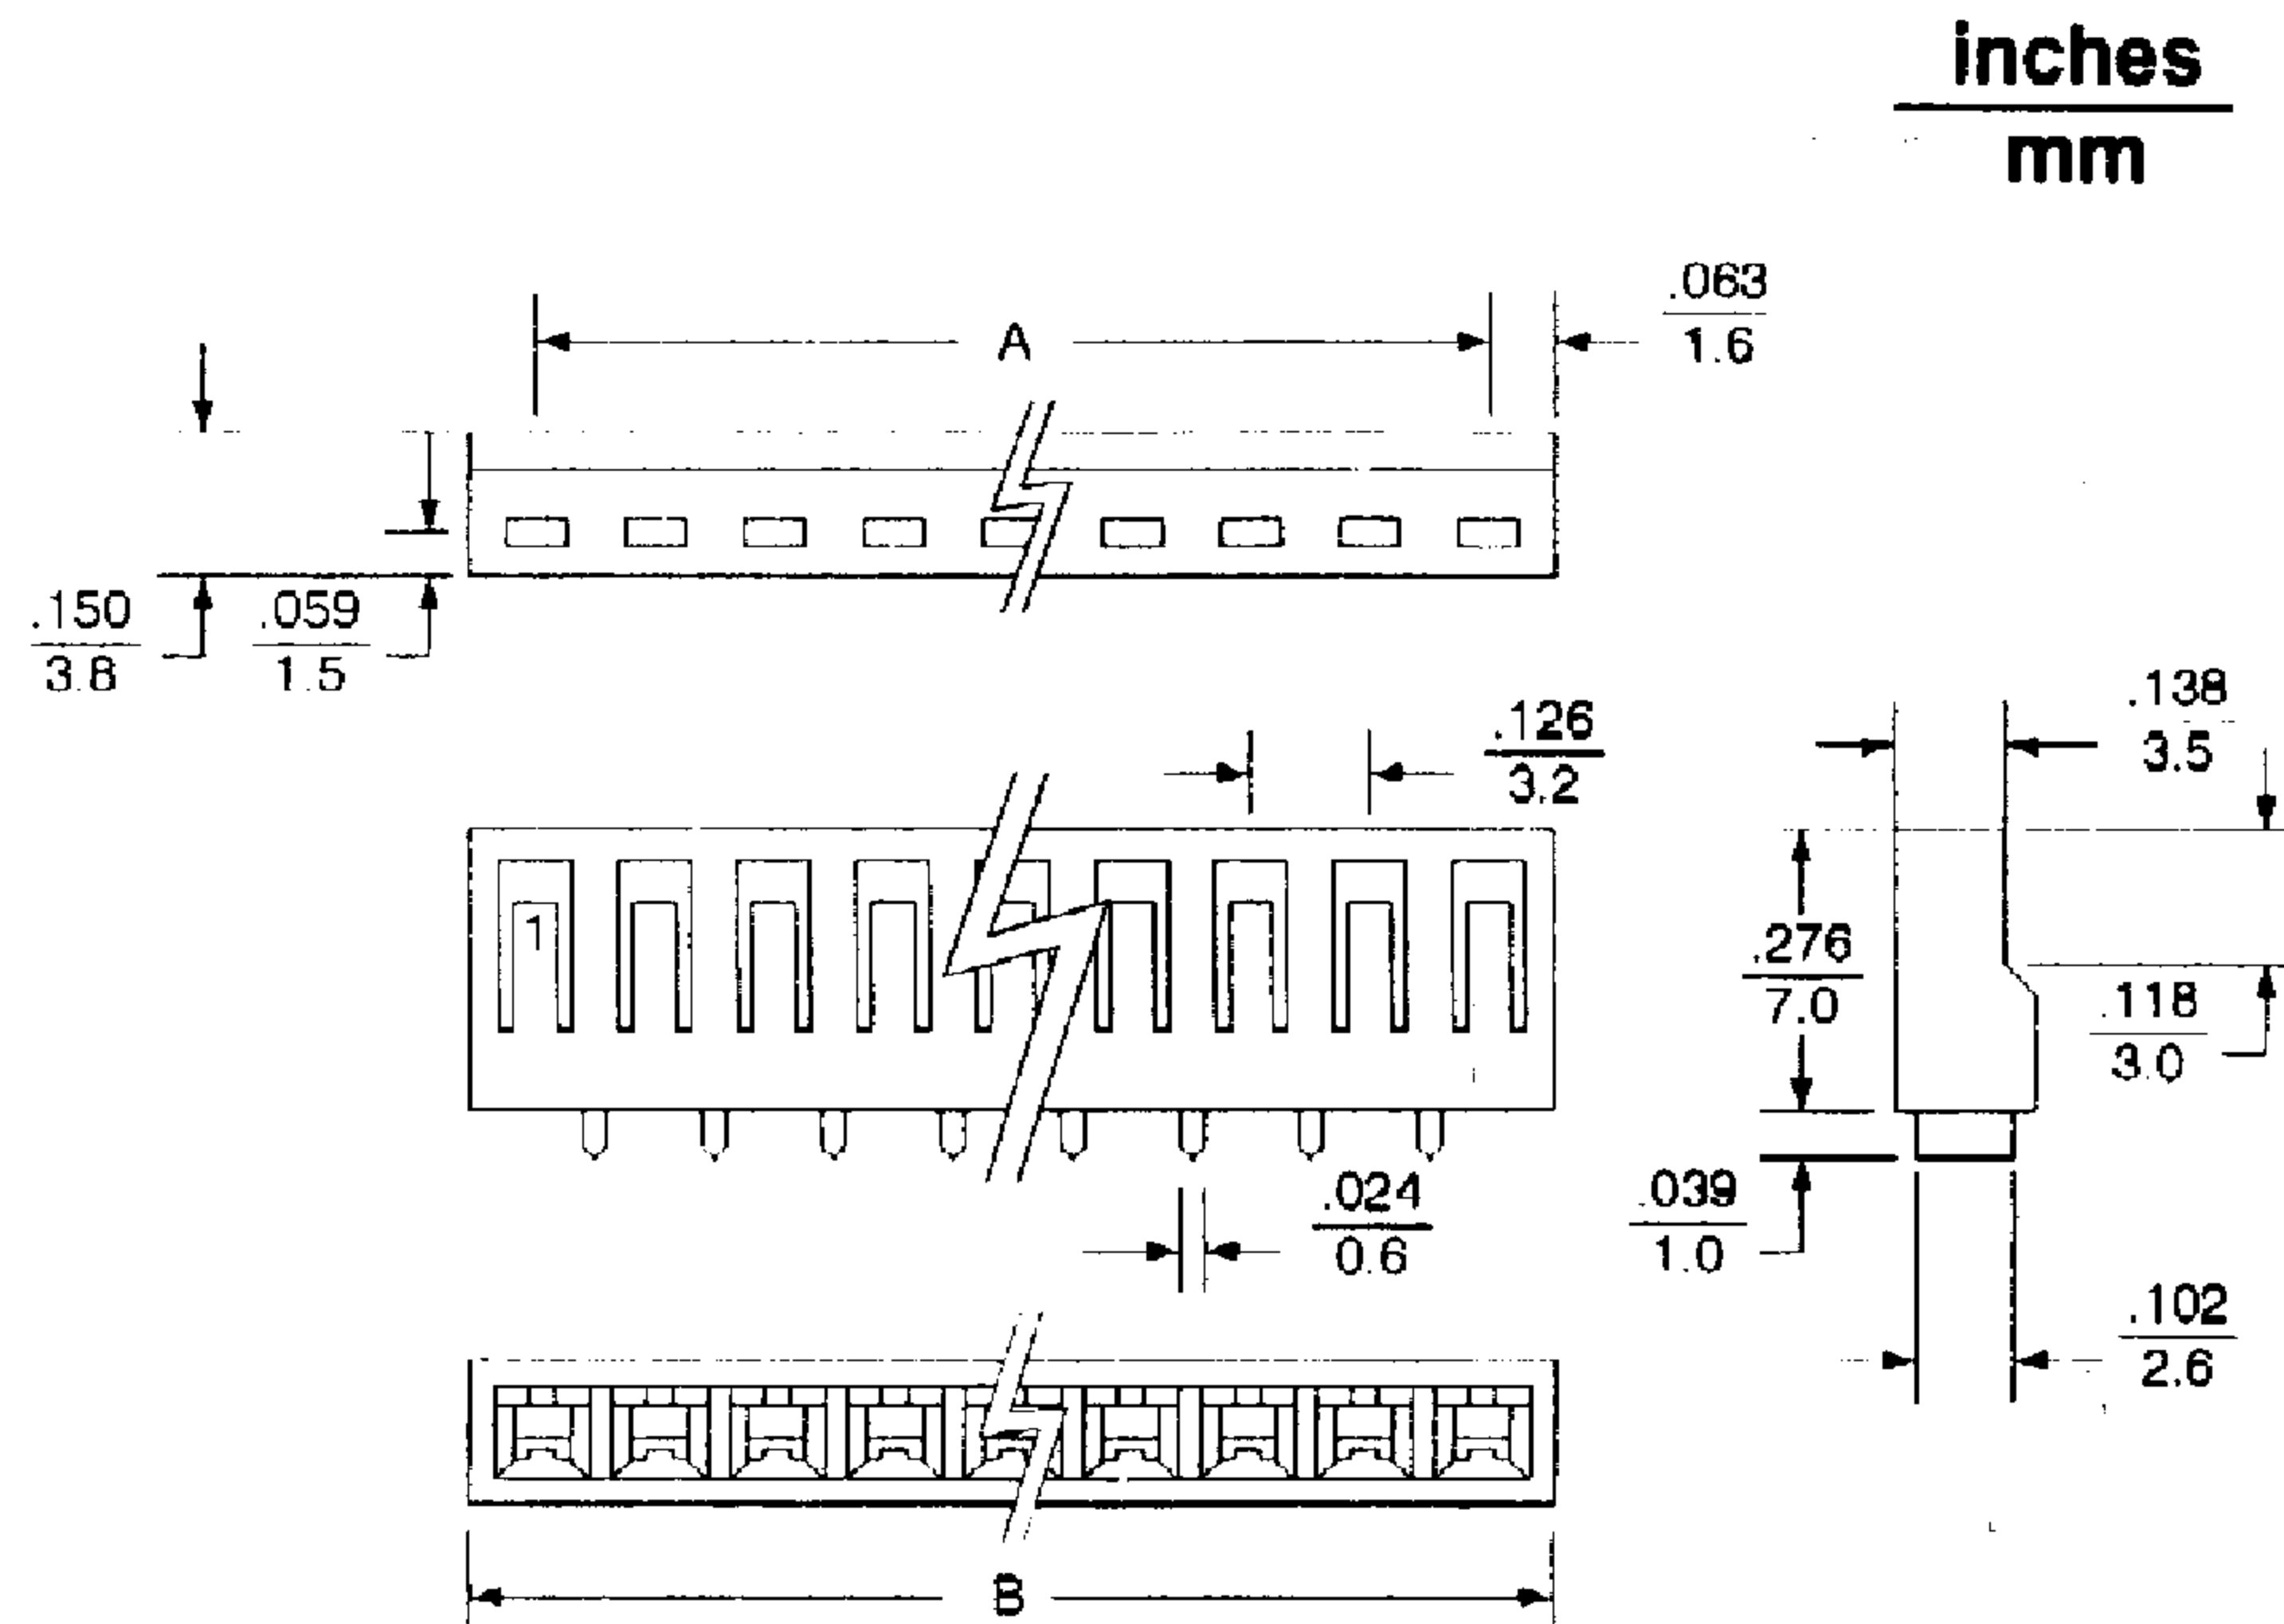


### Dimensional Information - in. (mm)


Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	.126 ( 3.2)	.252 ( 6.4)	7	.756 (19.2)	.882 (22.4)	12	1.386 (35.2)	1.512 (38.4)
3	.252 ( 6.4)	.378 ( 9.6)	8	.882 (22.4)	1.008 (25.6)	13	1.512 (38.4)	1.638 (41.6)
4	.378 ( 9.6)	.504 (12.8)	9	1.008 (25.6)	1.134 (28.8)	14	1.638 (41.6)	1.764 (44.8)
5	.504 (12.8)	.630 (16.0)	10	1.134 (28.8)	1.260 (32.0)	15	1.764 (44.8)	1.890 (48.0)
6	.630 (16.0)	.756 (19.2)	11	1.260 (32.0)	1.386 (35.2)			

## 40002H-N Series Crimp Terminal Housing

- Material: 94V-0 nylon 66
- 2 ~ 15 circuits available
- Accepts 32001T terminal

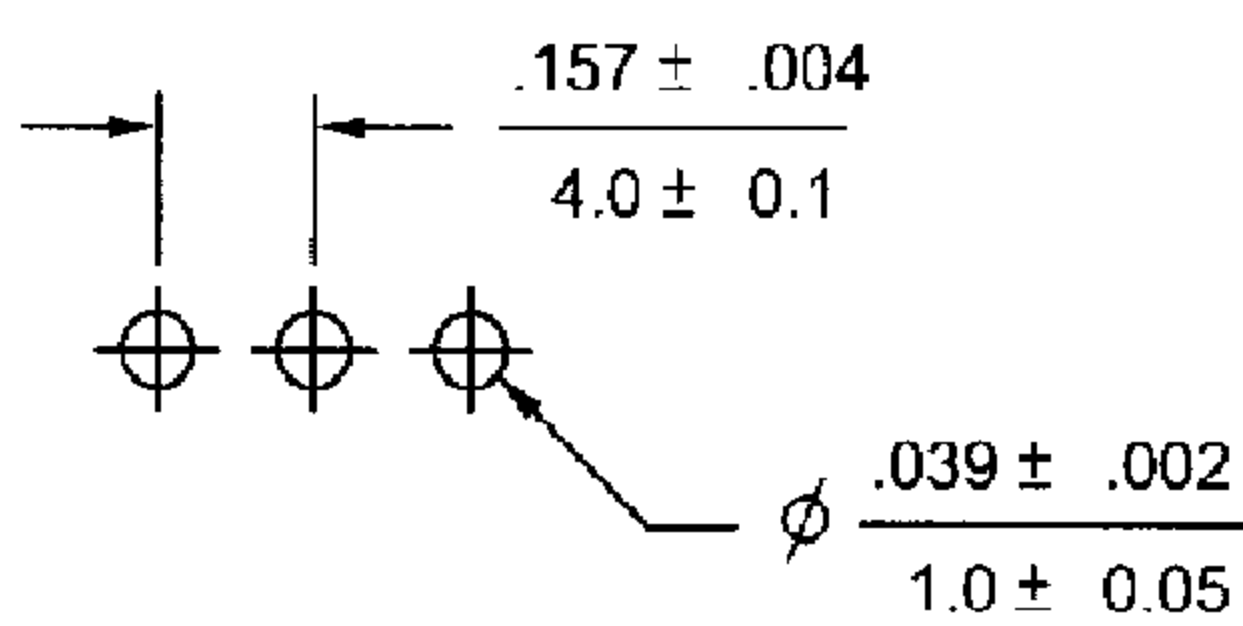

P.C.B. hole dimensions

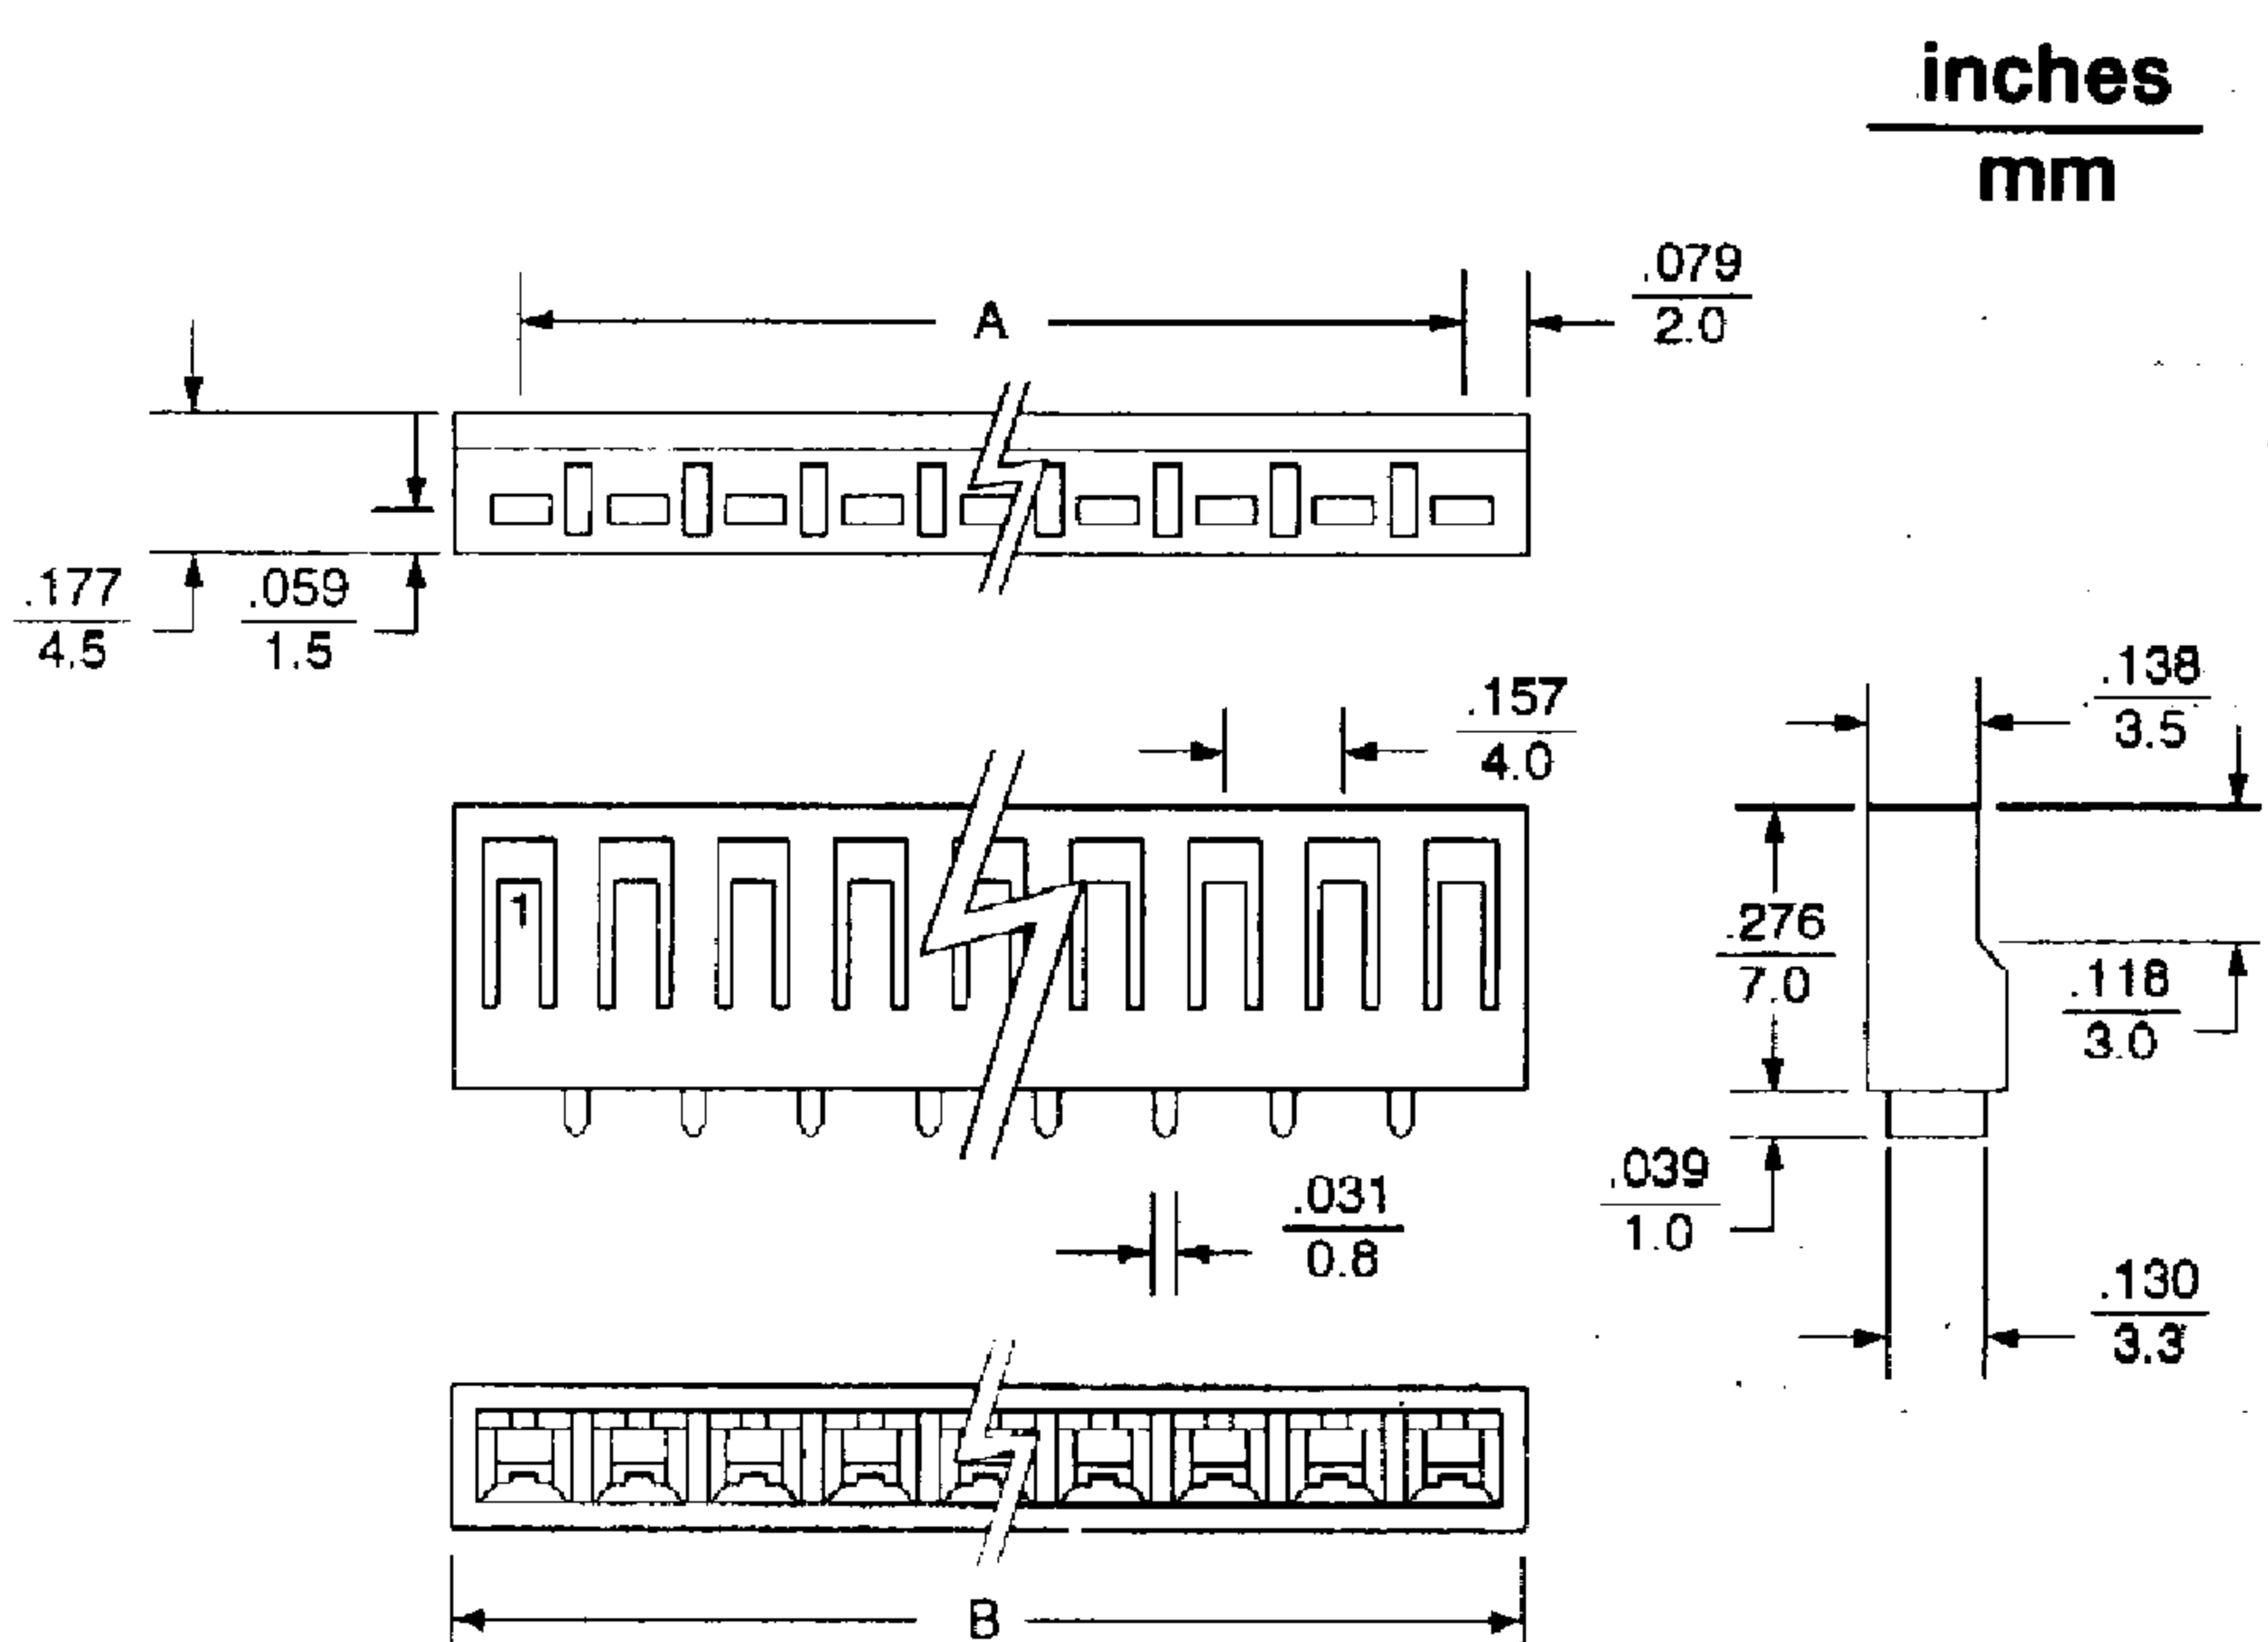

### Dimensional Information - in. (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	.157 ( 4.0)	.315 ( 8.0)	7	.945 (24.0)	1.102 (28.0)	12	1.732 (44.0)	1.890 (48.0)
3	.315 ( 8.0)	.472 (12.0)	8	1.102 (28.0)	1.260 (32.0)	13	1.890 (48.0)	2.047 (52.0)
4	.472 (12.0)	.630 (16.0)	9	1.260 (32.0)	1.417 (36.0)	14	2.047 (52.0)	2.205 (56.0)
5	.630 (16.0)	.787 (20.0)	10	1.417 (36.0)	1.575 (40.0)	15	2.205 (56.0)	2.362 (60.0)
6	.787 (20.0)	.945 (24.0)	11	1.575 (40.0)	1.732 (44.0)			