


TDC Power Products Co.,Ltd  
Cheng Yen Electronic Co.,Ltd

**SA8B-280-0260MT**

INPUT VOLTAGE : 220~240VAC  
OUTPUT VOLTAGE : 28VDC

## SWITCHING POWER SUPPLY SPECIFICATION REV:1-0

### Drawing:

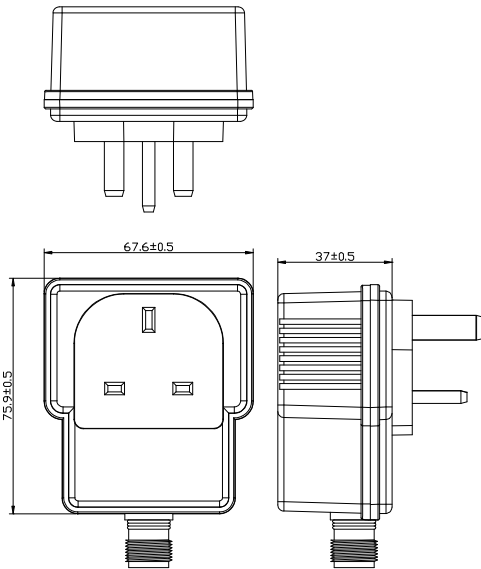

### ELECTRONICAL SPECIFICATION

INPUT VOLTAGE : 220~240 Vac    INPUT RANGE VOLTAGE 200~264 Vac  
 INPUT FREQUENCY : 50 Hz    INPUT RANGE FREQUENCY 47~53 Hz  
 INPUT CURRENT : 0.127 Amp. rms. at 240 Vac  
 INRUSH CURRENT : 30 Amp. peak at 240 Vac  
 Tested At Max. load 25°C , Cold start

OUTPUT VOLTAGE : 28 V  
 REGULATION : ±5 %  
 MIN. LOAD CURRENT : 0 A    MAX LOAD CURRENT: 0.26 A  
 LOOP 1 LOAD CURRENT : 0.065 A  
 LOOP 2 LOAD CURRENT : 0.065 A  
 LOOP 3 LOAD CURRENT : 0.065 A  
 LOOP 4 LOAD CURRENT : 0.065 A  
 TOTAL OUTPUT : 7.2 W  
 POWER EFFICIENCY : 67.7% Min. at 230 Vac 50 Hz, Max. load.  
 OVER CURRENT PROTECTION , SHORT CIRCUIT PROTECTION(LATCHED SHUTDOWN)  
 OVER POWER PROTECTION : 18 W  
 OVER VOLTAGE PROTECTION : 33 Vdc Max.  
 TRANSFORMER BUILD 8 FUNCTIONAL CONTROLLER  
 1.COMBINATION 2.IN WAVES 3.SEQUENTIAL 4.SLO GLO  
 5.CHASING/FLASH 6.SLOW FADE 7.TWINKLE/FLASH 8.STEADY ON

### MECHANICAL SPECIFICATION

Dimensions : 75.9(L) \* 67.6 (W) \*37(H)mm (Tolerance as drawing)  
 Weight : 185 g Max.  
 Operating Temperature : 0°C To 40°C  
 Storage Temperature : -15°C To 50°C  
 Relative Temperature : 40°C ± 2°C  
 MTBF: 50,000 hrs to MIL-HDBK-217F    Warranty: 2 years

### STANDARD

Safty:EN61347-1,EN61347-2-11,EN61347-2-13; EMC:EN61547,EN55015,EN61000-3-2,EN61000-3-3.

Input Cable : DIRECT PLUG-IN

Output Cable : 5Pin Φ2.35 waterproof  
Female socket BK

**RELATIVE HUMIDITY** 85% RH. Non-condensing

LABEL SIZE:51.8\*60.3mm

INNER BOX:

Material: WEB

BOX: 108\*80\*95mm

CARTON: 452\*420\*305mm




Material:K=A No Nail

Q'TY: 60 PCS

N.W.: 11 KGS

G.W.: 13 KGS

MEAS: 2.05 CUFT

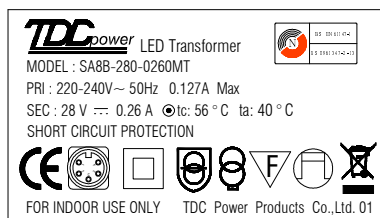

MADE IN CHINA

- 1.COMBINATION
- 2.IN WAVES
- 3.SEQUENTIAL
- 4.SLO GLO
- 5.CHASING/FLASH
- 6.SLOW FADE
- 7.TWINKLE/FLASH
- 8.STEADYON

photo

