


TDC Power Products Co.,Ltd
Cheng Yen Electronic Co.,Ltd

SA8E-280-0710MT

INPUT VOLTAGE : 220~240VAC
OUTPUT VOLTAGE : 28VDC

SWITCHING POWER SUPPLY SPECIFICATION REV:1-0

Drawing:

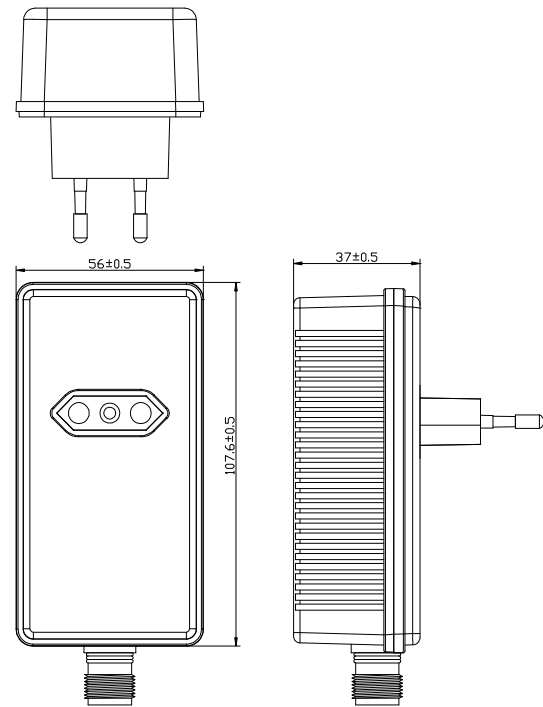

ELECTRONICAL SPECIFICATION

INPUT VOLTAGE : 220~240 Vac INPUT RANGE VOLTAGE 200~264 Vac
 INPUT FREQUENCY : 50 Hz INPUT RANGE FREQUENCY 47~53 Hz
 INPUT CURRENT : 0.3 Amp. rms. at 240 Vac
 INRUSH CURRENT : 50 Amp. peak at 240 Vac
 Tested At Max. load 25°C , Cold start

OUTPUT VOLTAGE : 28 V
 REGULATION : ±5 %
 MIN. LOAD CURRENT : 0 A MAX LOAD CURRENT: 0.71 A
 LOOP 1 LOAD CURRENT : 0.1775 A
 LOOP 2 LOAD CURRENT : 0.1775 A
 LOOP 3 LOAD CURRENT : 0.1775 A
 LOOP 4 LOAD CURRENT : 0.1775 A
 TOTAL OUTPUT : 19.8 W
 POWER EFFICIENCY : 80% Min. at 230 Vac 50 Hz, Max. load.
 OVER CURRENT PROTECTION , SHORT CIRCUIT PROTECTION(LATCHED SHUTDOWN)
 TOTAL POWER PROTECTION : 40 W
 OVER VOLTAGE PROTECTION : 33 Vdc Max.
 TRANSFORMER BUILD 8 FUNCTIONAL CONTROLLER
 1.COMBINATION 2.IN WAVES 3.SEQUENTIAL 4.SLO GLO
 5.CHASING/FLASH 6.SLOW FADE 7.TWINKLE/FLASH 8.STEADY ON

MECHANICAL SPECIFICATION

Dimensions : 107.6 (L) * 56 (W) * 37 (H)mm (Tolerance as drawing)
 Weight : 240 g Max.
 Operating Temperature : 0°C To 40°C
 Storage Temperature : -15°C To 50°C
 Relative Temperature : 40°C ± 2°C
 MTBF: 50,000 hrs to MIL-HDBK-217F Warranty:2 years

Input Cable : DIRECT PLUG-IN

Output Cable : 5Pin Φ 2.35 waterproof
 Female socket BK

LABEL:

SIZE:40*91.9mm



STANDARD

Safty:EN61347-1,EN61347-2-11,EN61347-2-13; EMC:EN61547,EN55015,EN61000-3-2,EN61000-3-3.

RELATIVE HUMIDITY 85% RH. Non-condensing

INNER BOX:

Material: WEB

BOX: 140*80*95mm

CARTON: 440*420*400 mm



Material:K=A No Nail

Q'TY: 60 PCS

N.W.: 14.4 KGS

G.W.: 16.4 KGS

MEAS: 2.61 CUFT



photo

