

# 0.05" (1.27mm) Female Header







## Single Row 08 Contacts

### SMT Type Profile : 2.05mm

#### SPECIFICATION

Current Rating : 1 Amp  
 Insulator Resistance : 5000 Megohms min.  
 Contact Resistance : 20 Milliohms Max.  
 Dielectric Withstanding : AC 500 V  
 Operating Temperature : -40°C ~ +105°C  
 Max Processing Temp : 230°C For 30~60 Seconds  
 (260°C For 10 Seconds)

Contact Material : Phosphor Bronze  
 Insulator Material : Polyester, UL 94V-0  
 Standard : Nylon-6T  
 Contact Plated : Full Gold, Full Tin  
 Standard : Gold Flash all Over Nickel

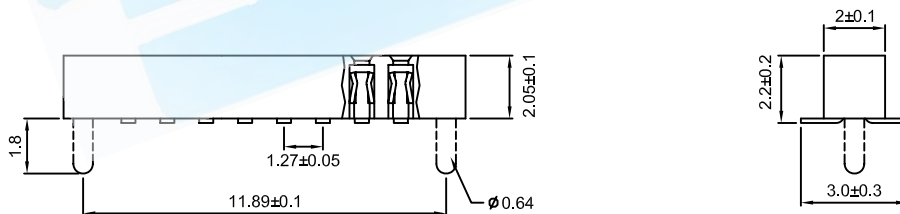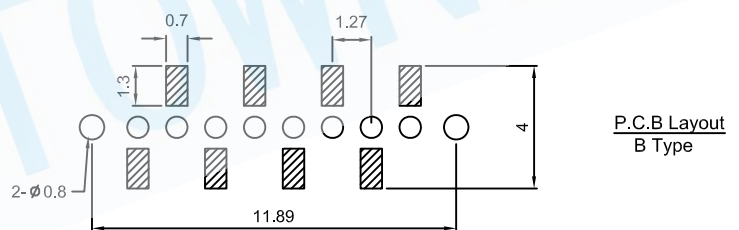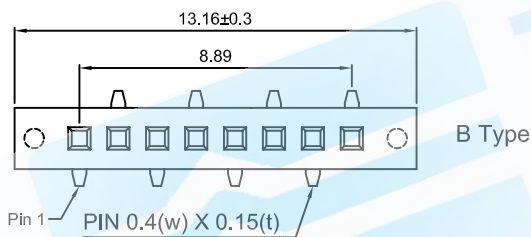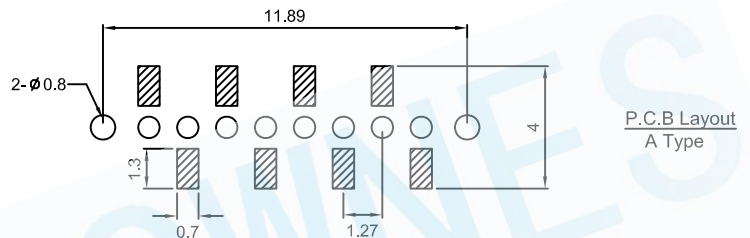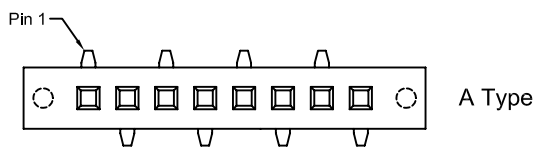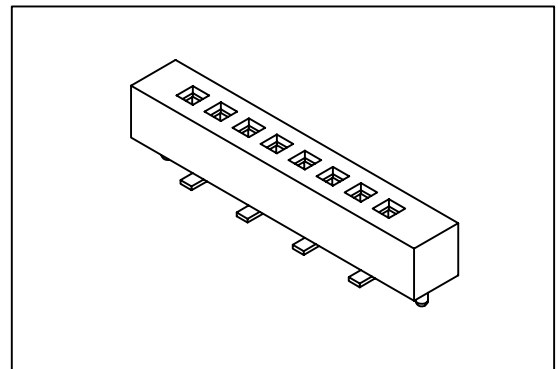

## HOW TO ORDER

**F210 - 1 \* 08 M XX - 1 X X**

Series No. : F210  
 Row Type : 1 : 1 Row  
 No. of Contact : 08  
 Terminal Type : M : SMT Type  
 Contact Plated : XX  
 Packing Type : A : In Tube  
 B : W/Cap(Clip) In tube  
 C : W/Film In Tube  
 D : W/Cap In Tape & Reel  
 E : W/Film In Tape & Reel  
 Pin Polarization : A : A Type  
 B : B Type  
 Board Lock : 1 : W/ Locating Peg

Full Gold Type	Full Tin Type
GF : Gold Flash	T1 : Tin 100u"
G1 : Gold 3u"	T2 : Tin 200u"
G2 : Gold 5u"	
G3 : Gold 10u"	
G4 : Gold 15u"	
G5 : Gold 20u"	
G6 : Gold 30u"	