

## .118" (3.00mm) Single Row Housing

### 13645 Series (Receptacle)





#### FEATURES:

- . 2-12 Circuits
- . Positive latching to mating headers or plugs
- . Nylon, [UL 94V-0], Nature
- . Fully polarized to mating and plugs
- . Fully isolated terminals
- . Accepts double cantilever crimp terminal [13025-T-T]
- . Integral pull tabs for ease in unmating

#### SPECIFICATIONS:

- . Voltage rating: 9A AC. DC Per circuit
- . Current rating: 5A AC. DC Per circuit
- . Contact resistance: Initial Value/10mΩ max.
- . Insulation resistance: 1000 MΩ min
- . Withstand Voltage: 1500V AC/minute

UNIT: INCH  
MM

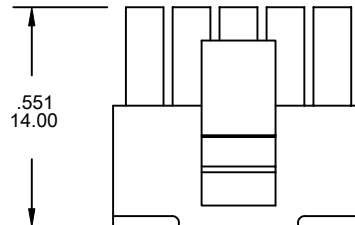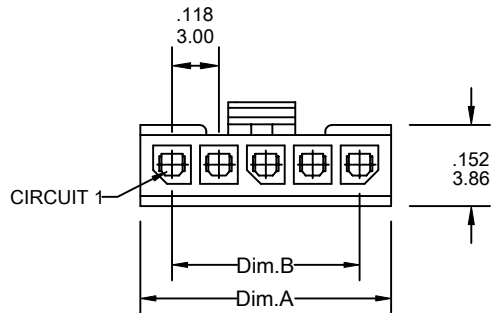

### Ordering Information 13645 Series

Series No.	No. of Contacts	Material	
13645	02P	V0	A
13645 Series	02P ~ 12P	V0: UL 94V-0,Black	RoHs

### Dimensional Information

Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20	Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20	Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20
2	.270 6.85	.118 3.00	3	.388 9.85	.236 6.00	4	.506 12.85	.354 9.00

\* FOR CIRCUIT SIZES 5 THROUGH 12 ADD .118" OR 3.00MM FOR EACH ADDITIONAL PIN.