

.165" (4.20mm) Dual Row Straight Angle Header (Plug)

15556 Series

(Plug)


FEATURES:

- . 2-24 Circuits
- . Positive Housing locks
- . Nylon 66 [UL 94V-2] or [UL 94-0], Nature
- . 10 milliohm contact resistance
- . Straight Angle, Dual Row Peg Mounted
- . Fully isolated terminals
- . Low engagement force terminals

SPECIFICATIONS:

- . Current rating: 9A AC. DC Per circuit
- . Voltage rating: 600 (RMS)
- . Temperature range: -40°C ~ +105°C
- . Contact resistance: Initial Value/10mΩ max.
After environmental testing
/20mΩ max.
- . Insulation resistance: 1000 MΩ min
- . Withstand Voltage: 1500V AC/minute
- . Applicable PC board thickness: .070"[1.78mm] max

UNIT: INCH
MM

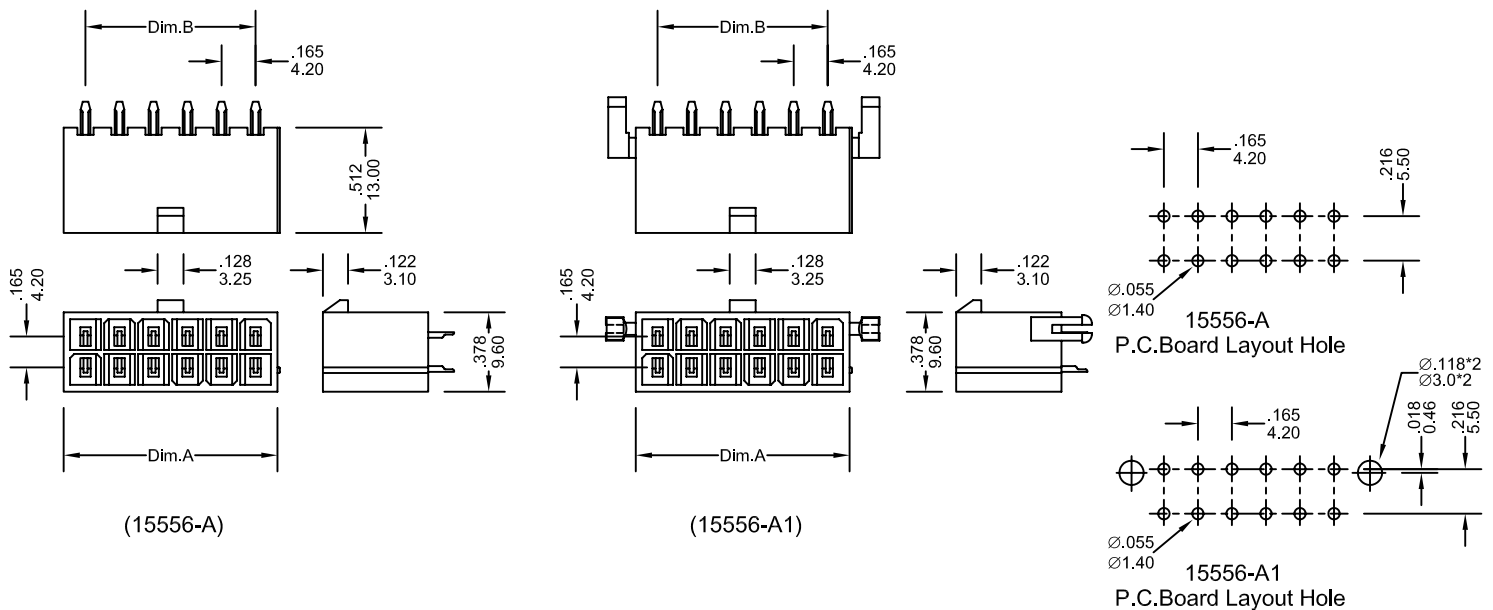

Ordering Information 15556 Series

Series No.	No. of Contacts	Contact Plating	Contact Type	Material	RoHs
15556	- 2X07P	T	A	V0	- PB
15556 Series	2X01P ~ 2X12P	T: Tin S1: Gold Flash S5: 5u" Gold S10: 10u" Gold S15: 15u" Gold S30: 30u" Gold [S: Selective Gold]	A: without Pegs A1: with pegs	V0: UL 94V-O, Nature V2: UL 94V-2, Nature	

Dimensional Information

Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20	Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20	Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20
2	.213 5.40	—	4	.378 9.60	.165 4.20	6	.543 13.80	.330 8.40

* FOR CIRCUIT SIZES 8 THROUGH 24 ADD .165" OR 4.20MM FOR EACH ADDITIONAL PIN.