

.062" (1.58mm) Power Connector (Receptacle)

1580-F Series 1580-FA Series (Ear)







FEATURES:

- . 1,2,3,4,5,6,9,12 and 15 Circuits
- . Integrally molded polarization
- . 94V-2 rated nylon
- . Accept VEN .062" (1.58mm) diameter terminal [1580-TF-TBS-T]
- . Integrally molded mounting ears available
- . Friction lock





SPECIFICATIONS:

- . Current rating: 5A AC, DC
- . Voltage rating: 250 (RMS)
- . Temperature range: -40°C ~ +125°C
- . Contact resistance: Initial Value/10mΩ max.
After environmental testing /20mΩ max.
- . Insulation resistance: 5000 MΩ min
- . Withstand Voltage: 1500V AC/minute
- . Applicable wires: AWG #26 ~ #18

UNIT: INCH
MM

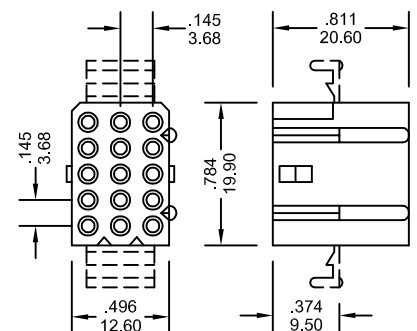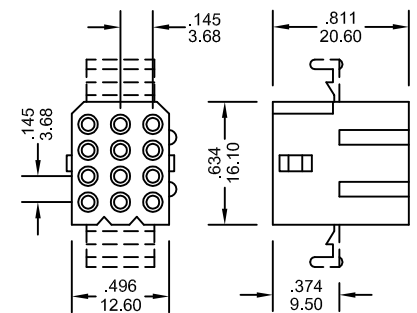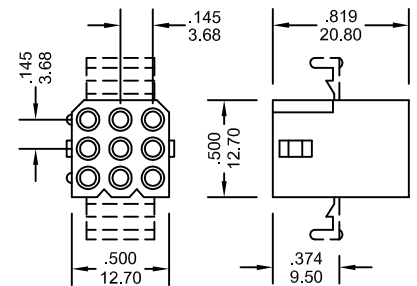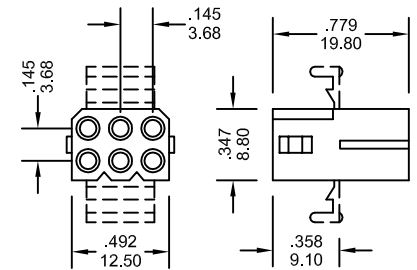

(04P1 TYPE)

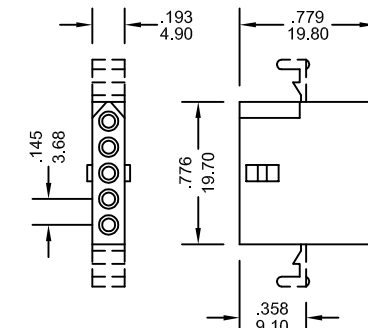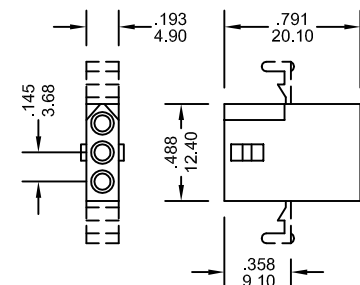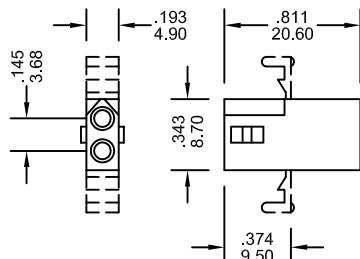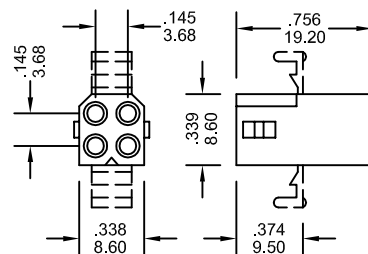

Ordering Information 1580-F, 1580-FA Series

Series No.	No. of Contacts	Housing Type	Material	
1580	- 04P	F	- V2	- A
1580 Series	01P 04P 09P 02P 04P1 12P 03P 05P 15P 06P	F: Female FA: Female / Ear	V2: UL 94V-2, Nature	RoHs