


2492-CF-TM-T Series

FEATURES:

- . DIP TYPE, Applicable pc board
- . Accepts 2.54mm pitch Flexible Flat Cable
- . Material is copper alloy
- . thickness: .0079" [0.2mm]
- . Q'TY: 20K pcs/reel

UNIT: INCH
MM

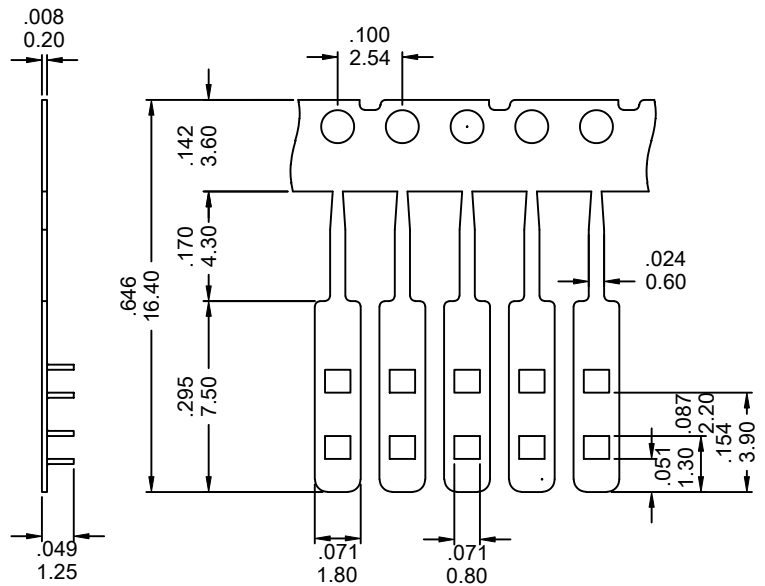

Ordering Information


Series No.	Material	Contact Plating	
2492-CF-TM	TPS	T	PB
2492-CF-TM Series	TPS: Phos.Bronze	T: Tin S1: Gold Flash S5: 5u" Gold S10: 10u" Gold S15: 15u" Gold S30: 30u" Gold [S: Selective Gold]	RoHs

2492-CF-TF-T Series

FEATURES:

- . 2492-CF-T-T Series Mates with VEN [2492-CF] Series female connector
- . Accepts 2.54mm pitch Flexible Flat Cable
- . Material is copper alloy
- . thickness: .0079" [0.2mm]
- . Q'TY: 20K pcs/reel

UNIT: INCH
MM

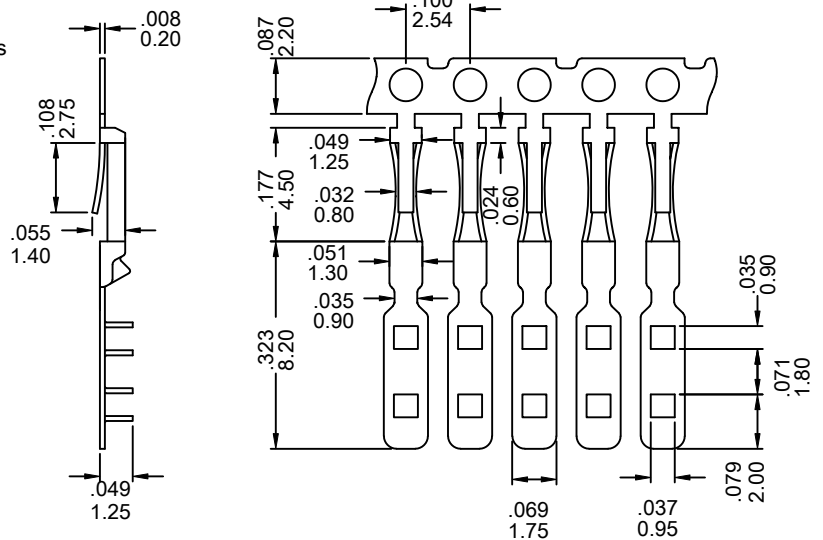

Ordering Information

Series No.	Material	Contact Plating	No.	
2492-CF-TF	TPS	T	1	PB
2492-CF-TF Series	TPS: Phos.Bronze	T: Tin S1: Gold Flash S5: 5u" Gold S10: 10u" Gold S15: 15u" Gold S30: 30u" Gold [S: Selective Gold]	1: Insert force:370g withdraw force:300g 2: Insert force:230g withdraw force:180g 3: Insert force:140g withdraw force:100g	RoHs
2492-CF-TF Series 01P~06P Applicable No. 1 07P~15P Applicable No. 2 15P~80P Applicable No. 3				