

.079" (2.00mm) Pitch Male Power (Futurebus) Header

25060 Series


Vertical, 5 rows wide body press fit & solder type

FEATURES:

- . 10 Circuits
- . Housing: Glass Filled LCP, UL 94V-0
- . Contact: Phosphor Bronze
- . Mates With: 24884
- . 10 Circuits modular unit fits into same space and footprint as 30 Circuits signal module
- . Sturdy male blade pins avoid bending and dissipate heat
- . Post-plated pins provide high reliability
- . Code key insertion holes secure code keys and provide proper mating alignment
- . PCB retention pegs provide additional hold-down

SPECIFICATIONS:


- . Current rating: 3.0A
- . Voltage rating: 1000V
- . Temperature range: -55°C ~+ 125°C
- . Contact resistance: 10mΩ max.
- . Insulation resistance: 5000mΩ min.
- . Dielectric withstanding voltage: 750V AC

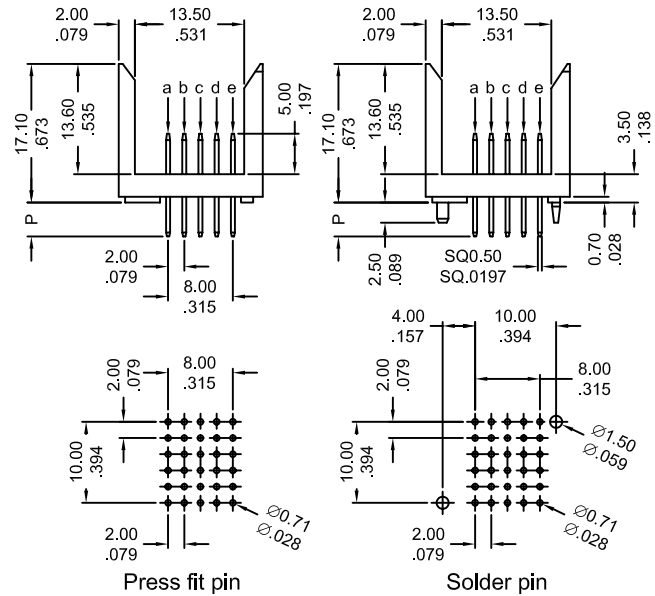

Recommended P.C Board

Hole Layout

Thickness: $\frac{1.60}{.063}$ & $\frac{2.40}{.094}$

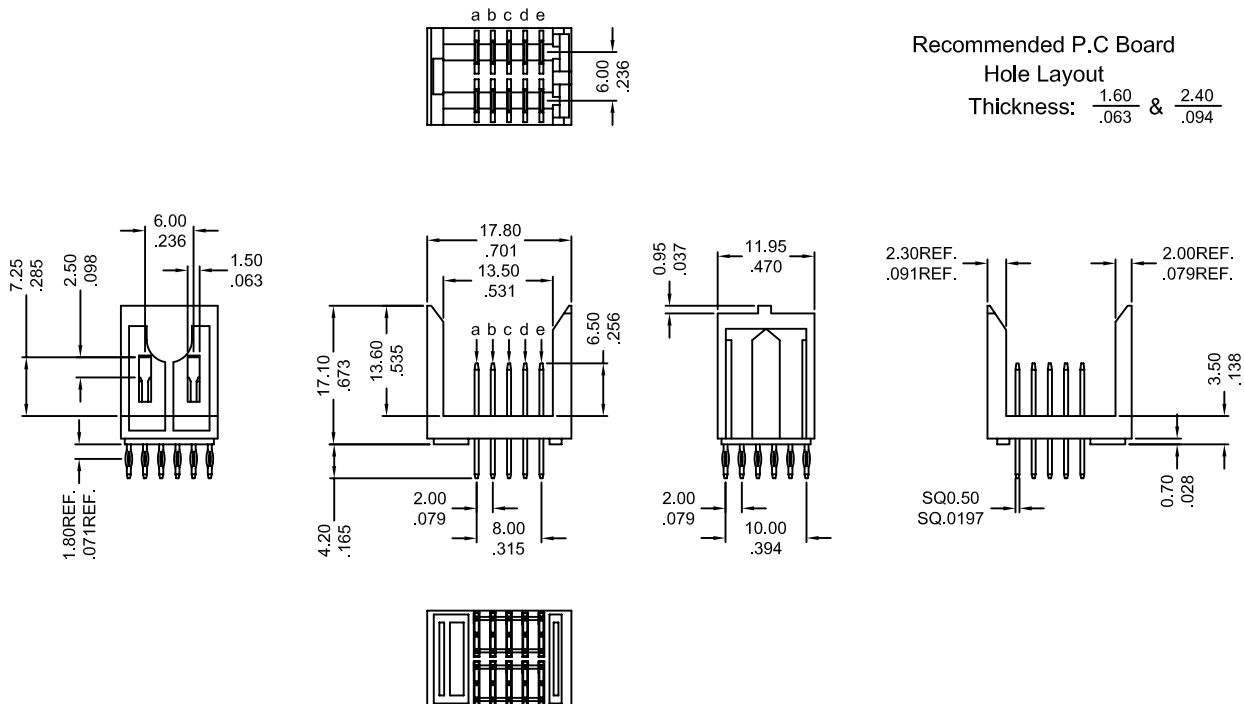

Ordering Information 25060 Series Press Fit and Solder Dip

| Series No. | No. of Contact | DIP Style | Premating and Solder Tail | | |
|--------------|----------------|-------------------------|---|------|---|
| 25060 | - 10P | 2 | 1A | - PB | pins lay-out please refer to our attachment of premating and solder tail request form other special lay-out please consult to factory |
| 25060 Series | 10P | 1:solder 2:press fit | 1A:Premating 6.5mm Solder Tail 4.2mm | RoHs | |