


## 4000-T Series

### FEATURES:

- . 4000-T Series Mates with VEN [4000] Series female connector
- . Accepts AWG 22-30 wire range
- . Material is Brass or Phos. Bronze
- . Qty/Reel: 10K PCS


UNIT: INCH  
MM

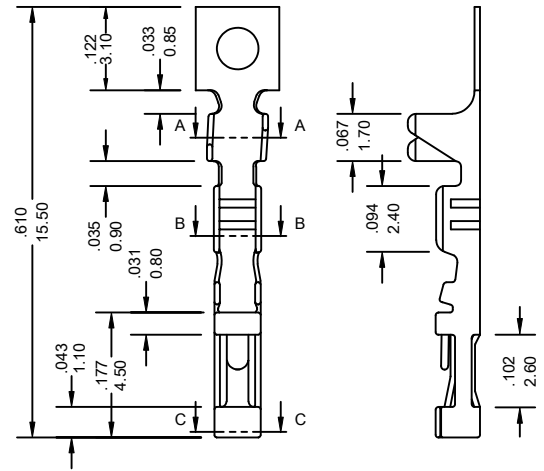

Wire Gauge (AWG)	22	24	26	28	30
Pull Out Force (lb)	10	8	6	4	3

### Ordering Information

Series No.	Material	Contact Plating	No.		
4000-T	BS	T	1	A	PB
4000-T Series	BS: Brass PS: Phos. Bronze	T: Tin G1: Gold Flash G5: 5u" Gold G10: 10u" Gold G15: 15u" Gold G30: 30u" Gold [G: Full Gold]	1: insert force:370g withdraw force:300g 2: insert force:230g withdraw force:180g 3: insert force:140g withdraw force:100g	Reel Type	RoHs
4000-T Series 01P~06P Applicable No.1 07P~15P Applicable No.2 15P~80P Applicable No.3					

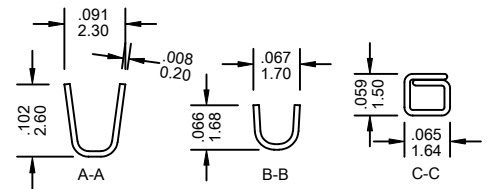


## 4000-TM Series

### FEATURES:

- . 4000-TM Series Mates with VEN [4000] Series male connector
- . Material is Brass or Phos. Bronze
- . Qty/Reel: 10K PCS

UNIT: INCH  
MM

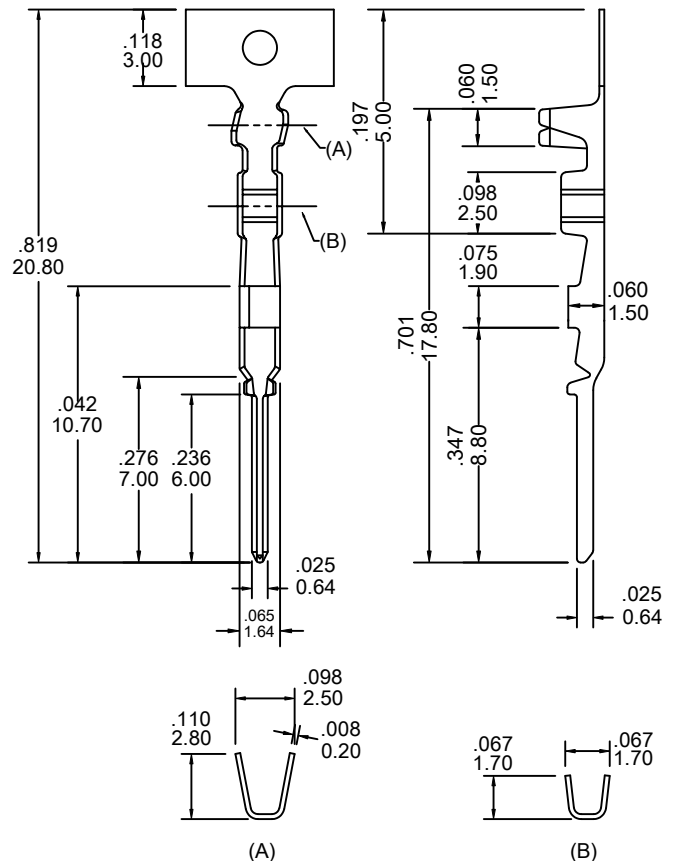

### Ordering Information

Series No.	Material	Contact Plating	
4000-TM	TBS	T	PB
4000-TM Series	TBS: Brass TPS: Phos. Bronze	T: Tin G1: Gold Flash G5: 5u" Gold G10: 10u" Gold G15: 15u" Gold G30: 30u" Gold [G: Full Gold]	RoHs