

**.079"X.079" (2.00mmX2.00mm) Center Dual Row PCB Header
.079" (2.00mm) Plastic High**



6200-H Series


FEATURES:

- . 4-80 Circuits
- . .0197"[0.50mm] Square wire pins
- . PBT or Nylon 6T, [UL 94V-0]
- . Stackable end-to-end
- . Easy breakaway to smaller sizes
- . Straight or right angle pins

SPECIFICATIONS:


- . Current rating: 2A AC, DC
- . Voltage rating: 250V AC, Maximum
- . Temperature range: -40°C ~+ 105°C
- . Contact resistance: Initial Value/10mΩ max.
After environmental testing /20mΩ max.
- . Insulation resistance: 5000 MΩ min
- . Withstand Voltage: 1500V AC/minute
- . Applicable PC Board thickness: .063"[1.6mm]

UNIT: INCH
MM

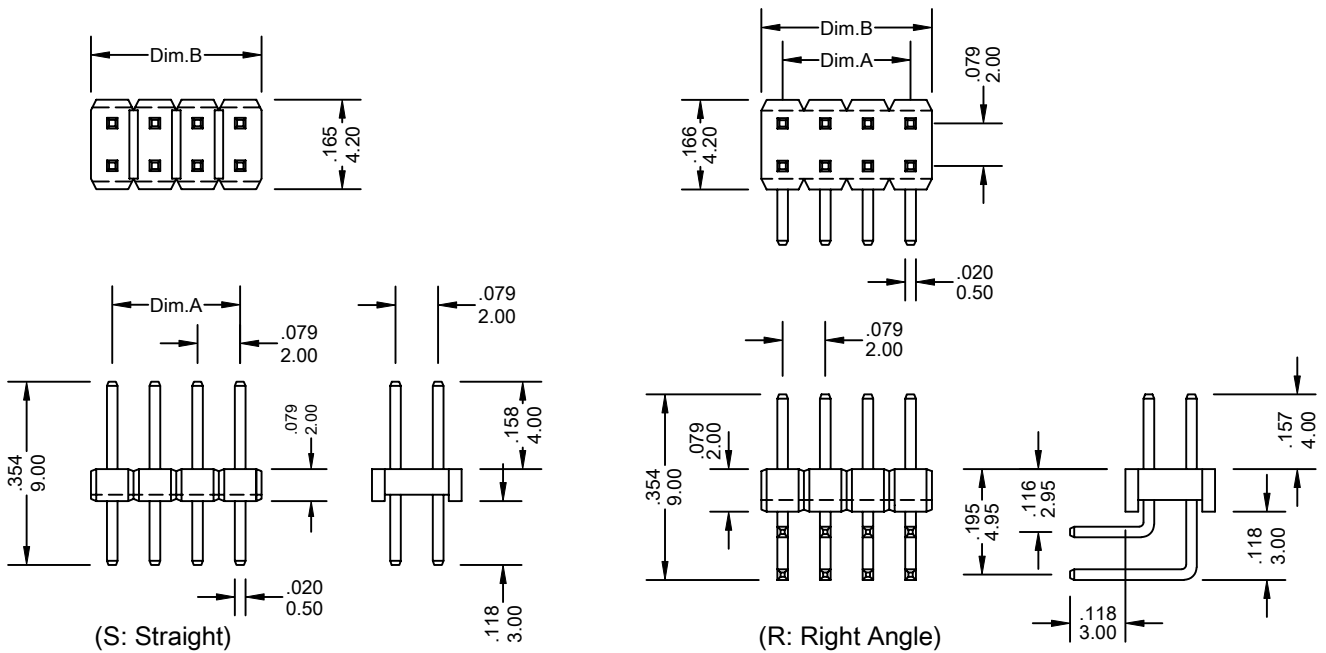

Ordering Information 6200-H Series

Series No.	No. of Contacts	Contact Type	Contact Plating	Material	
6200-H	- 2X04P	S	G1	- 6T	- PB
6200-H Series	2X02P ~ 2X40P	S: Straight R: Right Angle	T: Tin G1: Gold Flash G5: 5u" Gold G10: 10u" Gold G15: 15u" Gold G30: 30u" Gold [G: Full Gold]	Nylon 6T	RoHs
* PIN LENGTH CAN BE CHANGED TO CUSTOM'S SPECIFICATION					



Dimensional Information

Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20	Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20	Circuits	Dim.A± .008 0.20	Dim.B± .008 0.20
4	.079 2.00	.158 4.00	6	.158 4.00	.239 6.00	8	.239 6.00	.315 8.00

6200-H Series

* FOR CIRCUIT SIZES 10 THROUGH 80 ADD .079" OR 2.00MM FOR EACH ADDITIONAL PIN.