

.079" (2.00mm) Center Crimp Terminal Housing

6700 Series


FEATURES:

- . 2-15 Circuits
- . Nylon 66, [UL 94V-0]
- . Accepts double cantilever crimp terminal [6700-T]

SPECIFICATIONS:

- . Current rating: 2A AC, DC
- . Voltage rating: 500V AC, Maximum
- . Temperature range: -40°C ~ +105°C
- . Contact resistance: Initial Value/10mΩ max.
After environmental testing
/20mΩ max.
- . Insulation resistance: 1000 MΩ min
- . Withstand Voltage: 1500V AC/minute
- . Applicable wires: AWG #30 ~ #24

UNIT: INCH
MM

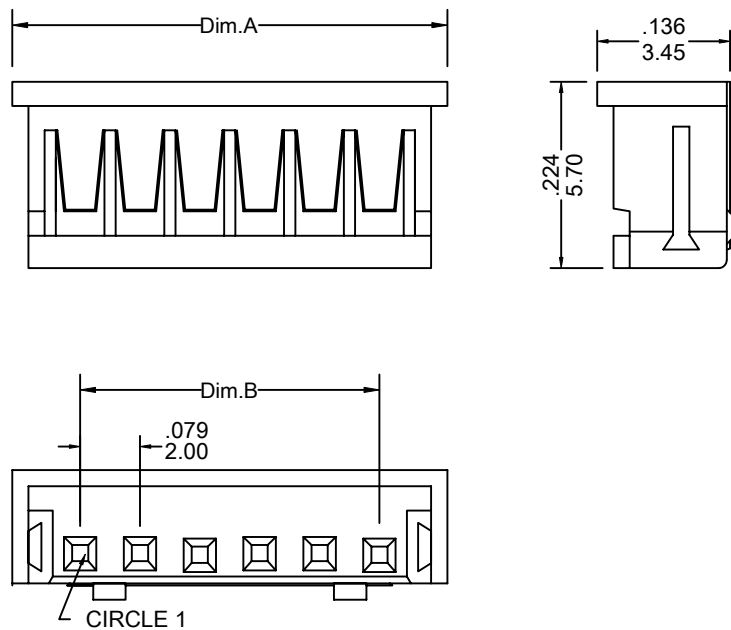

Ordering Information 6700 Series

Series No.	No. of Contacts	
6700	- 06P	- A
6700 Series	02P ~ 15P	RoHs

Dimensional Information

Circuits	Dim.A± 0.008 0.20	Dim.B± 0.008 0.20	Circuits	Dim.A± 0.008 0.20	Dim.B± 0.008 0.20	Circuits	Dim.A± 0.008 0.20	Dim.B± 0.008 0.20
2	.228 5.80	.079 2.00	3	.307 7.80	.157 4.00	4	.386 9.80	.236 6.00

6700 Series

* FOR CIRCUIT SIZES 5 THROUGH 15 ADD .079" OR 2.00MM FOR EACH ADDITIONAL PIN.