


9225-T Series

FEATURES:

- . 9225-T Series Mates with VEN [9225] female connector
- . Accepts AWG 26-32 wire range
- . Material is Phos. Bronze
- . Qty/Reel: 15K PCS


UNIT: INCH
MM

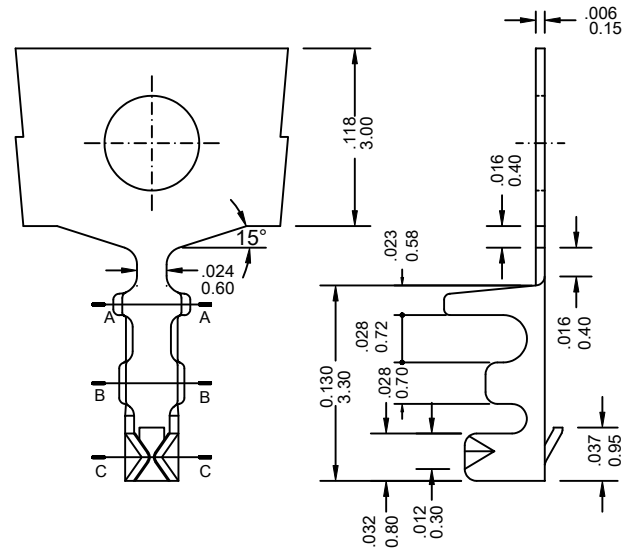


| | | | | |
|---------------------|----|----|----|-----|
| Wire Gauge (AWG) | 26 | 28 | 30 | 32 |
| Pull Out Force (lb) | 6 | 4 | 3 | 1.5 |

Ordering Information 9225-T Series


| Series No. | Material | Contact Plating | |
|---------------|------------------|---|------|
| 9225-T | PS | T | PB |
| 9225-T Series | PS: Phos. Bronze | T: Tin S1: Gold Flash S5: 5u" Gold S10: 10u" Gold S15: 15u" Gold S30: 30u" Gold [S: Selective Gold] | RoHs |



Section A-A



Section B-B




Section C-C

1500-T Series

FEATURES:

- . 1500-T Series Mates with VEN [1500]
- . Accepts AWG 26-30 wire range
- . Material is Phos. Bronze
- . Finish: Tin-Plated
- . Qty/Reel: 15K PCS


UNIT: INCH
MM

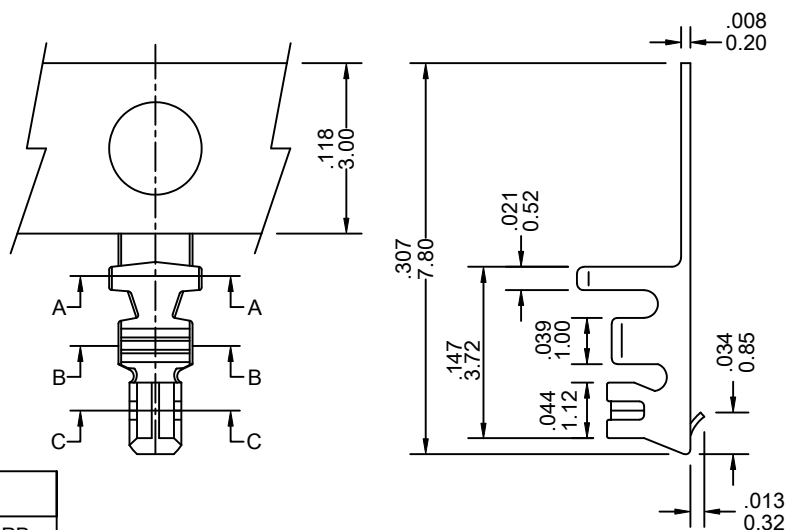


| | | | | |
|---------------------|----|----|----|-----|
| Wire Gauge (AWG) | 26 | 28 | 30 | 32 |
| Pull Out Force (lb) | 6 | 4 | 3 | 1.5 |

Ordering Information 1500-T Series


| Series No. | Material | Contact Plating | |
|---------------|------------------|---|------|
| 1500-T | PS | T | PB |
| 1500-T Series | PS: Phos. Bronze | T: Tin S1: Gold Flash S5: 5u" Gold S10: 10u" Gold S15: 15u" Gold S30: 30u" Gold [S: Selective Gold] | RoHs |



A-A



B-B



C-C