


Powerpole Modular Connector

9460 Series

- . UL Current Rating : 10A to 45A
- . UL Voltage Ratings : 600V
- . Contact Barrel Wire Size(AWG) : 10AWG to 20AWG
- . Maximum Wire Insulation Diameter : 3.48 to 4.45
- . AVG Contact Resistance(micro-ohms) : 2200 to 525
- . Insulation Withstanding : 2200
- . Contact Retention Force(lbs) : 25to 35
- . Avg. Connection/Disconnect(lbs) : 5 to 3
- . Operating Temperature Range : -20° to 105°
- . Flammability Rating of Housing Material : UL94 V-0

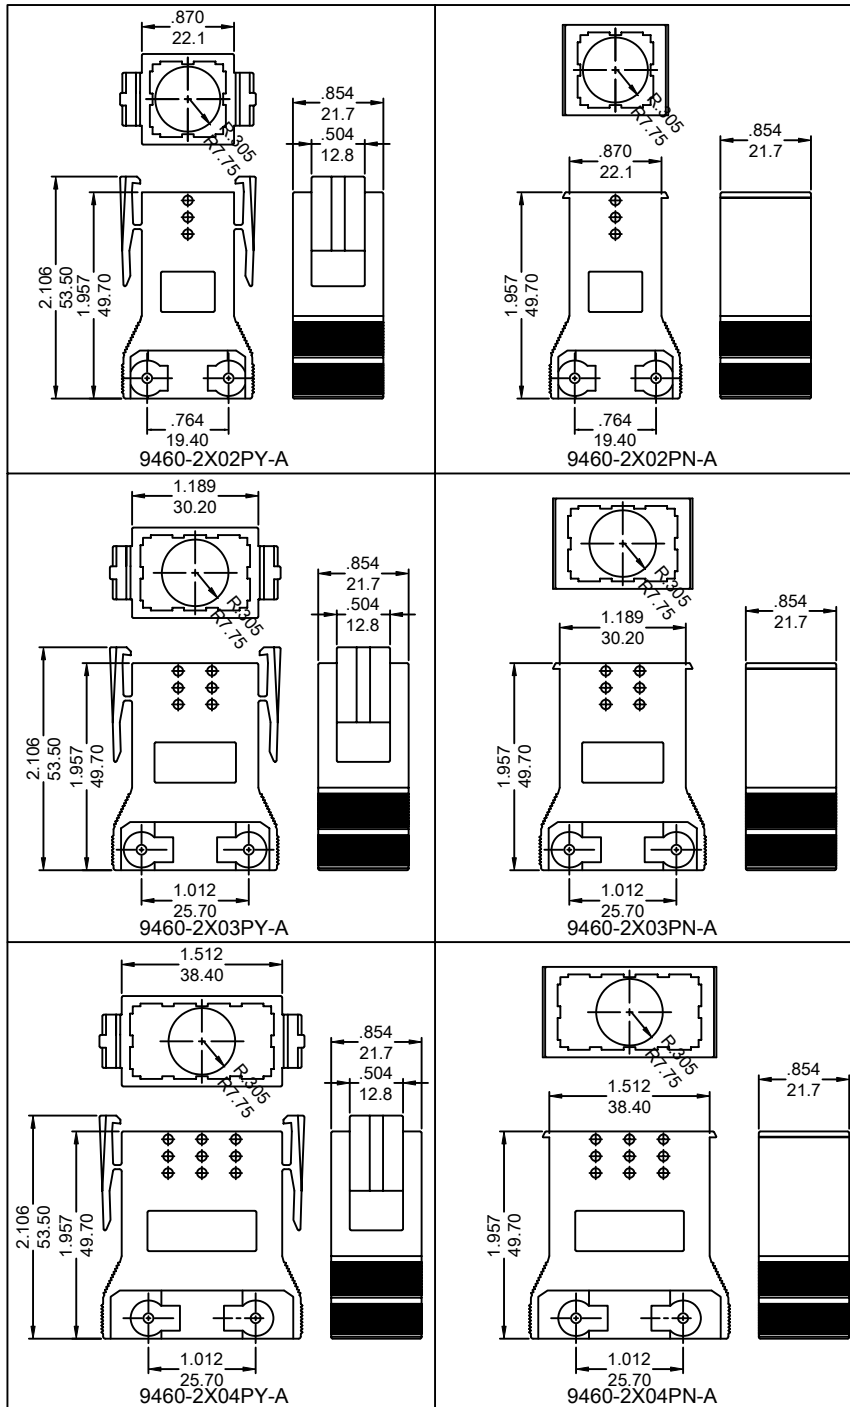

Ordering Information 9460 Series

Series No.	No. of Contacts	Latch	
9460	- 2X03P	Y	- A
9460 Series	2X02P 2X03P 2X04P	Y: With N: Without	RoHs