

## .050"X0.50" (1.27mmX1.27mm) Pin Header


### PH Series

#### FEATURES:



- . 1270 Series 2-50 Circuits, 2270 Series 4-100 Circuits
- . .018[0.46mm] Square wire pins
- . Housing: Nylon 6T
- . Contact: Brass
- . Contact Plating: TIN or Gold Plating
- . PC Board and back planes

#### SPECIFICATIONS:


- . Current rating: 1A AC. DC
- . Voltage rating: 250V AC. Maximum
- . Temperature range: -55°C ~+250°C
- . Contact resistance: Initial Value/10mΩ max.  
After environmental testing  
/20mΩ max.
- . Insulation resistance: 5000 MΩ min
- . Withstand Voltage: 500V AC/minute
- . Applicable PC Board thickness: .063"[1.6mm]

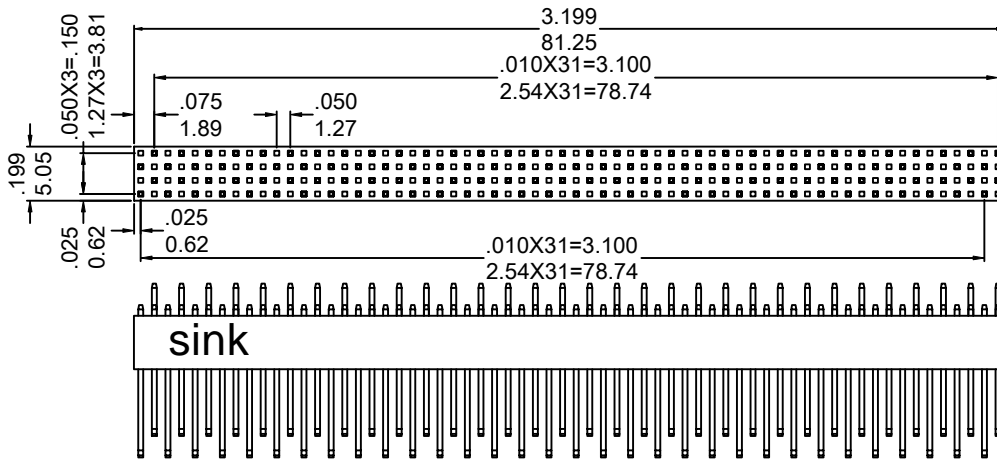

PH-127128PR-PB

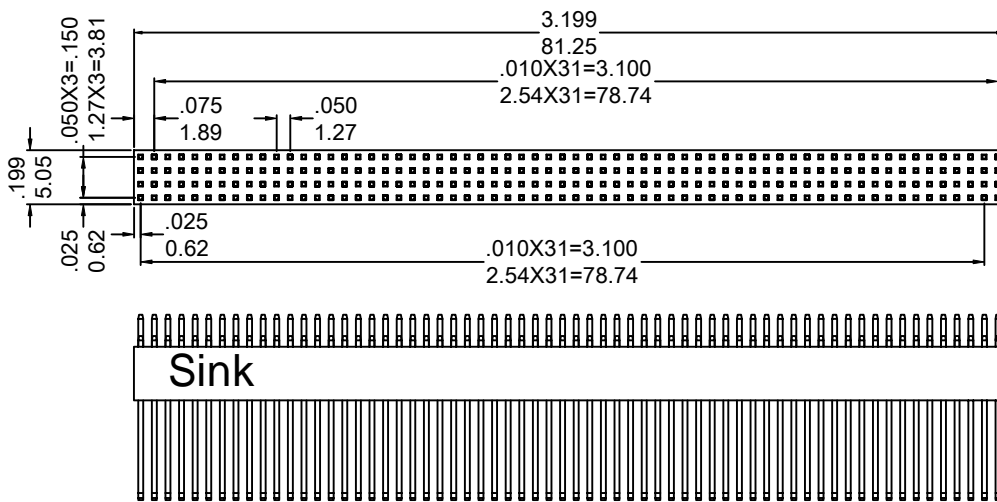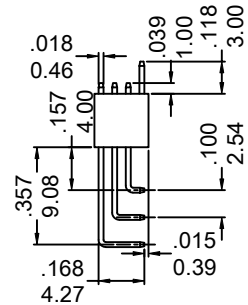

PH-127256PR-PB

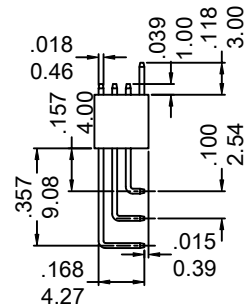

#### Ordering Information PH Series

Series No.	PITCH	No. of Contacts	Contact Type	
PH	- 127	128P	R	- PB
PH Series	PH:1.27mm	128P 256P	R: Right Angle	RoHs