


538A


Power Headers 5.08mm pitch, Ringht Angle Type

Technical Data :


Insulator Material:	Thermoplastic, UL 94V-0
Contact :	1.14x1.14mm
Contact Material:	copper alloy
Plating:	Tin plated over nickel, Lead free
Current Rating :	8.2 Amp 30° C Temperature Rise
Insulator resistance :	1000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40° C to +105° C.
Max. processing Temp:	230° C for 30-60 seconds. 260° C for 10 seconds.
Mates with :	Pitch 5.08mm, 538C; 538D

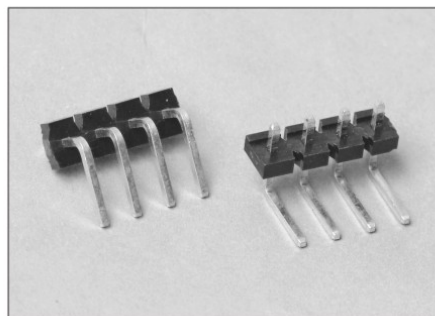

RoHS Compliant

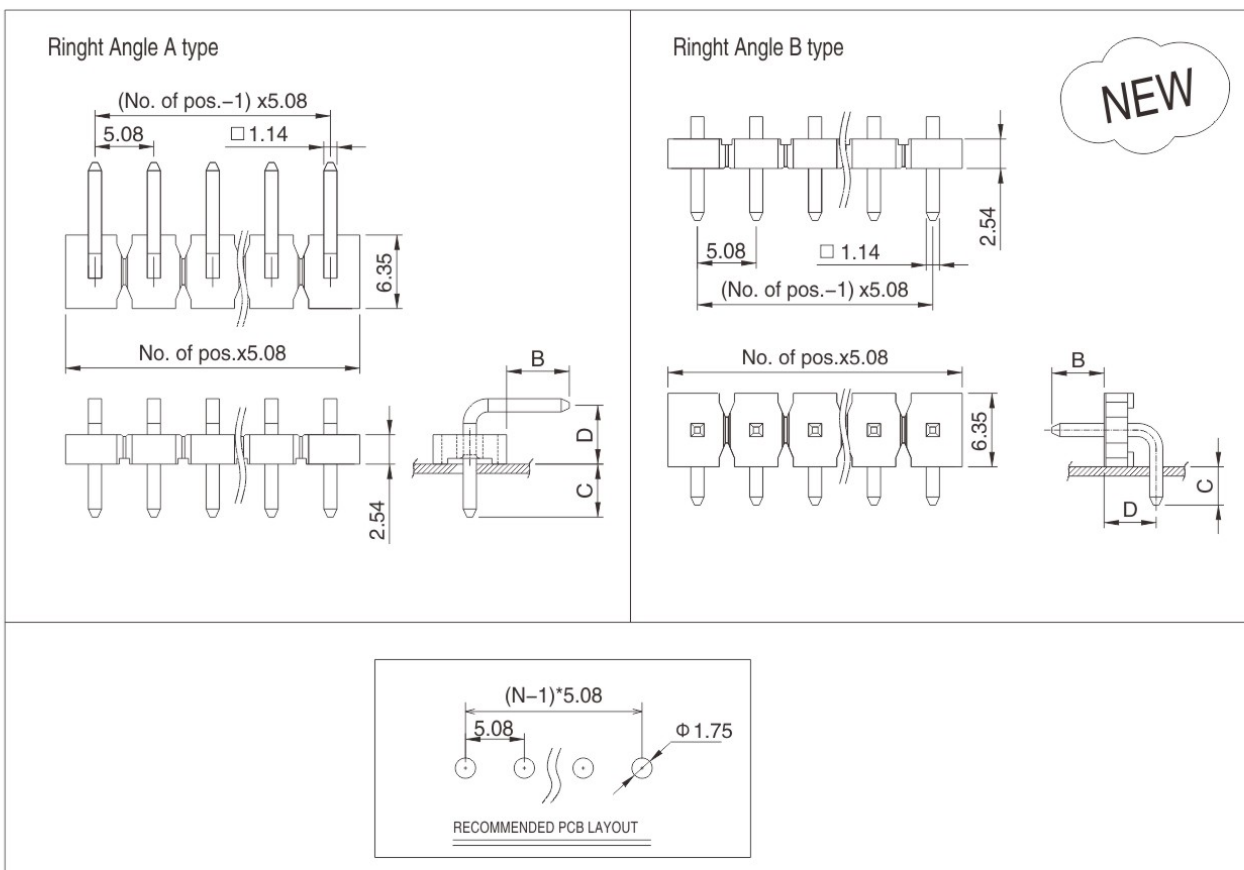

How to order



Nr. of contact	Code
Single Row 01 to 20 poles	01-20
Connector Type	Code
Ringht Angle A type	20
Ringht Angle B type	21

Terminal code	Dimensions(mm)		
	B	C	D
10	8.08	4.57	7.62
20	13.82	3.96	7.62
xxx	as request		
For Eg. B=4.6 C=6.0 D=3.9			
CODE Nr=4.60/6.0/3.9			

Plating option	Code
Tin plated	50

W.E.