


# 865


## High Speed Mini-Edge Card Socket Pitch 1.00mm Right Angle SMT Type Profile 8.98mm

### Technical Data :

Insulator Material:	High Temperature Thermoplastic,LCP,UL 94V-0
Contact :	stamped and formed,Phosphor Bronze
Plating:	Au or Sn over Nickel
Current Rating :	1.5 A @ 80 °C
Contact resistance:	20 milliohms Max.
Insulator resistance :	500 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute.
Operating Temperature:	-55 °C to +125 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	1.57mm Card

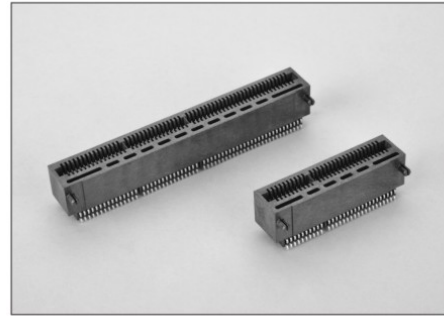

### RoHS Compliant

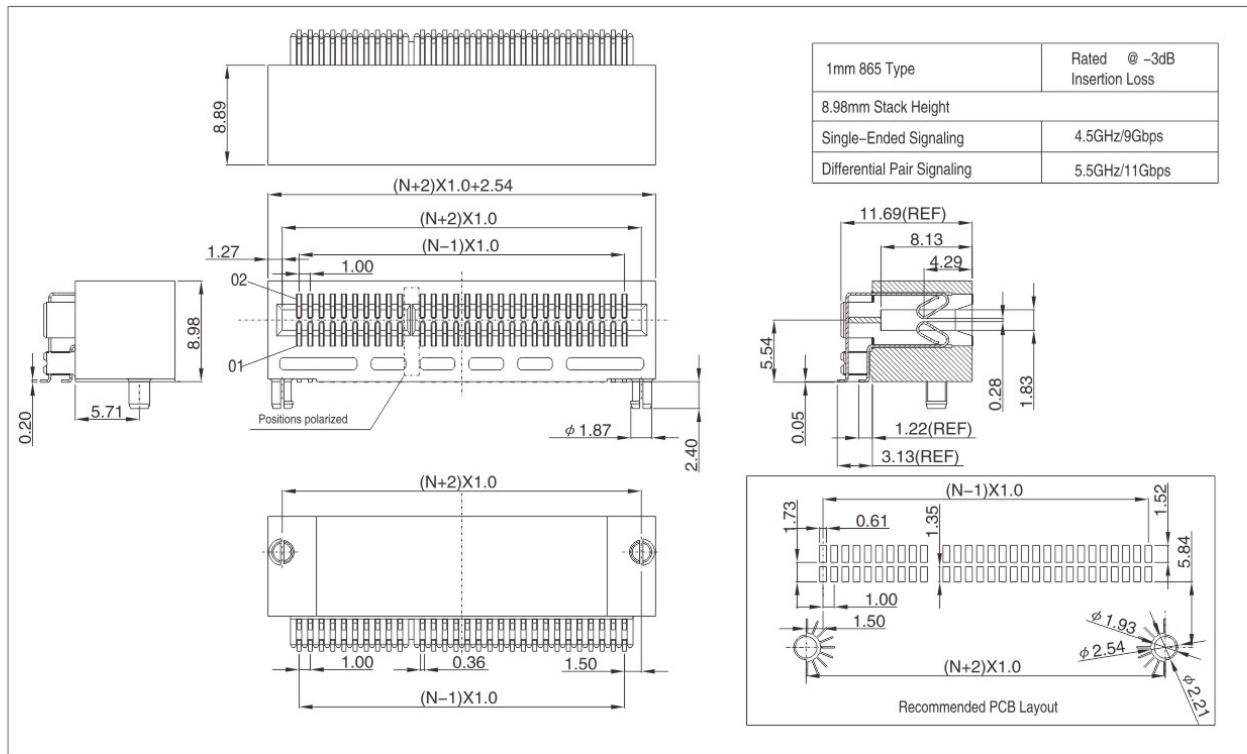

### How to order



Positions double row	Positions polarized	Number of Pin	Code
2X(N=30)	21&22	58	60
2X(N=50)	41&42	98	100
2X(N=60)	31&32 , 63&64	116	120
2X(N=70)	53&54 , 115&116	136	140

Plating Option	Code
Gold plated	10
Selective gold flash plated	60
10U" Selective gold plated	610
30U" Selective gold plated	630

Packing option	Code
Tube	1
Tape & Reel	2

Card thickness option	Code
1.57mm	1

W.E.