


# 145,151

Pin-Header-Strips Triple row -2.54 mm pitch & Dual body type


## Technical Data :

Insulator Material:	High Temperature Thermoplastic,UL 94V-0
Contact :	0.635x0.635mm.
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	3 Amp
Insulator resistance :	5000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40° C to +105° C.
Max. processing Temp:	230° C for 30-60 seconds. 260° C for 10 seconds.
Mates with :	157,622

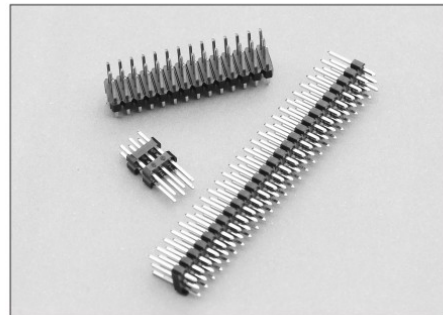


## RoHS Compliant


### 145 Serie

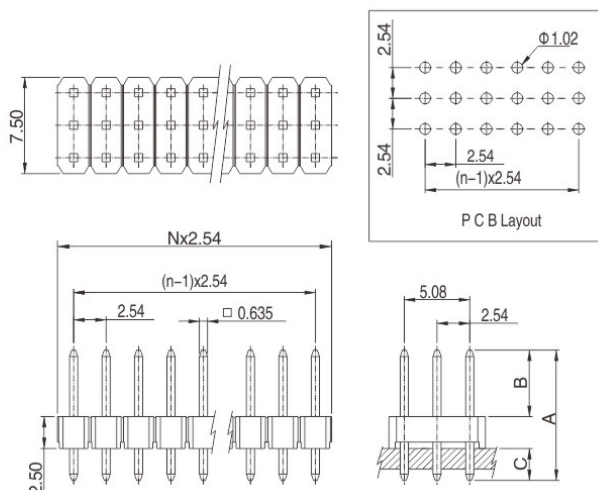

### 151 Serie

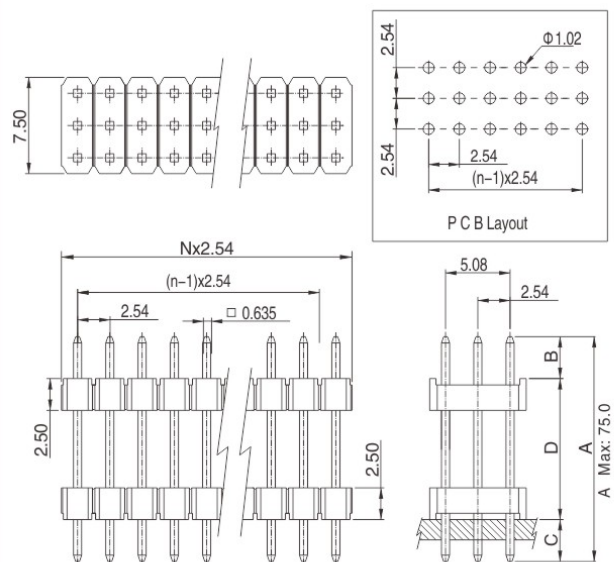

## How to order

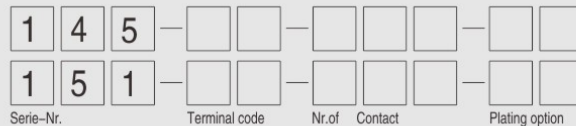

Terminal code	(145) Dimensions(mm)		
	A	B	C
10	10.20	5.20	2.50
11	10.80	5.80	2.50
12	11.30	5.50	3.30
13	12.60	6.80	3.30
14	14.00	8.20	3.30
15	14.80	9.00	3.30
16	17.90	12.10	3.30
17	19.80	14.00	3.30
18	21.60	15.80	3.30
19	22.80	17.00	3.30
20	24.90	19.10	3.30
26	14.50	8.90	3.10

AS Request B/C  
FOR Eg. B:5.2, C:2.5  
CODE Nr.=5,2/2,5

Terminal code	(151) Dimensions(mm)			
	A	B	C	D
16	17.70	5.70	3.30	8.70
17	19.80	5.70	3.30	10.80
18	21.60	5.70	3.30	12.60
19	22.80	5.70	3.30	13.80
20	24.90	5.70	3.30	15.90
21	26.70	5.70	3.30	17.70
22	28.00	5.70	3.30	20.00
23	30.80	5.70	3.30	21.80
24	37.80	5.70	3.30	28.80
25	40.80	5.70	3.30	31.80

As request  
For Eg. A=17.7 B=5.7 C=3.3 D=8.7  
Code Nr. = 17,7/5,7/3,3/8,7

Number of contact	Code
06-120 poles Triple	6-120

Plating option	Code
Full Gold Flash plated	10
Tin plated	50
Selective gold Flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

W.E.