


146PF-N, 147PF-N


Pin-Header-Press-Fit-Single&Double row-Row-Right Angle-2.54mm Pitch

Technical Data :

Insulator Material:	High Temperature Thermoplastic, PA6T, UL 94V-0
Contact :	stamped and formed, Phosphor Bronze
Plating:	Au or Sn over Nickel
Current Rating :	3Amp
Contact resistance:	20 milliohms Max.
Insulator resistance :	1000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute.
Operating Temperature:	-40° C to +105° C.
Max. processing Temp:	230° C for 30-60 seconds. 260° C for 10 seconds.
Mates with :	157,158,159,160,162,342,623,624,625

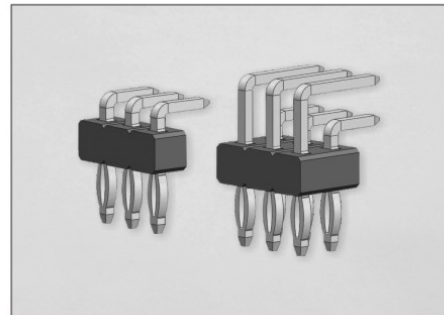

RoHS Compliant

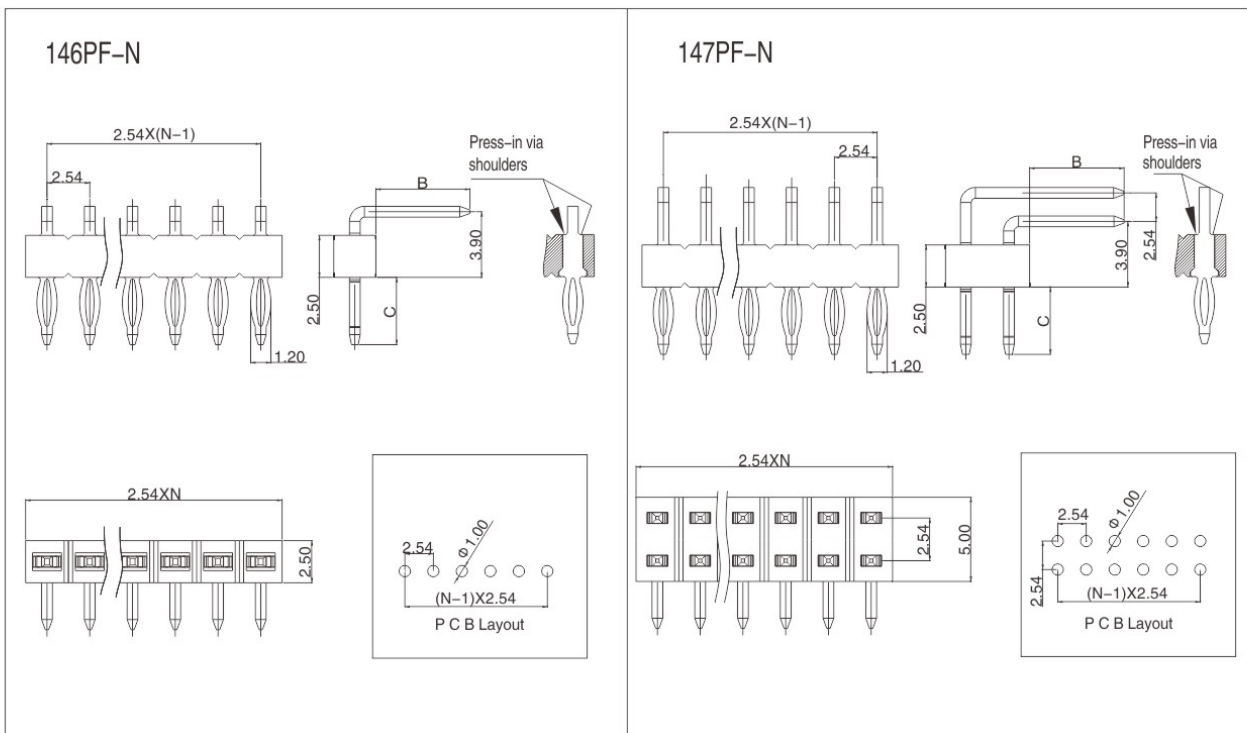

How to order

1	4	6	P	F	—	N						
1	4	7	P	F	—	N						
Serie-Nr.			Terminal code			Nr.of contact			Plating option			

Terminal code		Code
B	C	
2.8	4.0	10A
5.6	4.0	12A
As request		XX/XX
Other Size please contact factory		

Number of contact	Code
146PF-N 01-40pins	01-40
147PF-N 02-80pins	02-80

Plating option	Code
Selective gold flash plated	60
10u*Selective gold plated	610
15u*Selective gold plated	615
20u*Selective gold plated	620
30u*Selective gold plated	630

Notice:

- *146PF-N instead of 146PF
- *147PF-N instead of 147PF

W.E.