


149,150

Pin-Header-Strips-Single/Double row -2.54 mm pitch-Dual body type

Technical Data :


Insulator Material:	High Temperature Thermoplastic,UL 94V-0
Contact :	0.635x0.635mm.
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	3 Amp
Insulator resistance :	5000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40° C to +105° C.
Max. processing Temp:	230° C for 30-60 seconds. 260° C for 10 seconds.

Mates with : 157,158,159,160,162,342,348,623,624,625

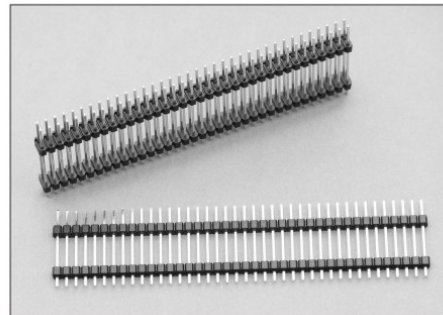


RoHS Compliant

149 serie

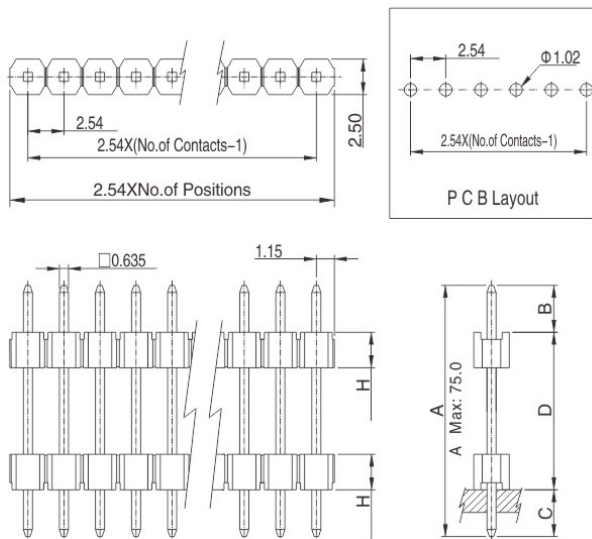

150 serie

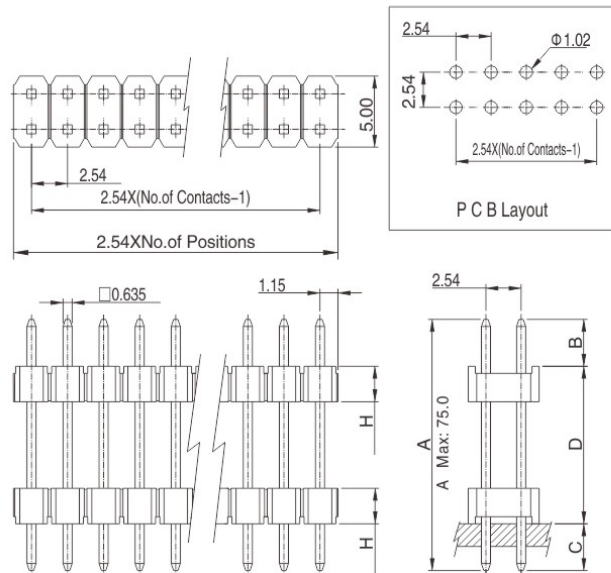

How to order

1	4	9	—	—	—	—	—	—	—	—	—	
1	5	0	—	—	—	—	—	—	—	—	—	
Serie-Nr.			Terminal code			Connector Type			Nr. of Contact		Plating option	

Terminal code	Dimensions(mm)				Terminal code	Dimensions(mm)			
	A	B	C	D		A	B	C	D
16	17.70	5.70	3.30	8.70	22	29.00	5.70	3.30	20.00
17	19.80	5.70	3.30	10.80	23	30.80	5.70	3.30	21.80
18	21.60	5.70	3.30	12.60	24	37.80	5.70	3.30	28.80
19	22.80	5.70	3.30	13.80	25	40.80	5.70	3.30	31.80
20	24.90	5.70	3.30	15.90	xx/xx/xx/xx As request				
21	26.70	5.70	3.30	17.70	For Eg. A=17.7B=5.7C=3.3D=8.7				
Code Nr. = 17.7/5.7/3.3/8.7									

Number of contact	Code
01-50-poles Single	01-50
04-100-poles Double	04-100

Connector Type (insulator body height)	Code
H=1.7 mm	10
H=2.5 mm	20

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

W.E.