


# 152-2


## Pin-Header-Strips with round contact 2.54mm pitch Horizontal SMT Type

### Technical Data :


Insulator Material:	High Temperature Thermoplastic,UL 94V-0
Contact :	φ0.50mm
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	3 Amp
Insulator resistance :	5000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	2.54mm Pitch PCB connector

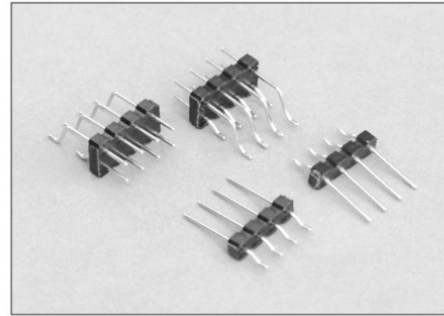

### RoHS Compliant

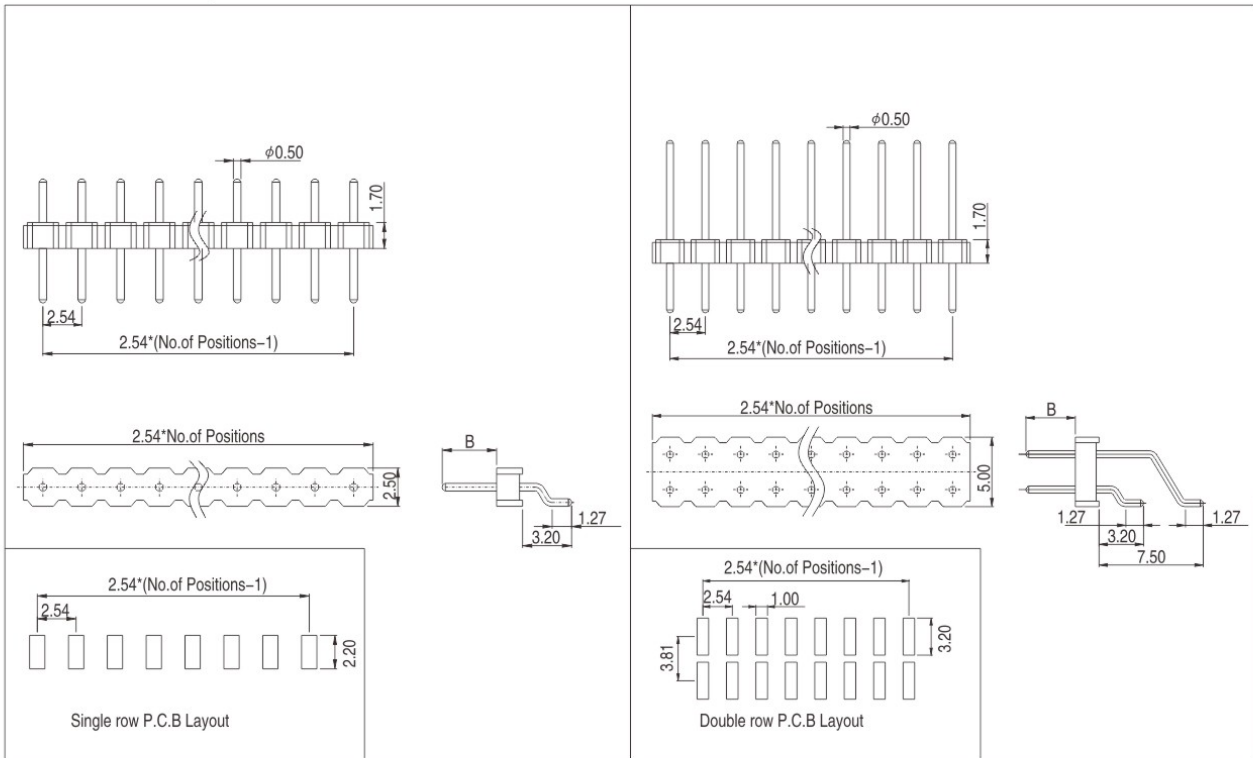

### How to order



Dimensions(mm)	Terminal code
B	
2.1(min)	
3.60	10
11.5(max)	
As request	XXX
FOR Eg.B=4.00, CODE Nr. =4.00	

Layout option	Code
Single row	1
Double row	2

Number of contact	Code
02-25-poles Single	02-25
04-40-poles Double	04-40

Plating option	Code
Gold plated	10
Tin plated	50

W.E.