


# 313

Pin-Header-Strips-Double row for Surface Mount Technic and High-Temperature Body 2.54mm pitch, Vertical Type





## Technical Data :

Insulator Material:	High Temperature Thermoplastic, UL 94V-0
Contact :	0.635x0.635mm.
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	3 Amp
Insulator resistance :	5000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	157,159,160,342,348,622,624,625

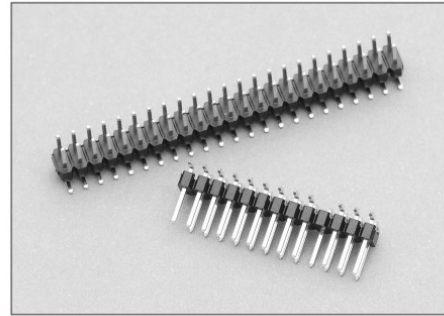

## RoHS Compliant

### 313 serie (Vertical right angle)

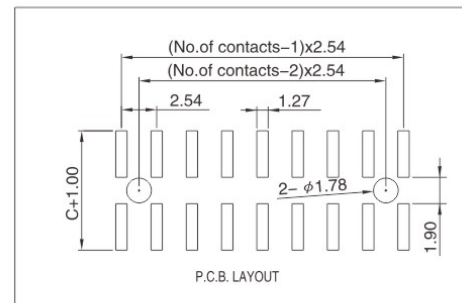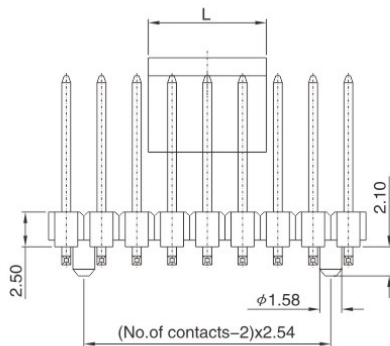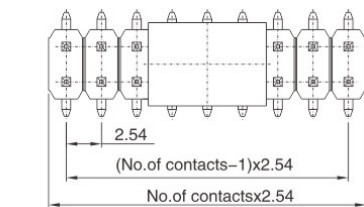

Cap option	Length
PIN < 6	L=5.00mm
PIN = 6	L=7.50mm
PIN > 6	L=8.50mm

## How to order



Terminal code	Dimensions(mm)		
	B	C	D
12	3.50	7.60	3.8
13	4.80	7.60	3.8
14	6.10	7.60	3.8
15	6.90	7.60	3.8
16	9.90	7.60	3.8
17	5.84	7.60	3.8
18	8.13	7.60	3.8
19	10.67	7.60	3.8
XXX	as request		

FOR Eg. B=4.60 C=6.0 D=3.9  
CODE Nr = 4.60/6.0/3.9

Layout	Code
Vertical double row	23
Number of contact	Code
04-60 poles Double	04-60
Pick & Place pad	Code
W / Cap	1
W / O Cap	2

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u" Selective gold plated	610
15u" Selective gold plated	615
20u" Selective gold plated	620
30u" Selective gold plated	630

Packing option	Code
Tube	1
Tape & Reel	2
Location peg option	Code
W / peg	10
W / O peg	00

W.E.