


314


Pin-Header-Strips-Single/Double/Triple/Four row -2.0 mm pitch

Technical Data :


| | |
|---------------------------|---|
| Insulator Material: | High Temperature Thermoplastic, UL 94V-0 |
| Contact : | 0.50x0.50mm. |
| Contact Material: | copper alloy |
| Plating: | Au or Sn over Nickel |
| Current Rating : | 1 Amp |
| Insulator resistance : | 500 Megohms min. |
| Dielectric withstanding : | AC 500V for 1 Minute |
| Operating Temperature: | -40 °C to +105 °C . |
| Max. processing Temp: | 230 °C for 30-60 seconds. 260 °C for 10 seconds. |
| Mates with : | 136,316,618,618-1,620 |

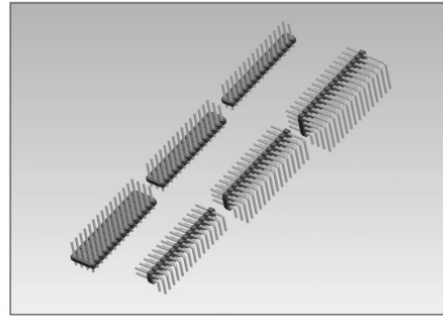

RoHS Compliant

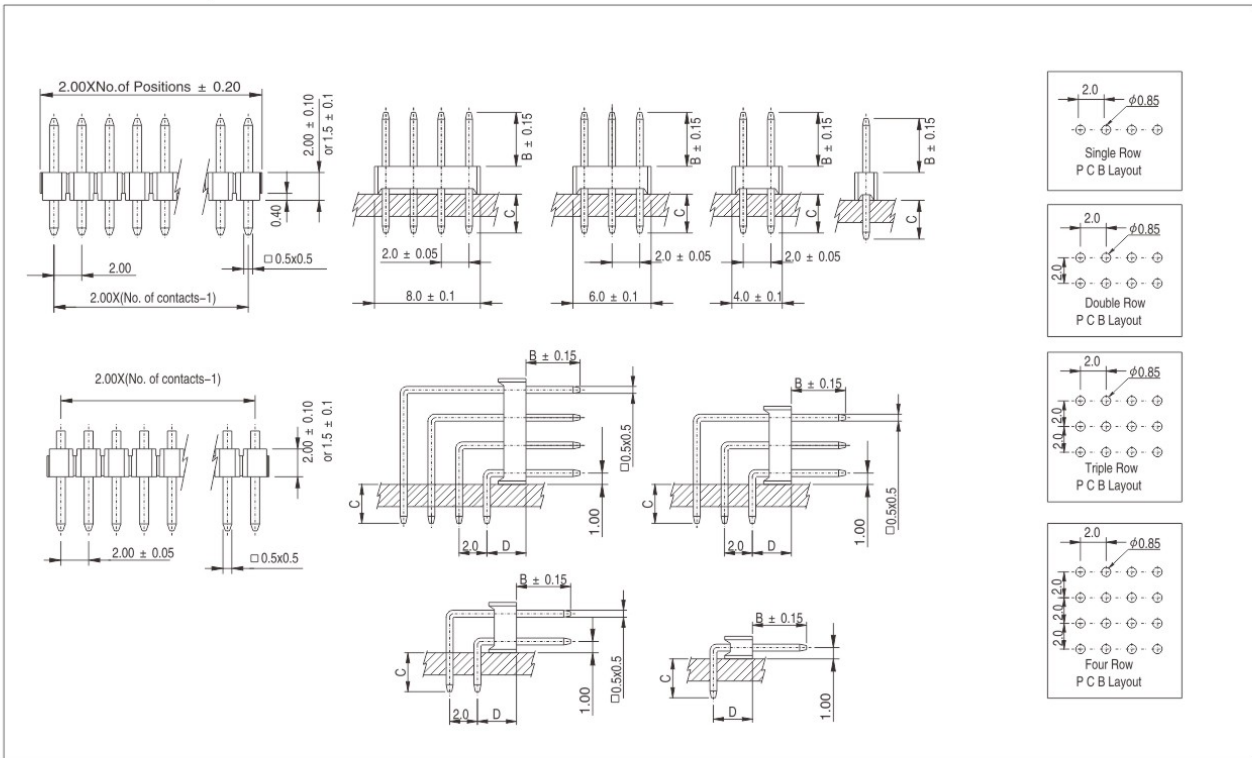

How to order



| Dimensions(mm) | | | | Terminal Version | Code |
|---|-----|-----|-----|------------------|------|
| A | B | C | D | | |
| 8.7 | 3.9 | 2.8 | | Single row 180 ° | 10 |
| 8.7 | 3.9 | 2.8 | | Double row 180 ° | 20 |
| 8.7 | 3.9 | 2.8 | | Triple row 180 ° | 30 |
| 8.7 | 3.9 | 2.8 | | Four row 180 ° | 40 |
| | 3.9 | 2.8 | 2.9 | Single row R.A. | 11 |
| | 3.9 | 2.8 | 2.9 | Double row R.A. | 21 |
| | 3.9 | 2.8 | 2.9 | Triple row R.A. | 31 |
| | 3.9 | 2.8 | 2.9 | Four row R.A. | 41 |
| As request | | | | XXX/XXX | |
| FOR Eg. B=3.20,C=2.46,D=3.2 Single row 90 ° | | | | | |
| CODE Nr. = 3.20/2.46/3.2/11 | | | | | |

| Number of contact | | Code |
|-------------------|--------|--------|
| 40-poles | Single | 02-040 |
| 80-poles | Double | 04-080 |
| 120-poles | Triple | 06-120 |
| 160-poles | Four | 08-160 |

| Profile | Code |
|---|------|
| Thickness of insulator : 1.5 | 1 |
| Thickness of insulator : 2.0 (1&2 Row Only) | 2 |

| Plating option | Code |
|-----------------------------|------|
| Full gold flash plated | 10 |
| Tin plated | 50 |
| Selective gold flash plated | 60 |
| 10u*Selective gold plated | 610 |
| 15u*Selective gold plated | 615 |
| 20u*Selective gold plated | 620 |
| 30u*Selective gold plated | 630 |

W.E.