


314PF

Pin-Header-Press-fit Double Row-2.00mm Pitch


Technical Data :

Insulator Material:	High Temperature Thermoplastic, UL 94V-0
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	1 Amp
Insulator resistance :	500 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.

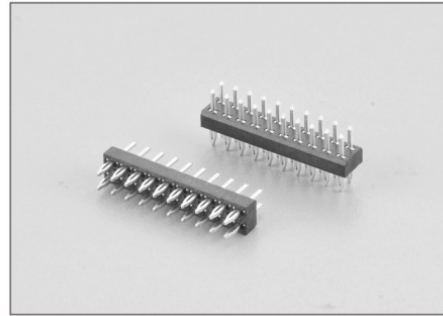


Mates with :

RoHS Compliant

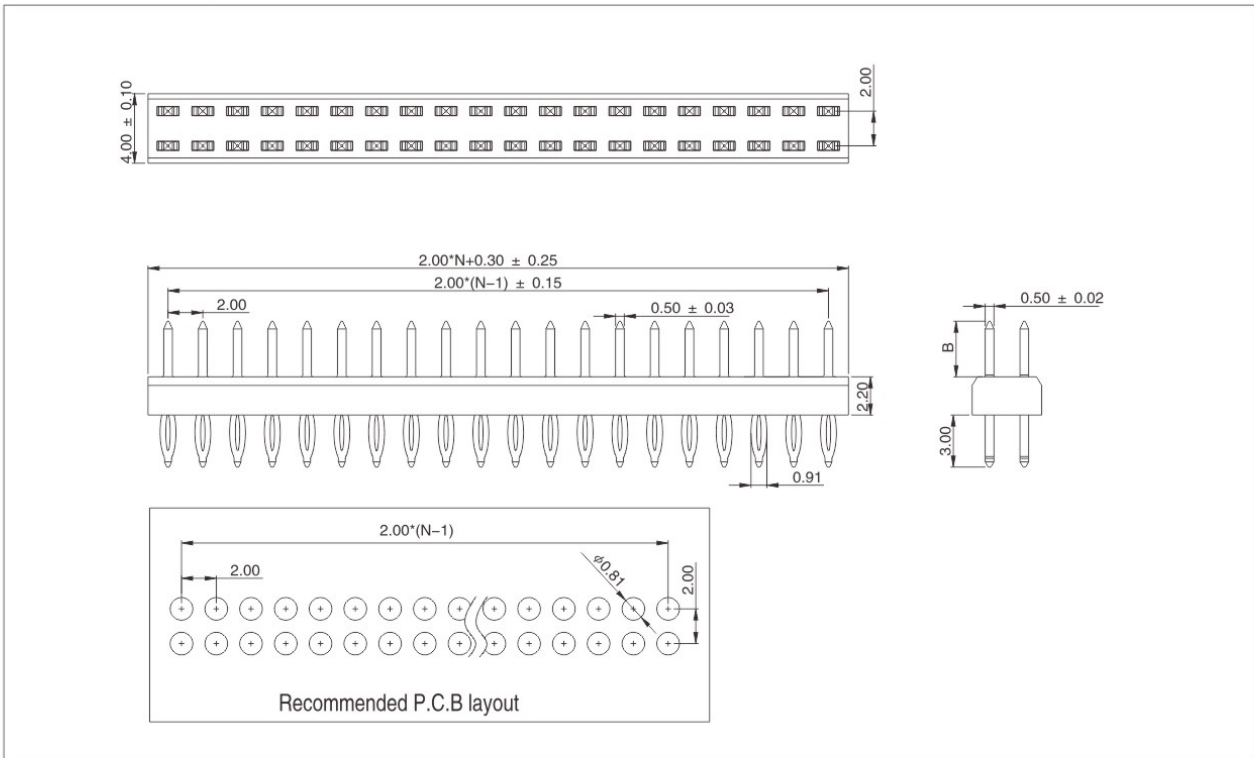

How to order



Number of contact	Code
04-80 Double	004-080

Terminal code	Dimensions(mm)
	B
1A	8.20
1B	3.20
1C	1.90
1D	1.65

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u" Selective gold plated	610
15u" Selective gold plated	615
20u" Selective gold plated	620
30u" Selective gold plated	630

W.E.