


595

1.0mm SMD Box Header


Technical Data :

Insulator Material:	High Temperature Thermoplastic, UL 94V-0.
Contact :	0.30x0.30mm
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	1 Amp
Insulator resistance :	500 Megohms min
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40° C to +105° C.
Max. processing Temp:	230° C for 30-60 seconds. 260° C for 10 seconds.


Mates with : 597

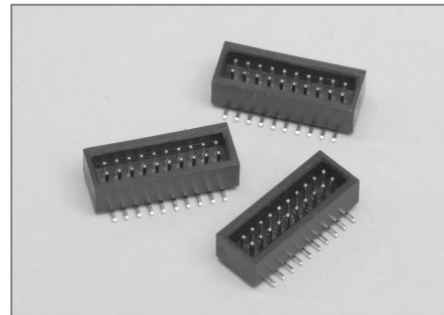

RoHS Compliant

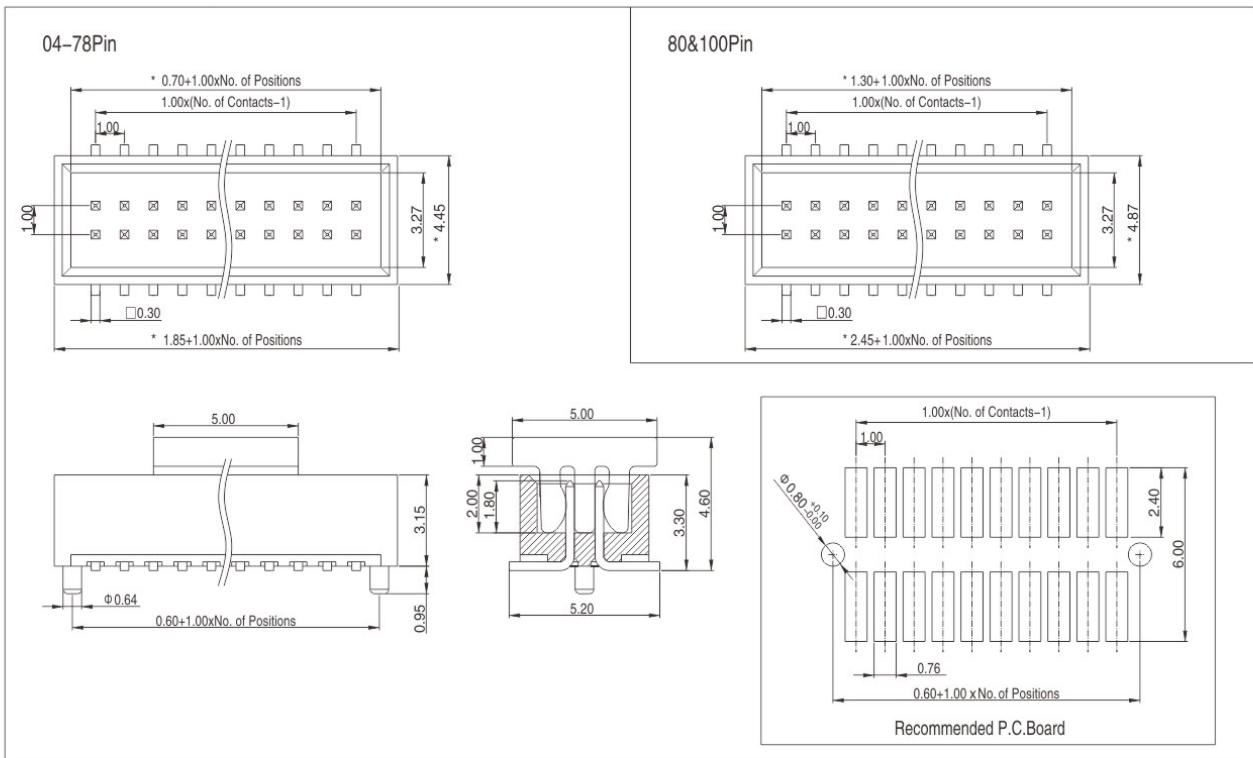

How to order



Nr. of Contact	Code
04 To 100 Contacts	04-100

Connector Type	Code
Profile : 3.30	10

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u" Selective gold plated	610
15u" Selective gold plated	615
20u" Selective gold plated	620
30u" Selective gold plated	630

Pick & Place Pad	Code
W/ Cap	1
W/O Cap	2

Packing option	Code
Tube	1
Tape & Reel	2

Location peg	Code
W/ Location peg	10
W/O Location peg	00

W.E.