


601-1


Pin header strip 1.27mm X 2.54 pitch SMT Type

Technical Data :

Insulator Material:	High Temperature Thermoplastic,UL 94V-0.
Contact :	0.46x0.46mm
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	1 Amp
Insulator resistance :	500 Megohms min
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	317,377,603,604

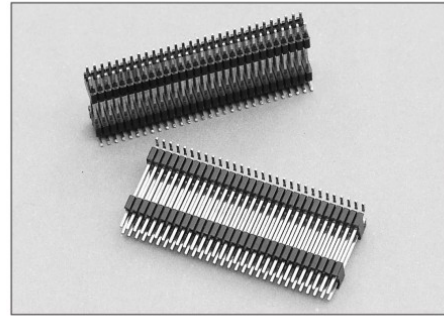

RoHS Compliant

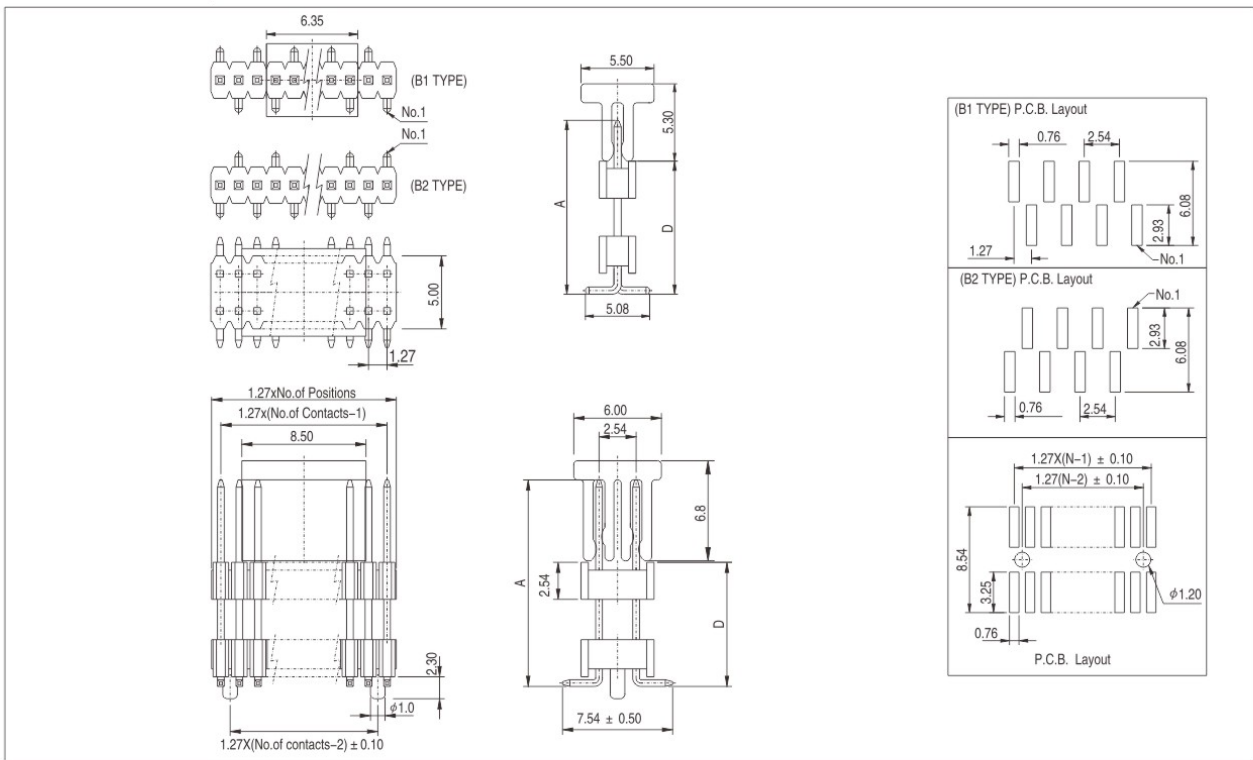

How to order



Nr. of Contact	Code
Single Max.50 contacts	002-050
Double Max.100 contacts	004-100

Nr. of Row	Code
Single Row B1 Type	1
Single Row B2 Type	2
Double Row	3

Dimensions*A"	Code	Dimensions*A"	Code
7.30	10	12.83	24
8.38	20	13.46	25
9.78	21	14.86	26
11.05	22	15.62	27
12.45	23		
as request For Eg. A=10.2 Code Nr.=10.2			

Stacker height "D"	Code
Stacker height	xxx
For Eg. 5.08mm	5.08
For Eg. 6.35mm	6.35

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

Pick & Place Pad	Code
W/ CAP	1
W/O CAP	2

Packing option	Code
PVC Tube	1
Tape & Reel	2

Location Peg	Code
W/ Peg	10
W/O Peg	00
For Double row only	

W.E.