


601


Pin header strip 1.27mm pitch SMT Type

Technical Data :

Insulator Material:	High Temperature Thermoplastic,UL 94V-0.
Contact :	0.46x0.46mm
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	1 Amp
Insulator resistance :	500 Megohms min
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	317,377,603,604

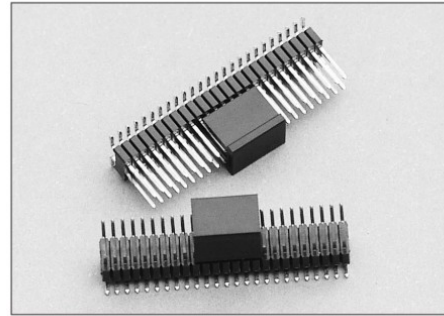

RoHS Compliant

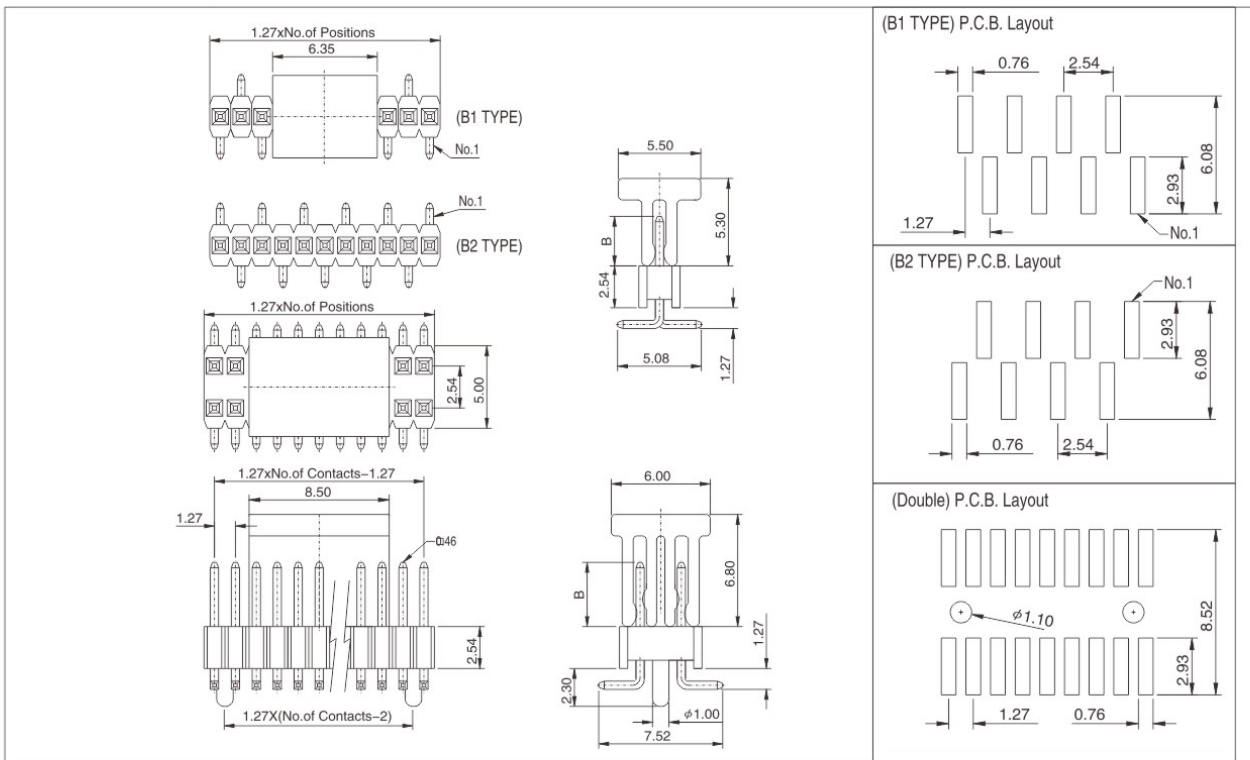

How to order



Nr. of Contact	Code	Dimensions"B"	Code	Dimensions"B"	Code	Plating option	Code	Pick & Place Pad	Code
Single Row Max. 40 contacts	002-040	2.80	10	5.21	61	Full gold flash plated	10	W/ CAP	1
Double Row Max. 100 contacts	004-100	6.00	20	7.24	62	Tin plated	50	W/O CAP	2
		5.84	30	8.51	63	Selective gold flash plated	60		
		2.54	40	9.91	64	10u"Selective gold plated	610		
		3.18	50	10.29	65	15u"Selective gold plated	615		
		4.83	60	10.92	66	20u"Selective gold plated	620		
		as request For Eg. B=2.9 Code Nr.=2.9				30u"Selective gold plated	630		

Nr. of Row	Code
Single Row B1	1
Single Row B2	2
Double Row	3

Packing option	Code
PVC Tube	1
Tapl & Reel	2

Location Peg	Code
W/ Peg	10
W/O Peg	00

For Double row only

W.E.