


# 607-1

Pin header strip 1.27mm x1.27mm pitch

## Technical Data :





Insulator Material: High Temperature Thermoplastic,UL 94V-0.  
 Contact : 0.40x0.40mm  
 Contact Material: copper alloy  
 Plating: Au or Sn over Nickel  
 Current Rating : 1 Amp  
 Insulator resistance : 500 Megohms min  
 Dielectric withstanding : AC 500V for 1 Minute  
 Operating Temperature: -40 °C to +105 °C .  
 Max. processing Temp: 230 °C for 30-60 seconds.  
 260 °C for 10 seconds.

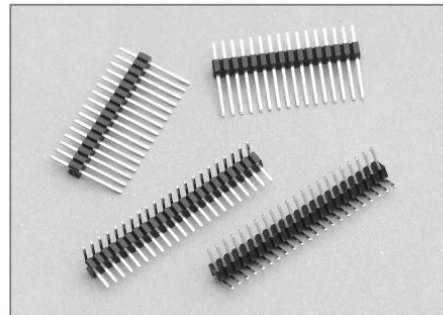





Mates with : 606

## RoHS Compliant

180°



90°



## How to order



Nr. of Contact	Code	Connector Type	Code	Dimensions FOR 180°		Code	Dimensions FOR 90°			Code	Plating option	Code
Single Row Max. 50 contacts	02-50	Dip Type 180°	10	B	C		B	C	D		Full gold flash plated	10
Profile: HxW	Code	Dip Type 90°	11	2.7	2.29	10	2.7	2.29	1.50	10	Tin plated	50
1.0*2.1	A			3.05	2.29	20	3.05	2.29	1.50	20	Selective gold flash plated	60
1.5*2.1	B			1.91	2.29	30	1.91	2.29	2.20	30	10u"Selective gold plated	610
1.7*2.1	C			1.65	2.29	40	1.65	2.29	2.20	40	15u"Selective gold plated	615
2.5*2.1	D			as request	xx/xx		as request	xx/xx/xx			20u"Selective gold plated	620
1.0*2.5	E			For Eg. B=2.05 C=2.6			For Eg. B=2.8 C=2.5 D=2.3				30u"Selective gold plated	630
1.7*2.5	F			Code Nr. =2.05/2.6			Code Nr. =2.8/2.5/2.3					
2.5*2.5	G											
contact: 0.4x0.4												

W.E.