


608


Pin header strips 1.27mm pitch Type 1.27mm X 1.27mm

Technical Data :


| | |
|---------------------------|---|
| Insulator Material: | High Temperature Thermoplastic, UL 94V-0. |
| Contact : | 0.40x0.40mm |
| Contact Material: | copper alloy |
| Plating: | Au or Sn over Nickel |
| Current Rating : | 1 Amp |
| Insulator resistance : | 500 Megohms min |
| Dielectric withstanding : | AC 500V for 1 Minute |
| Operating Temperature: | -40° C to +105° C. |
| Max. processing Temp: | 230° C for 30-60 seconds. 260° C for 10 seconds. |
| Mates with : | 605,606,606-1,606-2,613 |

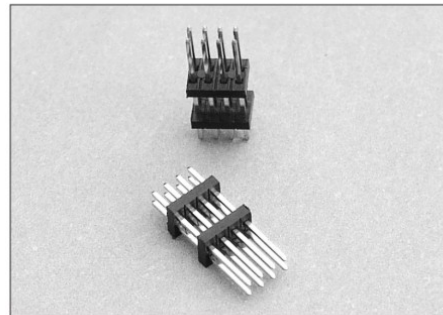

RoHS Compliant

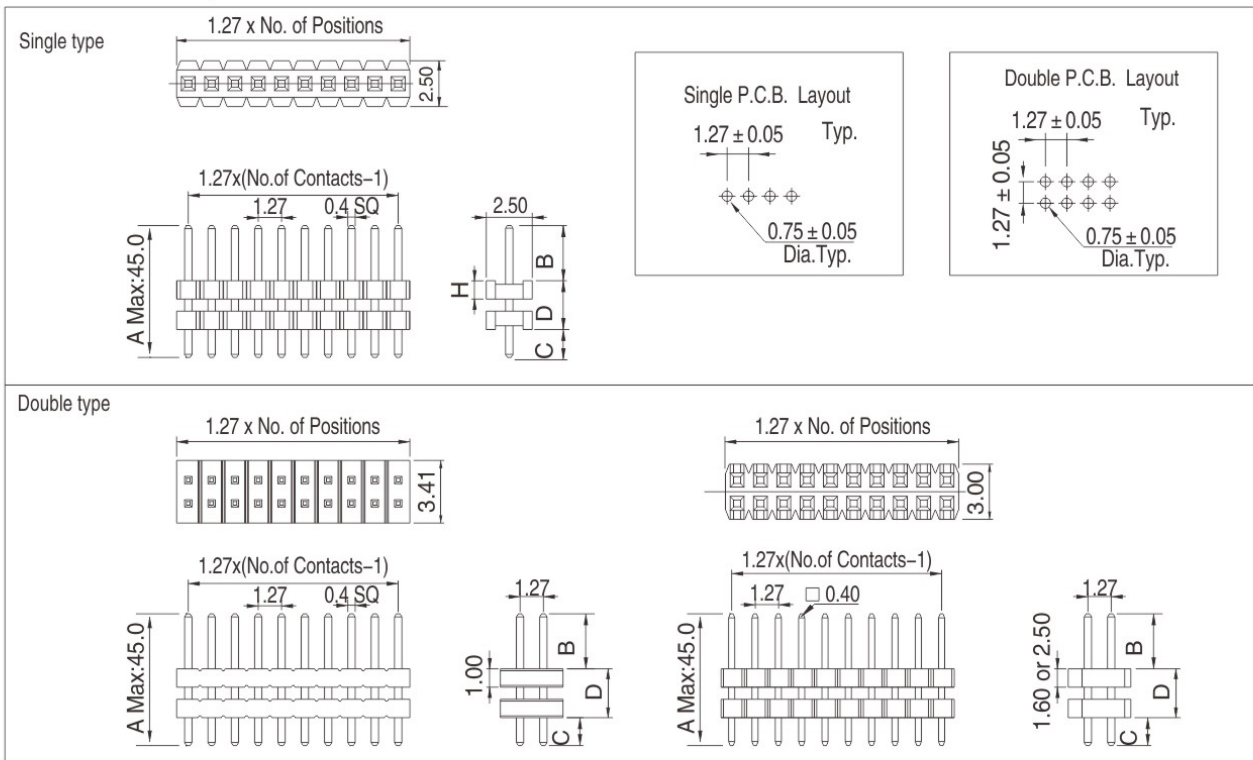

How to order



| Number of contact | Code |
|--------------------------|---------|
| Max. single 50 contacts | 002-050 |
| Max. Double 100 contacts | 004-100 |

| Connector Type | Code |
|--------------------------------|------|
| H of Insulator: 1.0 Double Row | 1 |
| H of Insulator: 1.6 Double Row | 2 |
| H of Insulator: 2.5 Double Row | 3 |
| H of Insulator: 1.0 Single Row | 4 |
| H of Insulator: 1.7 Single Row | 5 |
| H of Insulator: 2.5 Single Row | 6 |

| Dimensions | | Code |
|-----------------------|------|---------|
| B | C | |
| 3.00 | 2.85 | 10 |
| 1.65 | 1.14 | 20 |
| 1.65 | 1.91 | 30 |
| 1.65 | 2.29 | 40 |
| as request | | xxx/xxx |
| For Eg. B=3.0, C=2.85 | | |
| Code Nr.=3.00/2.85 | | |

| Stacker Height D | Code |
|------------------|------|
| Stacker Height | xxx |
| For Eg. 6.35mm | 6.35 |
| For Eg. 2.35mm | 2.35 |

| Plating option | Code |
|-----------------------------|------|
| Full gold flash plated | 10 |
| Tin plated | 50 |
| Selective gold flash plated | 60 |
| 10u" Selective gold plated | 610 |
| 15u" Selective gold plated | 615 |
| 20u" Selective gold plated | 620 |
| 30u" Selective gold plated | 630 |

W.E.