


611-D

1.27mm BOARD STACKER


Technical Data :

Insulator Material:	High Temperature Thermoplastic, UL 94V-0.
Contact :	0.40x0.40mm
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	1 Amp
Insulator resistance :	500 Megohms min
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	605,606

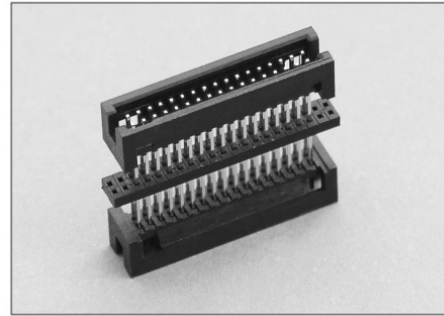


RoHS Compliant

Type A

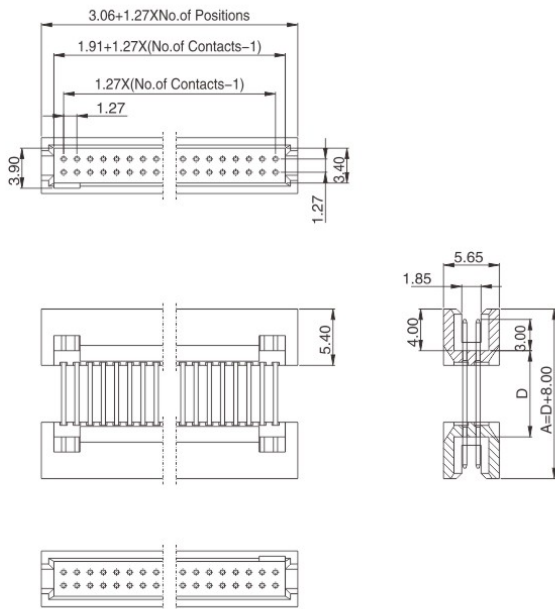

Type B

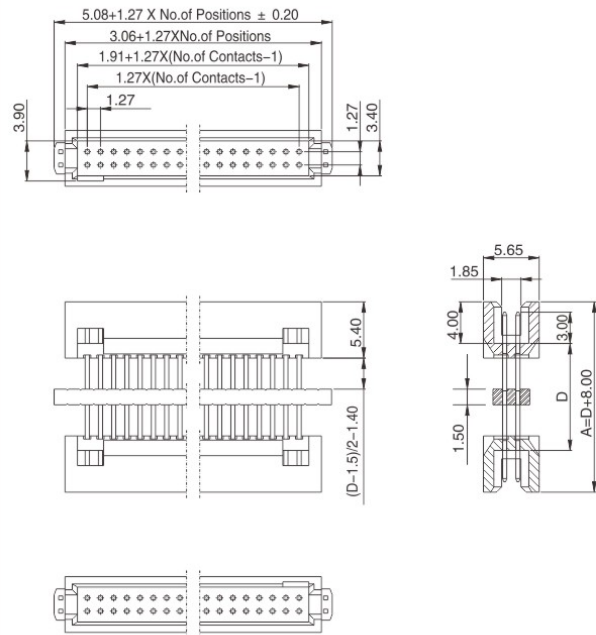

How to order



Nr. of Contacts
10 to 100 Contacts

Connector Type	Code
Type A	1
Type B	2

Dimension		
A	D	Code
22.50	14.50	10
As request		XX
For Eg. A=24 D=16		
Code Nr.=24/16		

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u" Selective gold plated	610
15u" Selective gold plated	615
20u" Selective gold plated	620
30u" Selective gold plated	630

W.E.