


612


Pin Header 1.27mm x1.27mm Board Spacer Box Type

Technical Data :


Insulator Material:	High Temperature Thermoplastic,UL 94V-0.
Contact :	0.40x0.40mm
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	1 Amp
Insulator resistance :	500 Megohms min
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	605,606 Female Header

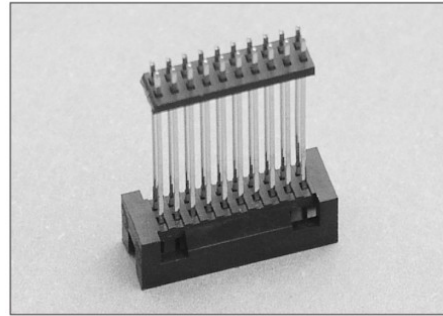

RoHS Compliant

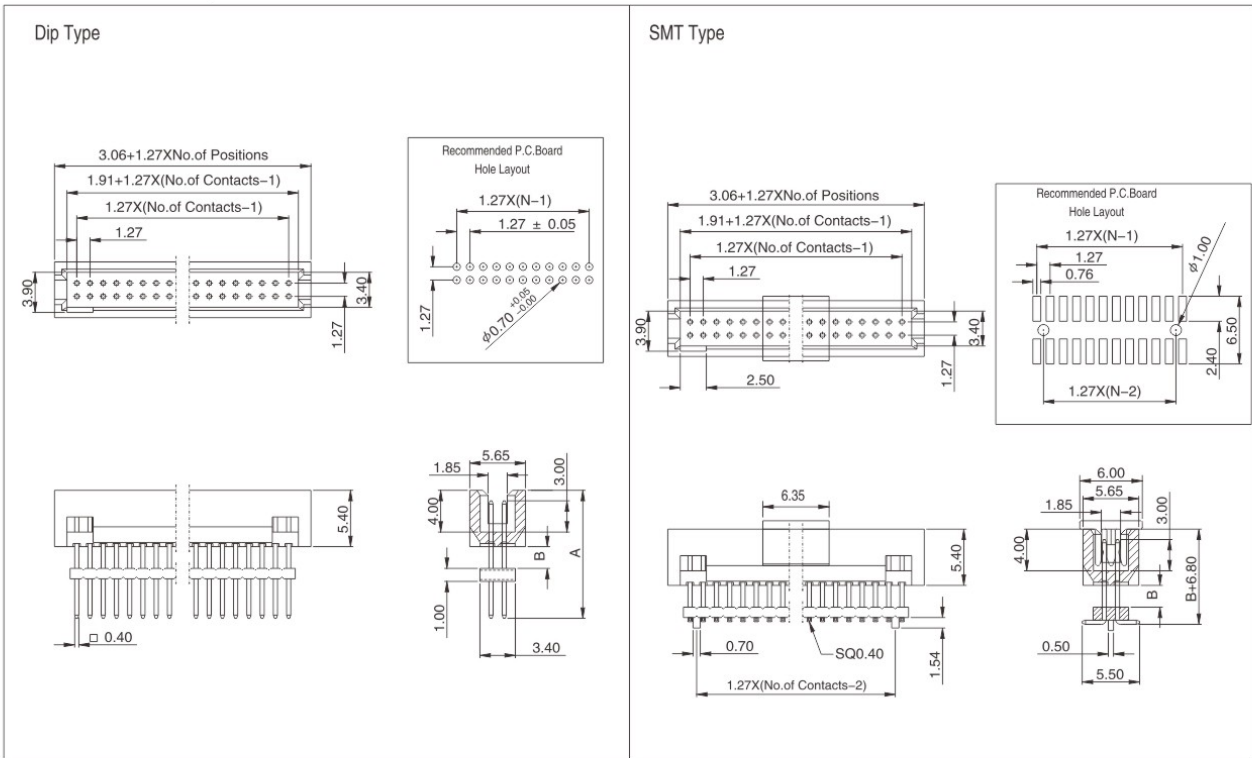

How to order



Nr. of Contact	Code
010-100	010-100

Connector Type	Code
Dip Type	1
SMT Type	2

Dimensions(Dip)		Code
A	B	
9.2	1.0	10
10.5	1.0	20
as request		XX
Eg.A=15.0 B=2.4		Code Nr.=15.0/2.4

Dimensions(SMT)	Code
B	
1.0	10
1.5	20
as request	XX
Eg.B=2.4	Code Nr.=2.4

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

Location Peg(For SMT Type)	Code
W/ Locatoin Peg	10
W/O Locatoin Peg	00

Cap option	Code
W/ Cap	1
W/O Cap	2
For SMT Type only	

Packing Option	Code
Tube	1
Tape & Reel	2

W.E.