


615-2

Pin-Header-Strips-Single/Double row-2.00mm Right angle


Technical Data :

Insulator Material:	High Temperature Thermoplastic,UL 94V-0
Contact :	0.50x0.50mm.
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	3 Amp
Insulator resistance :	500 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	136,316,618,618-1,620

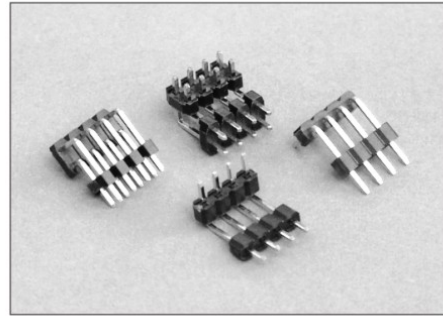


RoHS Compliant


Single Row

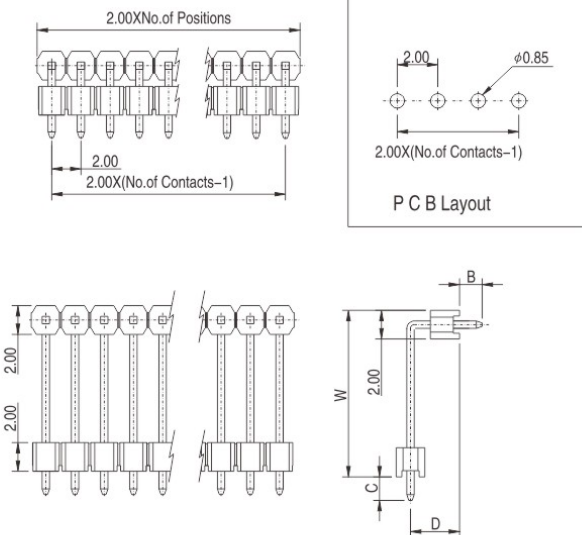

Double Row

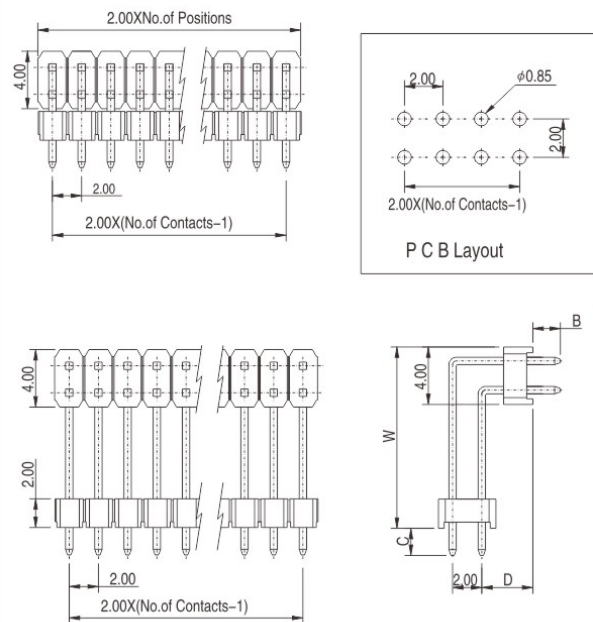

How to order



Terminal code	Dimensions(mm)			
	B	C	D	W
12	4.00	3.30	3.90	8.60
13	4.20	3.30	3.90	9.70
XX/XX/XX	as request			
FOR Eg. B=4.40,C=3.1,D=5.8,W=12.3				
CODE Nr.=4.4/3.1/5.8/12.3				

Number of contact	Code
02-40 Single	02-40
04-80 Double	04-80
Number of Row	Code
Single Row	1
Double Row	2

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

W.E.