

# 921


## 5.00mm Pitch Mini-Power Terminal, Vertical Type

### Technical Data :

Insulator Material:	High Temperature Thermoplastic, LCP, UL 94V-0
Contact Material:	stamped and formed, Copper Alloy
Clip Material:	stamped and formed, Copper Alloy
Contact Plating:	Au or Tin over Nickel
Clip Plating:	Matt Sn over Nickel
Current Rating :	24.7A
Voltage Rating:	600VAC/848VDC
Operating Temperature :	-55 °C to +105 °C With Tin -55 °C to +125 °C With Gold
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	920



### RoHS Compliant

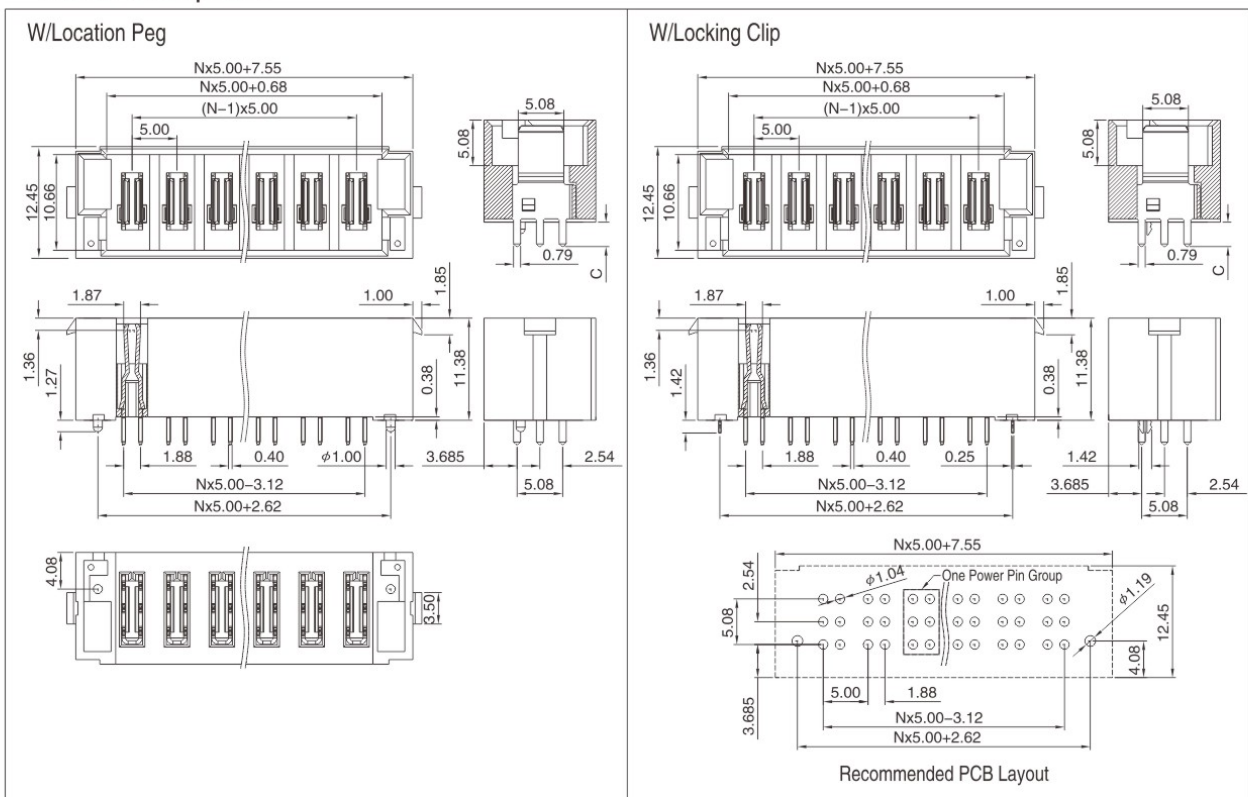

### How to order



Nr. of contact	Code
02	02
03	03
04	04
06	06
08	08

Terminal type	Code
Dimensions(mm)	
C	10
2.72	11
3.52	12
4.32	

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u* Selective gold plated	610

Location option	Code
W/Location Peg	10
W/Locking Clip	20

Pick&Place Cap	Code
W/O Cap	2

Packing option	Code
Tube	1
Tray	3

W.E.