


136


Female header 2.0mm pitch H6.35 Right angle B Type

Technical Data :


Insulator Material:	High Temperature Thermoplastic, UL 94V-0
Contact :	stamped and formed, Phosphor Bronze
Plating:	Au or Sn over Nickle
Current Rating :	1 Amp
Contact resistance:	20 milliohms Max.
Insulator resistance :	1000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute.
Operating Temperature:	-55° C to +105° C.
Max. processing Temp:	230° C for 30-60 seconds. 260° C for 10 seconds.
Mates with :	Pitch 2.0mm, □0.50mm male header

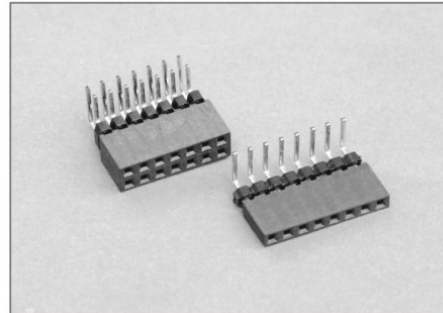

RoHS Compliant

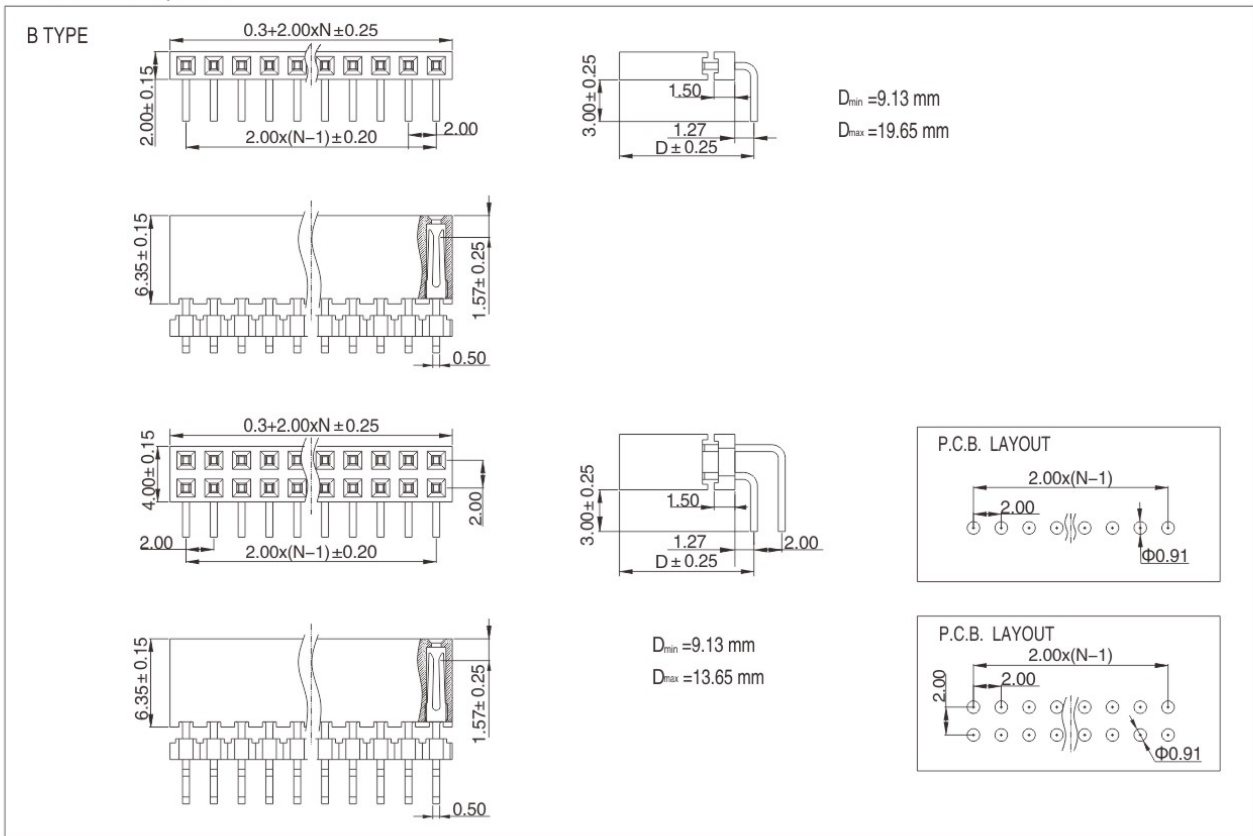

How to order



Number of contact	Code
single row	02-40
double row	04-80

Nr. of Row	Code
single row	10
double row	20

Dimensions "D"	Code
As request For Eg. D=9.63 Code Nr.= 9.63	XX

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

Connector Type	Code
Right Angle B Type	21

W.E.