


154


2.54mmX2.54mm Box Type Dual Row

Technical Data :

Insulator Material:	High Temperature Thermoplastic,UL 94V-0
Contact :	0.635x0.635mm
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	3 Amp
Insulator resistance :	5000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	157,159,160,165,342,348,622,624

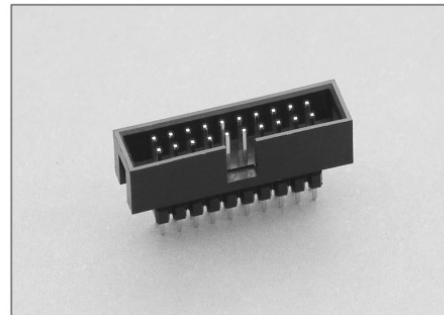

RoHS Compliant

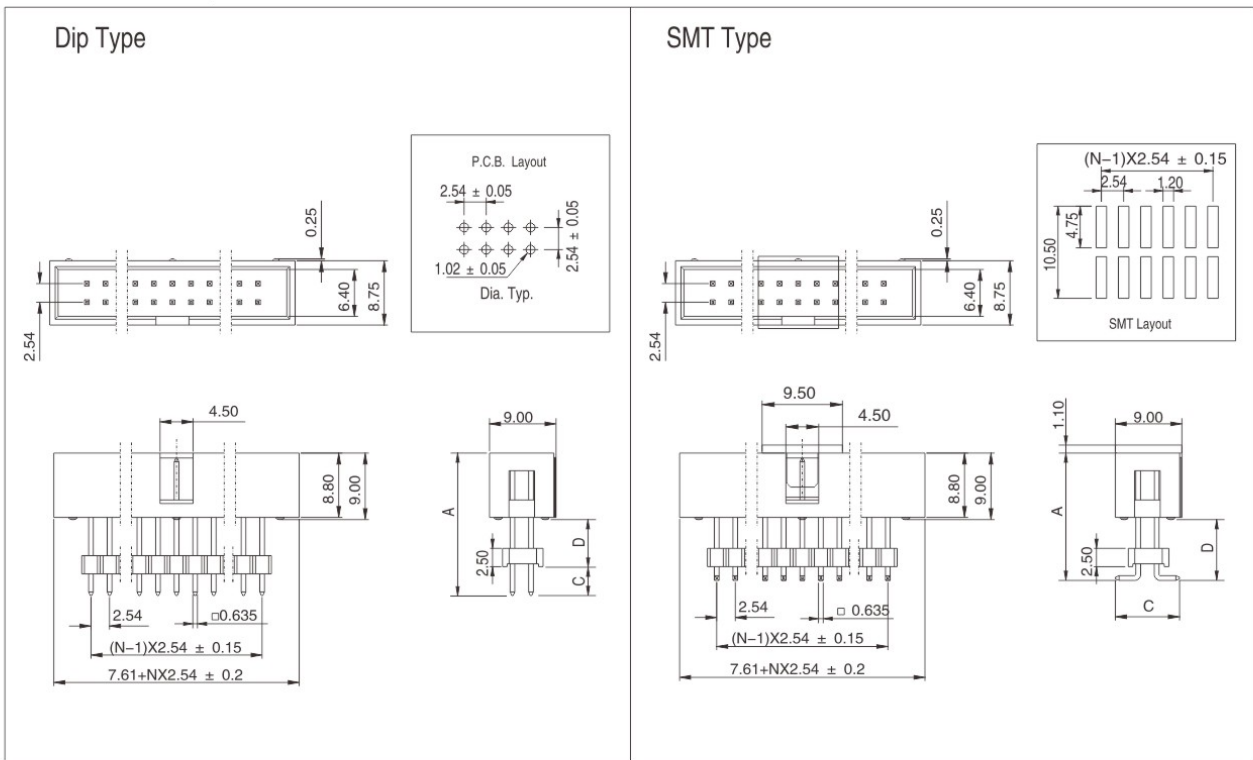

How to order

1	5	4	—			—				—			—			—		
Serie-Nr.		Terminal code		Nr. of contact		Connector type		Plating option		Cap		Packing						

Dimensions(mm)		Dip	SMT	code
A	D	C		
19.80	7.50	3.30	9.00	10
21.60	9.20	3.30	9.00	20
AS request		XXX/XXX/XX		
FOR Eg. A=33.6 D=21.2 C=10.00				
Code Nr.=33.6/21.2/10.00				

Number of contact	Code
06-64	06-64

Connector type	Code
Dip solder straight	1
SMT Type	3

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
15u"Selective gold plated	615
20u"Selective gold plated	620
30u"Selective gold plated	630

Pick & Place pad	Code
W / Cap	1
W / O Cap	2
For SMT Type only	
Packing option	
Tube For SMT Type	1
T & R For SMT Type	2
Tray For Dip Type	3

W.E.