


660D


Male On Board Type 1.27 Pitch(Mini-Match connector)

Technical data :


Insulator:	Thermoplastic Polyester,PBT rated UL94-V0
Color Insulator:	Red
Contact:	Phosphor bronze
Plating :	Tin over nickel
Operating temperature:	-40° C to+105° C
Current rating:	1 Amp
Contact resistance:	20 milliohms Max.
Insulation resistance:	1000m min. at DC 100V
Dielectric withstanding:	AC 500V for 1 minute

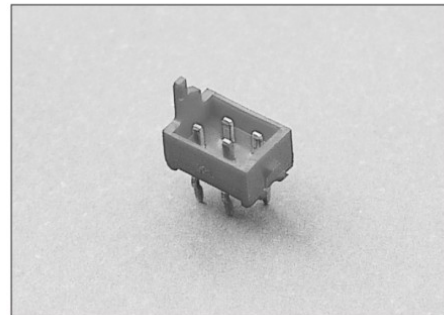

RoHS Compliant

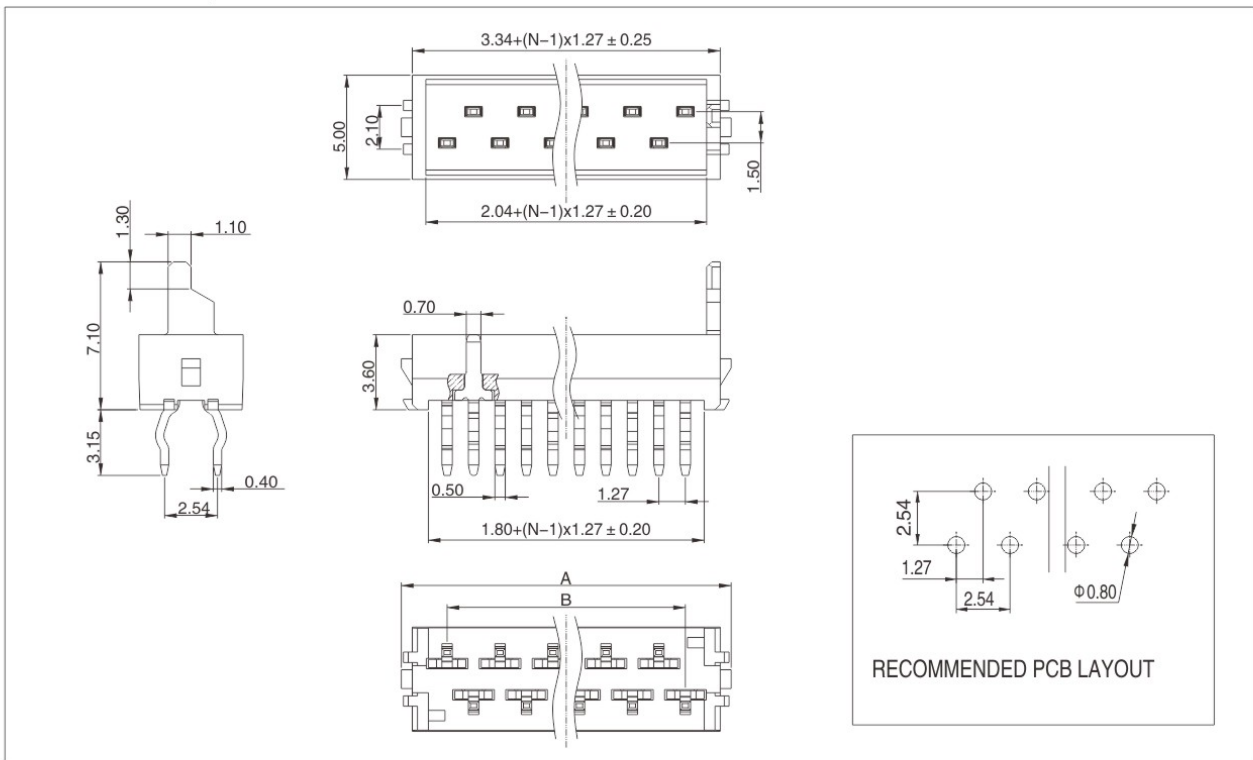

How to order



Nr.Of contact	DIMENSIONS	
	A	B
04	8.2	3.81
06	10.7	6.35
08	13.3	8.89
10	15.8	11.43
12	18.3	13.97
14	20.8	16.51
16	23.4	19.05
18	25.9	21.59
20	28.4	24.13
24	33.60	29.21

Plating option	Code
Full gold flash plated	10
Tin plated	50

Packing Option	Code
Tube	1
Tape&Reel	2

W.E.