


349


2.54mm SOCKET

Technical Data :


Insulator Material:	High Temperature Thermoplastic, UL 94V-0
Contact :	stamped and formed, Phosphor Bronze
Plating:	Au or Sn over Nickel
Current Rating :	3 Amp
Contact resistance:	20 milliohms Max.
Insulator resistance :	1000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute.
Operating Temperature:	-40° C to +105° C.
Max. processing Temp:	230° C for 30-60 seconds. 260° C for 10 seconds.
Mates with :	Pitch 2.54mm, □0.635mm male header

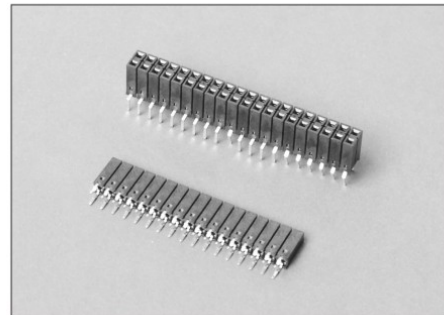

RoHS Compliant

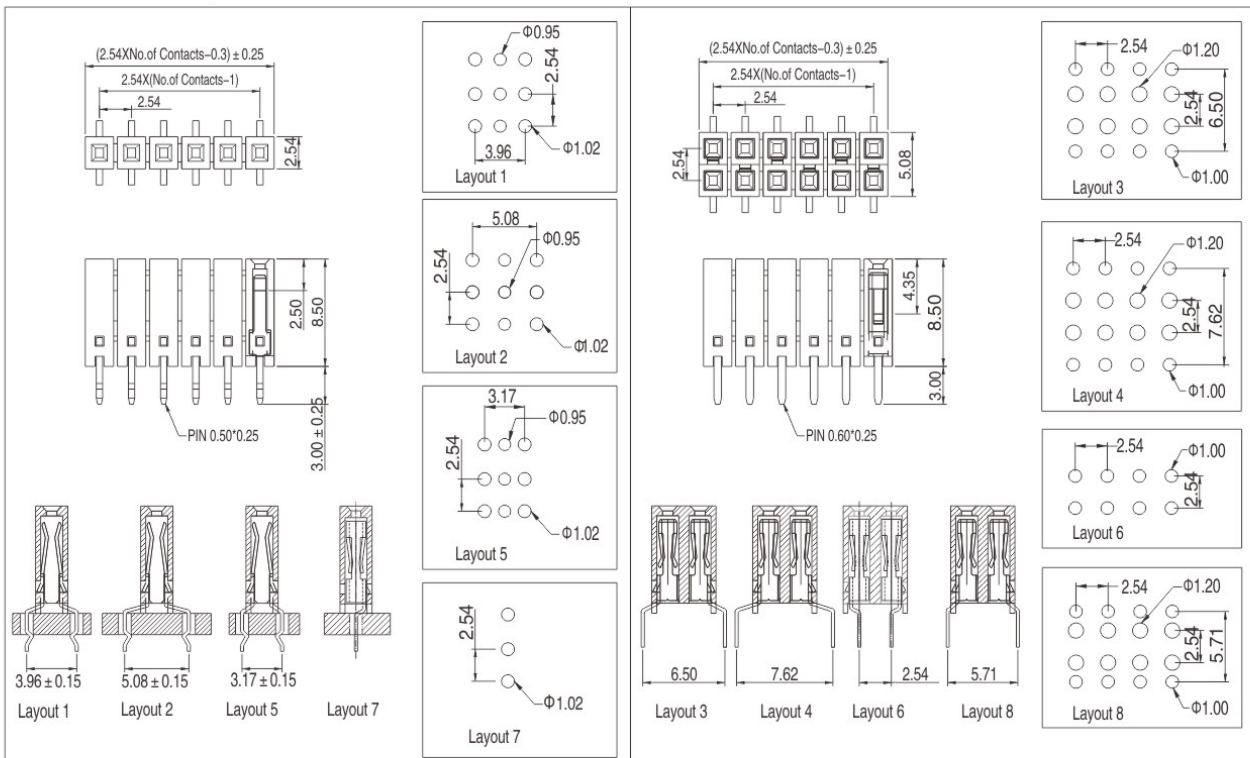

How to order



Number of contact	Code
Single Row 02 to 45 Contacts	02-45
Double Row 04 to 90 Contacts	04-90

Number of Row	Code
Single Row	1
Double Row	2

Dip spacing	Code
Layout 1 - 3.96mm	1
Layout 2 - 5.08mm	2
Layout 3 - 6.50mm	3
Layout 4 - 7.62mm	4
Layout 5 - 3.17mm	5
Layout 6 - 2.54mm	6
Layout 7 - DIP	7
Layout 8 - 5.71mm	8

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u" Selective gold plated	610
15u" Selective gold plated	615
20u" Selective gold plated	620
30u" Selective gold plated	630

Note: Selective high thickness gold plated Code: 610, 615, 620, 630 only for single row layout 1&2&5

W.E.