


# 624


Female Headers Height 7.1 mm & 8.5mm & 8.4mm 2.54mm pitch

## Technical Data :


Insulator Material:	High Temperature Thermoplastic, UL 94V-0
Contact :	stamped and formed, Phosphor Bronze
Plating:	Au or Sn over Nickel
Current Rating :	3 Amp
Contact resistance:	20 milliohms Max.
Insulator resistance :	1000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute.
Operating Temperature:	-40° C to +105° C.
Max. processing Temp:	230° C for 30-60 seconds. 260° C for 10 seconds.
Mates with :	Pitch 2.54mm, □0.635mm male header

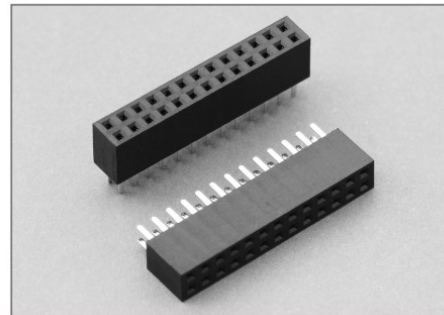

## RoHS Compliant

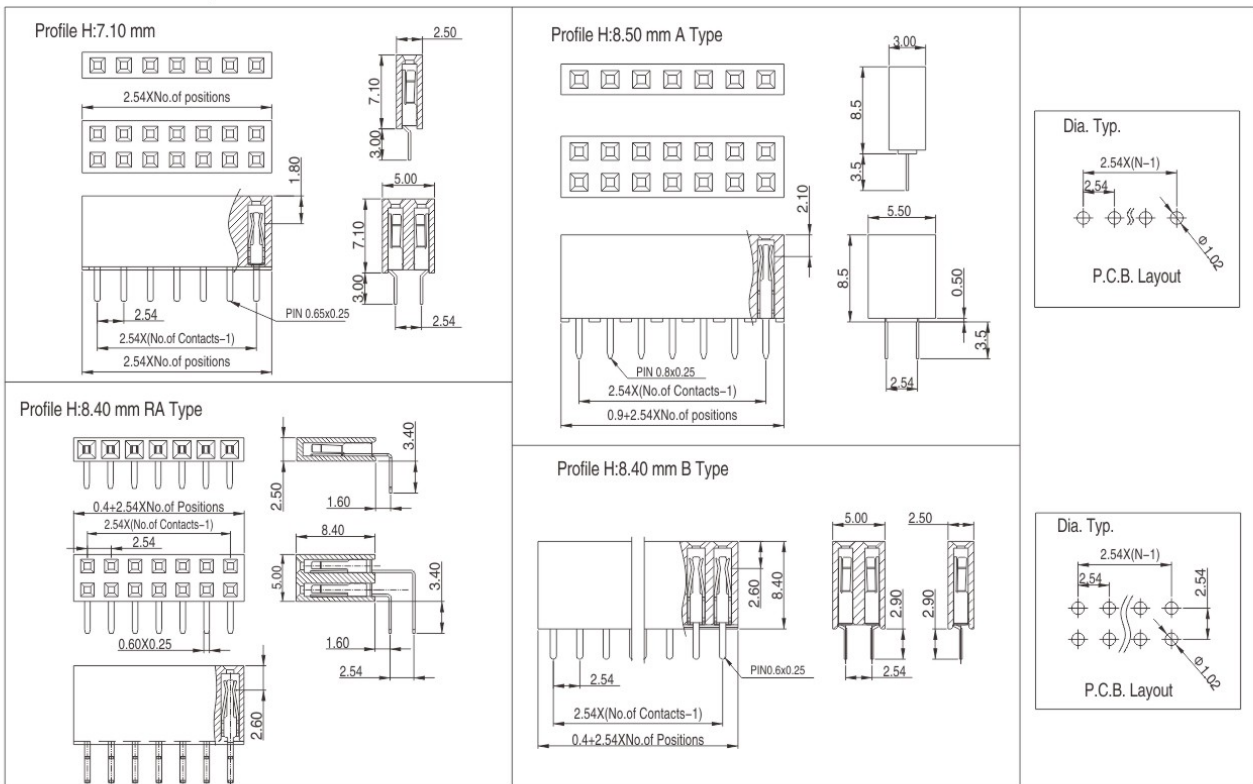

## How to order



Number of contact	Code
1 - single 03 to 40 poles	03-40
2 - double 06 to 60poles	06-80

Number of row	Code
1 - single	1
2 - double	2

Commecotr Type	Code
7.1mm height	10
8.5mm height A Type	20
8.4mm height B Type	30
8.4mm height RA Type	50

Plating option contact	Code
Gold plated	10
Tin plated	50
Selective gold plated	60
10u"Selective gold plated	610
20u"Selective gold plated	620
30u"Selective gold plated	630

W.E.