


626


Economy Female-Headers-2.54mm x 7.87mm pitch side entry type

Technical Data :


Insulator Material:	High Temperature Thermoplastic,UL 94V-0
Contact :	stamped and formed,Phosphor Bronze
Plating:	Au or Sn over Nickel
Current Rating :	3 Amp
Contact resistance:	20 milliohms Max.
Insulator resistance :	1000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute.
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	313-XX-1,353-XX-1,146A,147A

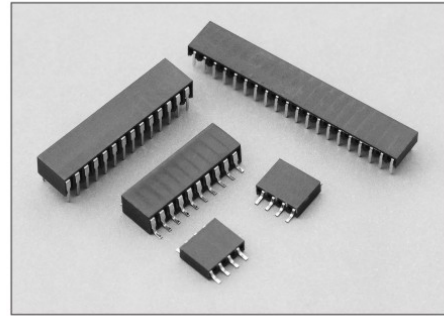

RoHS Compliant

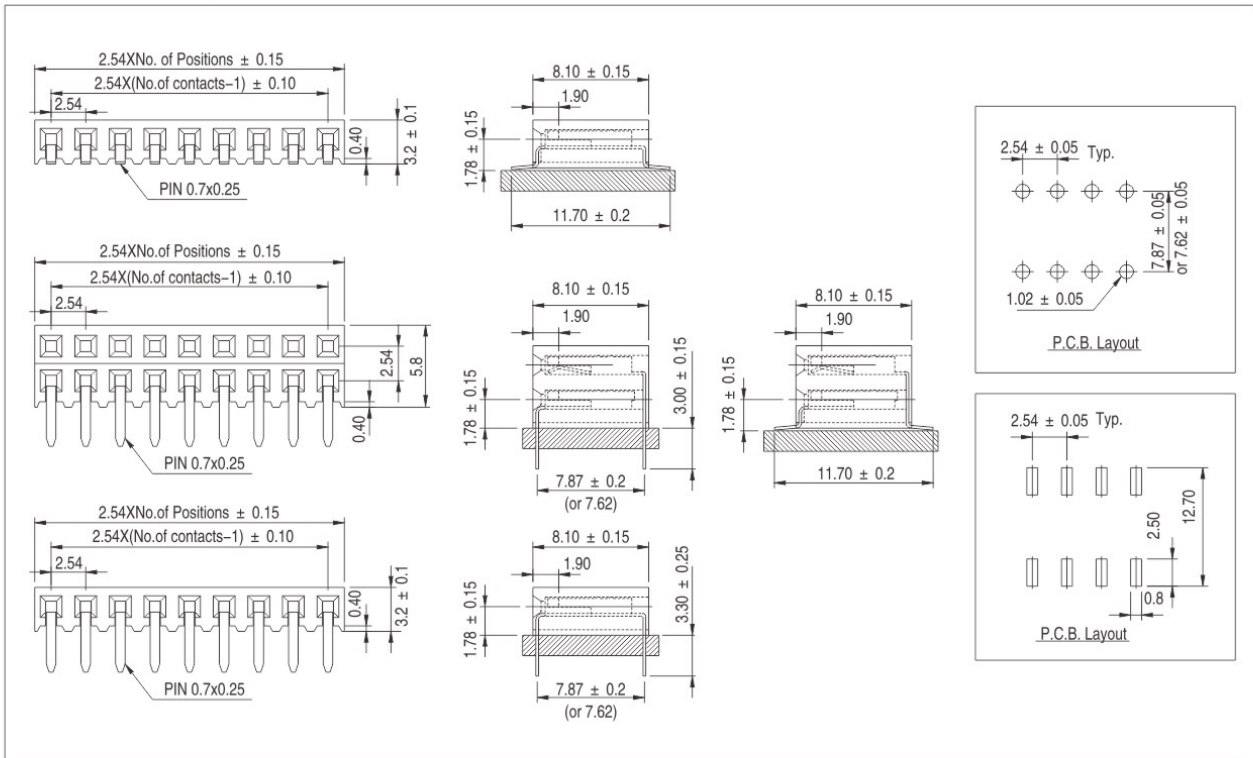

How to order



Number of contact	Code
1 -Single max. 40 poles	02-40
2 -Double max. 80poles	06-80

Connector type	Code
1 Single 7.87mm DIP	10
2 Single 7.62mm DIP	11
3 Double 7.87mm DIP	21
4 Double 7.62mm DIP	22
5 Single SMT type(11.7mm)	31
6 Double SMT type(11.7mm)	32

Plating option	Code
Gold plated	10
Tin plated	50
Selective gold flash plated	60
10u"Selective gold plated	610
20u"Selective gold plated	620
30u"Selective gold plated	630

W.E.