


146PF, 147PF

Pin-Header-Press-Fit-Single row&Double Row-Right Angle -2.54 mm pitch


Technical Data :

Insulator Material:	High Temperature Thermoplastic, UL 94V-0
Contact :	0.635x0.635mm.
Contact Material:	copper alloy
Plating:	Au or Sn over Nickel
Current Rating :	3 Amp
Insulator resistance :	5000 Megohms min.
Dielectric withstanding :	AC 500V for 1 Minute
Operating Temperature:	-40 °C to +105 °C .
Max. processing Temp:	230 °C for 30-60 seconds. 260 °C for 10 seconds.
Mates with :	157,158,159,160,162,342,623,624,625

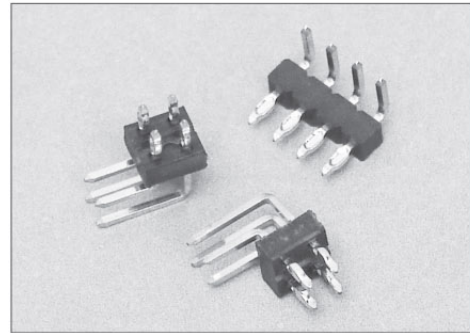


RoHS Compliant

146PF

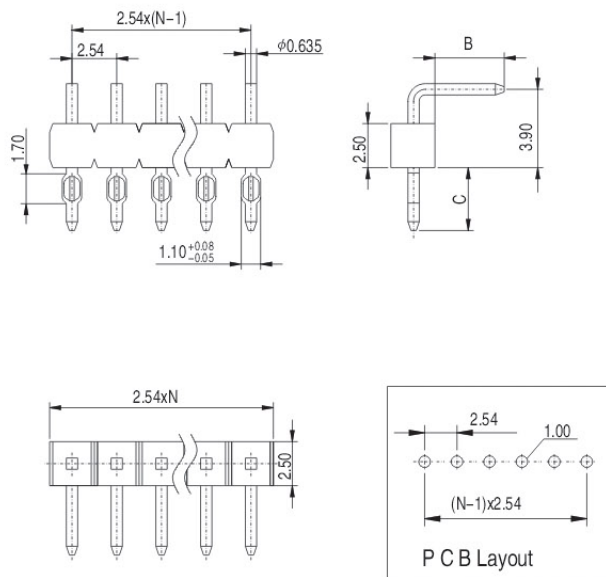

147PF

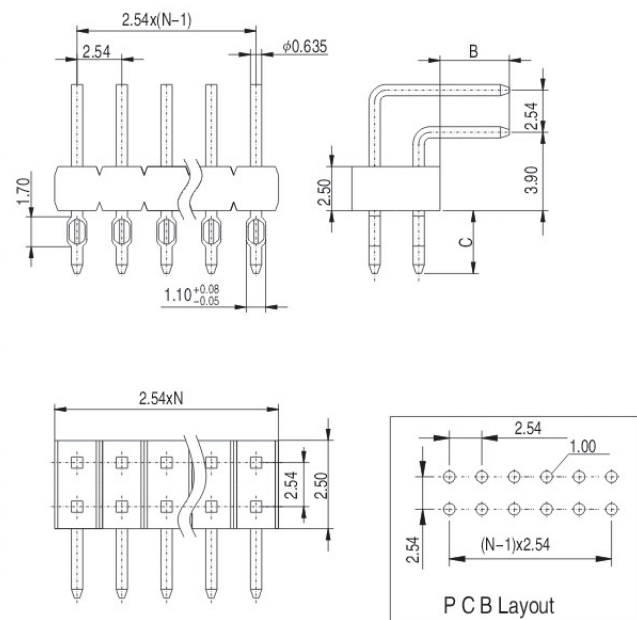

How to order

1	4	6	P	F	-						
1	4	7	P	F	-						
Serie-Nr.		Terminal code				Nt.of contact			Plating option		

Terminal code		Code
B	C	
2.8	3.3	10
5.6	3.3	20
As request		XXXX
For Eg. B=7.0 C=3.0		
Code Nr.=7.0/3.0		

Number of contact	Code
146 Series 01 ~ 40pins	01-40
147 Series 02 ~ 80pins	02-80

Plating option	Code
Full gold flash plated	10
Tin plated	50
Selective gold flash plated	60
10u*Selective gold plated	610
15u*Selective gold plated	615
20u*Selective gold plated	620
30u*Selective gold plated	630

W.E.