


618


Economy Female header 2.0mm pitch SMT Type Height 2.3& 2.8mm

Technical Data :

Insulator Material: High Temperature Thermoplastic,UL 94V-0
Contact : stamped and formed,Phosphor Bronze
Plating: Au or Sn over Nickle
Current Rating : 1 Amp
Contact resistance: 20 milliohms Max.
Insulator resistance : 1000 Megohms min.
Dielectric withstanding : AC 500V for 1 Minute.
Operating Temperature: -40°C to +105°C.
Max. processing Temp: 230°C for 30-60 seconds.
 260°C for 10 seconds.
Mates with : Pitch 2.0mm, □0.50mm male header



RoHS Compliant

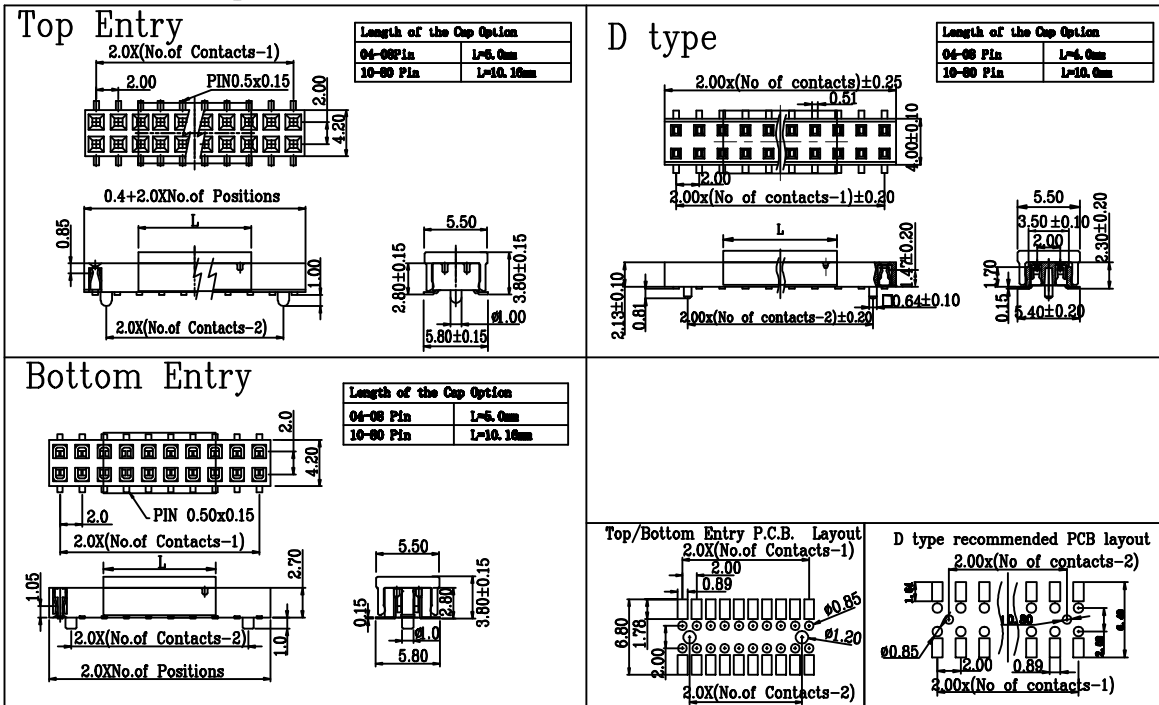

How to order

6 1 8 — — — — —

 Serie-Nr. Nr.of Contact Profile Plating Locating peg Cap Option Packing Option

Number of contact	Code
2.8mm 04 to 80 poles	04-80

Profile	Code
2.8mm Top Entry	1
2.8mm Bottom Entry	2
2.3mm D Type	5

Plating option	Code
Gold plated	10
Tin plated	50
Selective gold plated	60
10u"Selective gold plated	610
20u"Selective gold plated	620
30u"Selective gold plated	630

Plating Code:610,620,630 only for profile:2.8mm Top and Bottom Entry

Pick & Place	Code
W/ Cap	1
W/O Cap	2

Location Peg Option	Code	Note
W/ Location Peg	10	6Pin Min
W/O Location Peg	00	

Packing option	Code
Tube	1
Tape & Reel	2

W.E.