


519

(1.25mm)Crimp Housing and Contact 02 to 15 Contacts

Technical date :

Contact Material : Copper alloy
 Wafer material: 0.35mm round wire pins brass,tin plated.
 Housing: Nylon 66,[UL 94V-0]
 Applicable wires : AWG # 26 to 30
 Current rating : 1A AC, DC
 Voltage Rating : 250V AC Max.
 Temperature Range : -25°C~85°C
 Contact Resistance : 20 Mohm Max
 Insulation Resistance : 100 Mohm min
 Withstand Voltage : 800V AC/minute
 P.C.Board Thickness : 0.8-1.6mm
 Contact resistance: Initial value/10mohm max.
 After environmental testing/30mohm max.

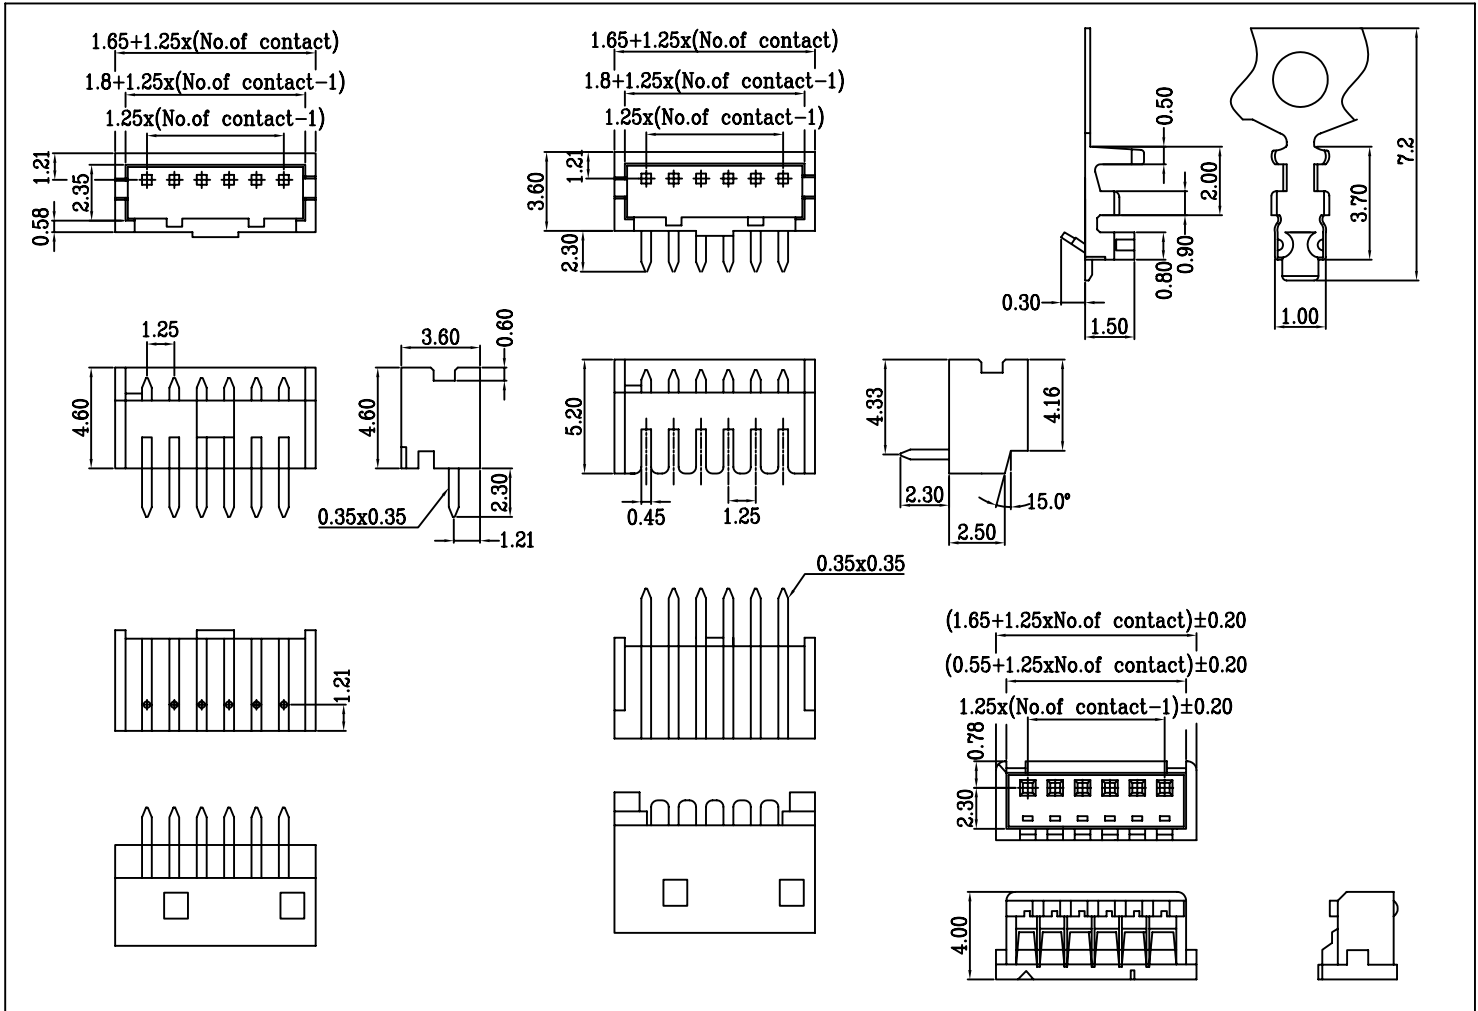

How to order **5** **1** **9** — —
 Serie-Nr. Nr. of contact Connector Type Contact Plating

Nr. of contact	Code
02~15	02-15

Connector Type	Code
Housing	1
Contact	2
Header straight	3
Header Right Angle	4

Plated	Code
Gold Plated	10
Tin Plated	50
Housing is unnecessary for plating option	