


## Right Angle Male Type C Connectors 96 Positions

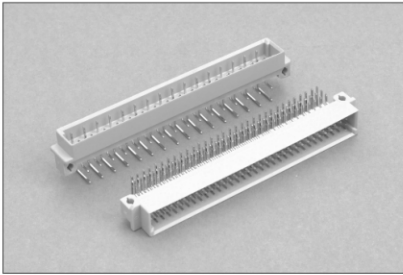


### Option:

- Connector with pre-installed snap-in mounting clips.
- Other Variations
- Please refer to page 46 for complete part number coding
- Other variations, please consult factory

### Dimensions

### Recommended P.C.B. layout

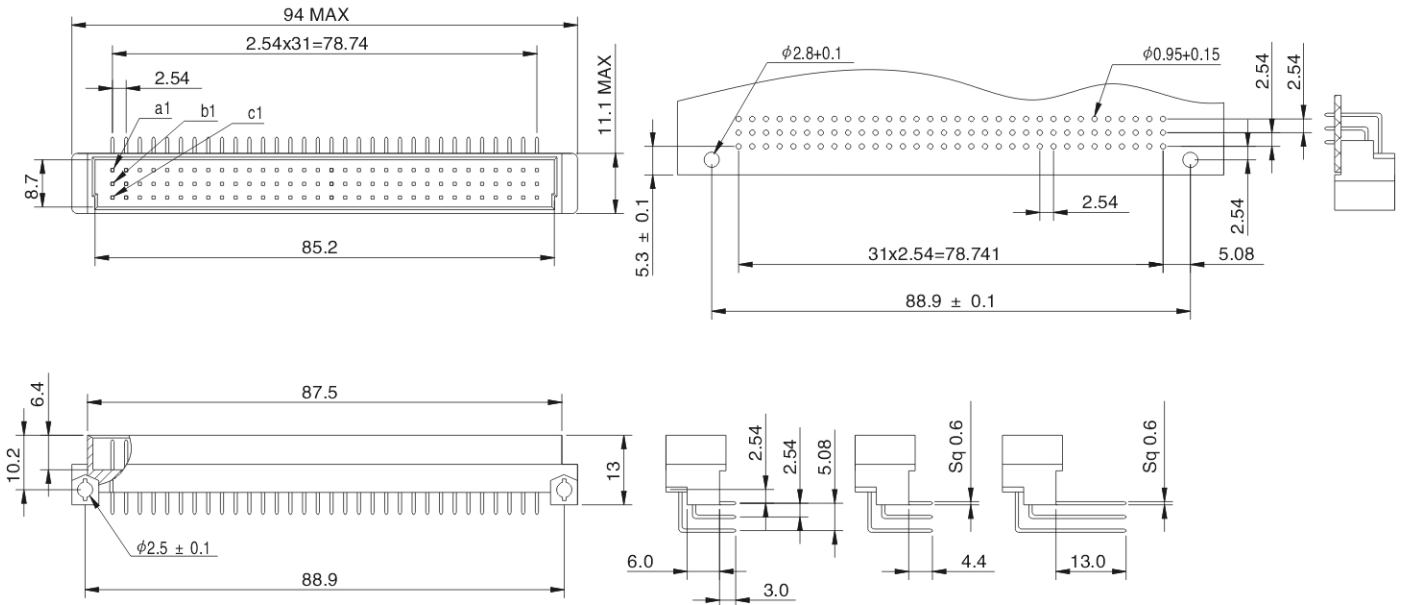

### Ordering Information

NO. OF CONTACTS		96	64	64	32	48	32
POSITION		a+b+c	a+c	a+b	a	a+b+c(2.4.6...)	a+c(2.4.6...)
TERMINATION	QUALITY	PART NUMBER					
3.0 mm	III	126-2-966-20-10	126-2-644-20-10	126-2-643-20-10	126-2-321-20-10	126-4-486-20-10	126-4-324-20-10
	II	126-2-966-20-20	126-2-644-20-20	126-2-643-20-20	126-2-321-20-20	126-4-486-20-20	126-4-324-20-20
4.4 mm	III	126-2-966-21-10	126-2-644-21-10	126-2-643-21-10	126-2-321-21-10	126-4-486-21-10	126-4-324-21-10
	II	126-2-966-21-20	126-2-644-21-20	126-2-643-21-20	126-2-321-21-20	126-4-486-21-20	126-4-324-21-20
13.0 mm	III	126-2-966-22-10	126-2-644-22-10	126-2-643-22-10	126-2-321-22-10	126-4-486-22-10	126-4-324-22-10
	II	126-2-966-22-20	126-2-644-22-20	126-2-643-22-20	126-2-321-22-20	126-4-486-22-20	126-4-324-22-20

Dimensions shown are for reference purpose only, All dimensions are in millimeters unless otherwise specified.