


# 534

## .156"(3.96mm) Shrouded Header and Crimp Housing and Contact 02 to 10 Contacts

### Technical data :

Contact Material : Copper alloy  
 Applicable wires : AWG # 18 to 22  
 Wafer(Housing) Material : Nylon, UL 94V-0  
 Current Rating : 5A AC, DC  
 Voltage Rating : 250V AC Maximum  
 Temperature Range : -25°C~+90°C  
 Contact Resistance : 20 mOhm Max  
 Insulation Resistance : 1000 MOhm min  
 Withstand Voltage : 1500V AC/minute  
 P.C.Board Thickness : 1.6mm(.063")

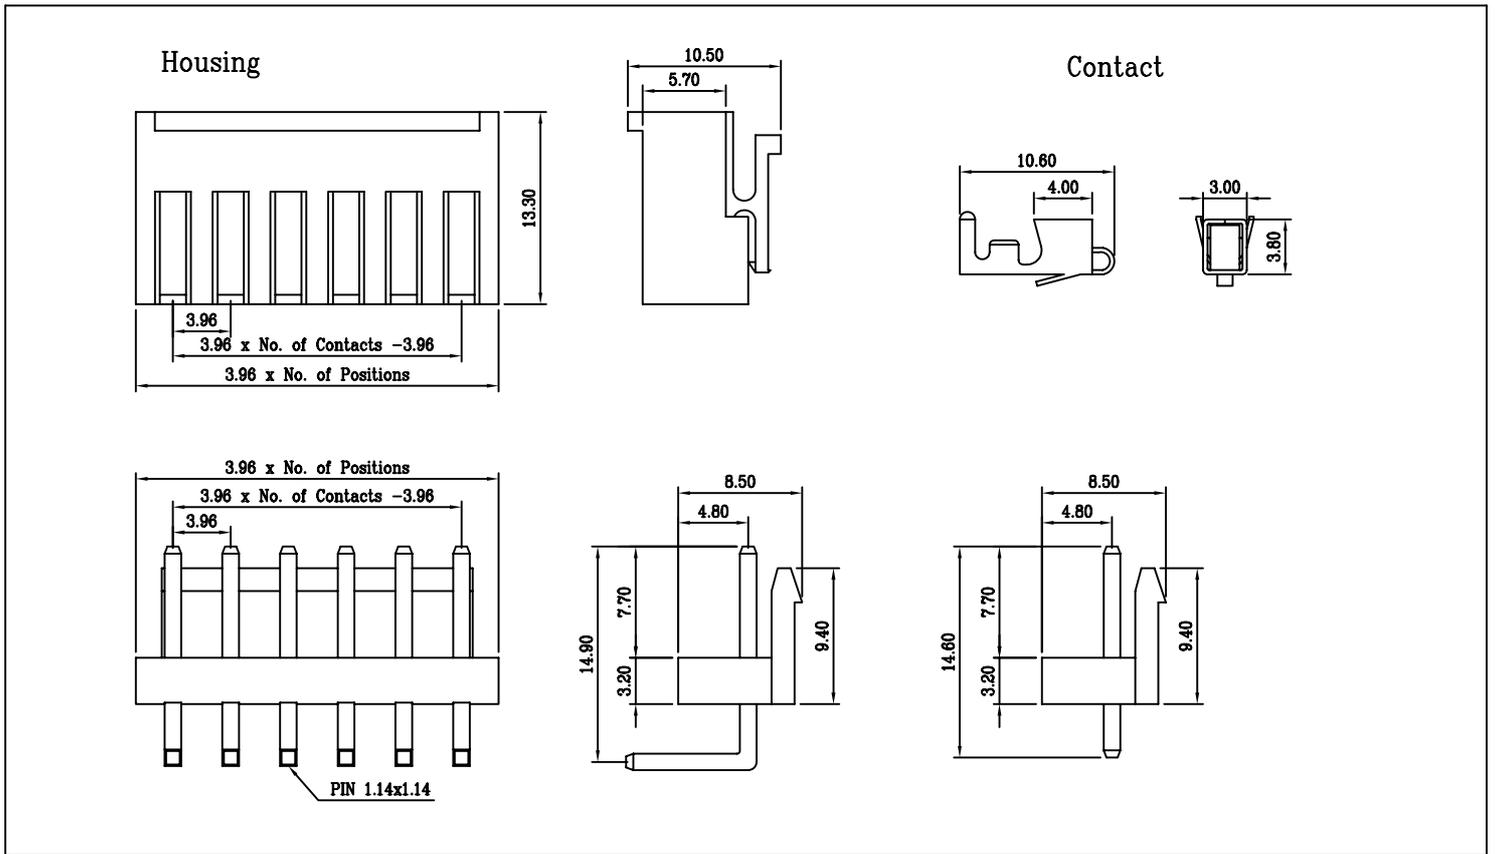

How to order    -    -

Serie-Nr.                      Nr. of contact                      Connector Type                      Contact Plating

Nr. of contact	code
02~10	02~10

Connector type	Code
Housing	1
Contact	2
Header straight	3
Header Right Angle	4

Plating	Code
Gold Plated	10
Tin Plated	50
Housing is unnecessary for plating option	