

825

USB A TYPE MALE CONNECTOR

Technical data

MATERIAL:

HOUSING: NY6T 30%G.F UL94V-0 RATED

CONTACT: BRASS t=0.25mm

SHELL: STEEL t=0.3mm


PLATING:

SHELL: 50u" NICKEL OVER 100u" Cu



CONTACT: UNDER PLATED 50u" NICKEL, OVER ALL

120u" TIN IN SOLDERING AREA.



SELECTIVE GOLD PLATED CONTACT AREA.



SMT TYPE

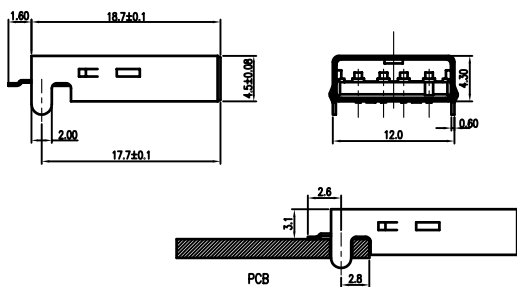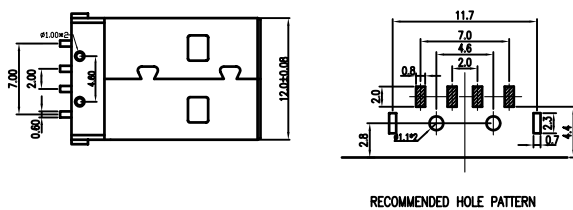

DIP TYPE

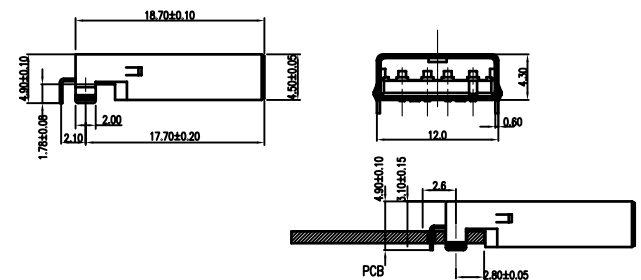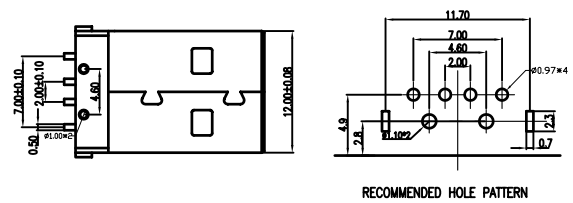

How to order — — —

Serie-Nr. Connector Type Plating option

Connector Type	Code
SMT Type	10
DIP Type	20

Plating Option	Code
Gold Flash	00
15u" SELECTIVE GOLD PLATED	15
30u" SELECTIVE GOLD PLATED	30