


914


1.27mm Pitch SMC Connectors, Male, Horizontal SMT Type

Technical Data :

Insulator Material: High Temperature Thermoplastic, LCP, UL 94V-0
Contact Material: stamped and formed, Phosphor Bronze
Clip Material: stamped and formed, Brass
Contact Plating: Au or Sn over Nickel
Clip Plating: Matt Sn over Nickel
Air- and creepage distance: 0.4mm
Insulator resistance : 10000 Megohms min.
Dielectric withstanding : AC 500V for 1 Minute.
Data Rate: 3Gbit/S Max
Operating Temperature: -55°C to +125°C.
Max. processing Temp: 230°C for 30-60 seconds.
 280°C for 10 seconds.
Mates with : 912.913

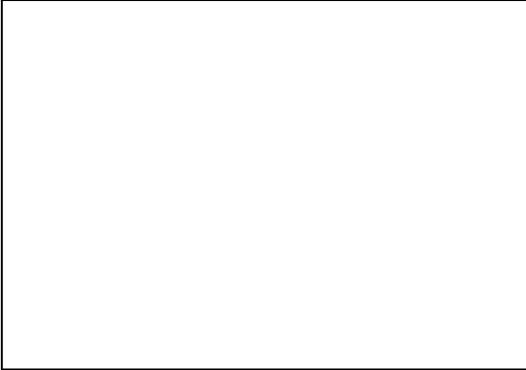

RoHS Compliant

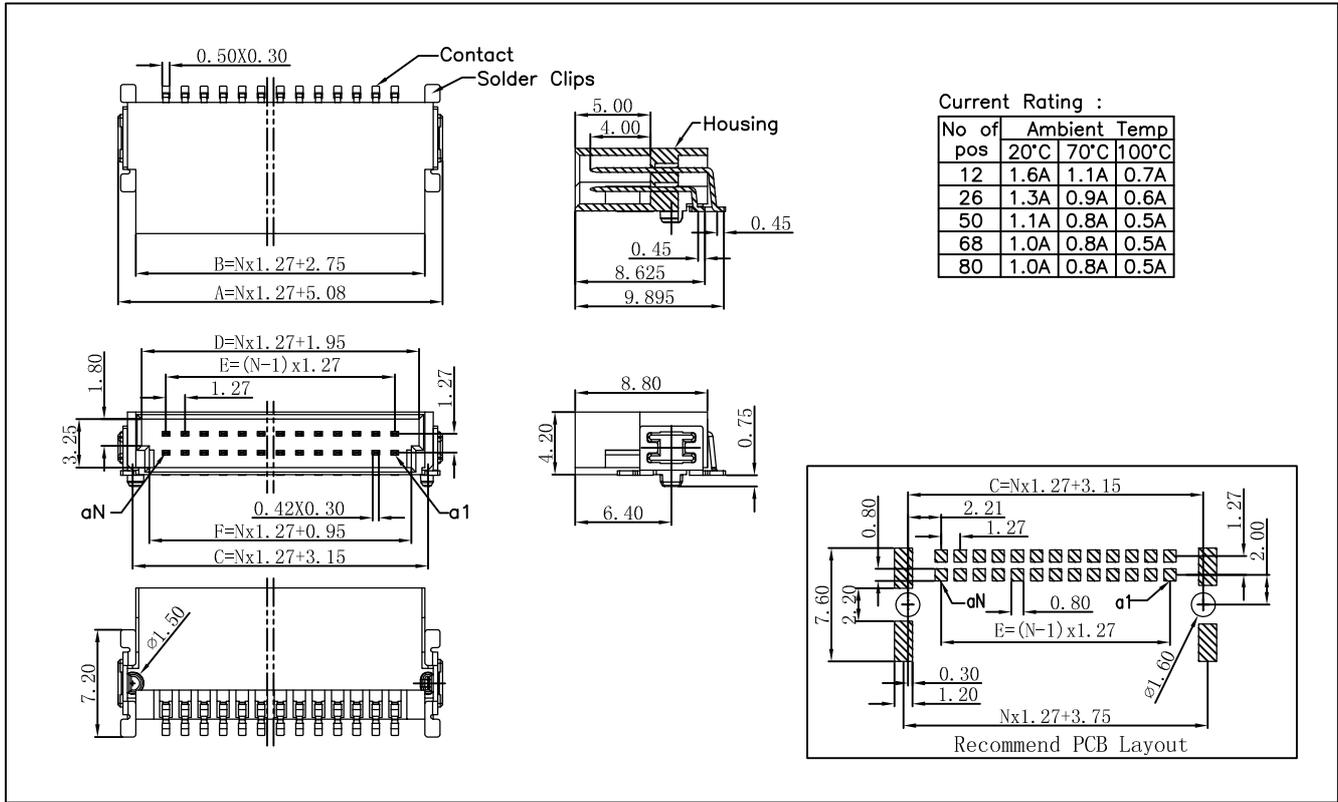

How to order **9** **1** **4** — — —

 Serie-Nr. Nr. of Contact Plating Packing Option

Nr. of contact	Dimensions(mm)						Code
	A	B	C	D	E	F	
12	12.70	10.37	10.77	9.57	6.35	8.57	12
26	21.59	19.26	19.66	18.46	15.24	17.46	26
50	36.83	34.50	34.90	33.70	30.48	32.70	50
68	48.26	45.93	46.33	45.13	41.91	44.13	68
80	55.88	53.55	53.95	52.75	49.53	51.75	80

06-10 Pins and 82-98 Pins, Please contact factory.

Plating option	Code
Full gold flash plated	10
Selective gold flash plated	60
10u" Selective gold plated	610
30u" Selective gold plated	630

Packing option	Code
Tube	1
Tape & Reel	2

W.E.