


.079"(2.0mm) Board-In Type Connectors

Specifications:

- Current rating: 2A AC, DC
- Voltage rating: 250V AC, DC
- Withstanding voltage: 800V AC/minute
- Insulation resistance: 1000M Ω min.
- Temperature rise: -25°C ~ 85°C max. (including temperature rise)
- Applicable P.C. board thickness: .063"(1.6mm)

20011TR Series Crimp Terminal


- Material: Brass
- Finished: Tin-plated
- Used in 20011HR-N series housing
- Wire range: AWG #24 ~ #30
- Thickness: 0.2mm

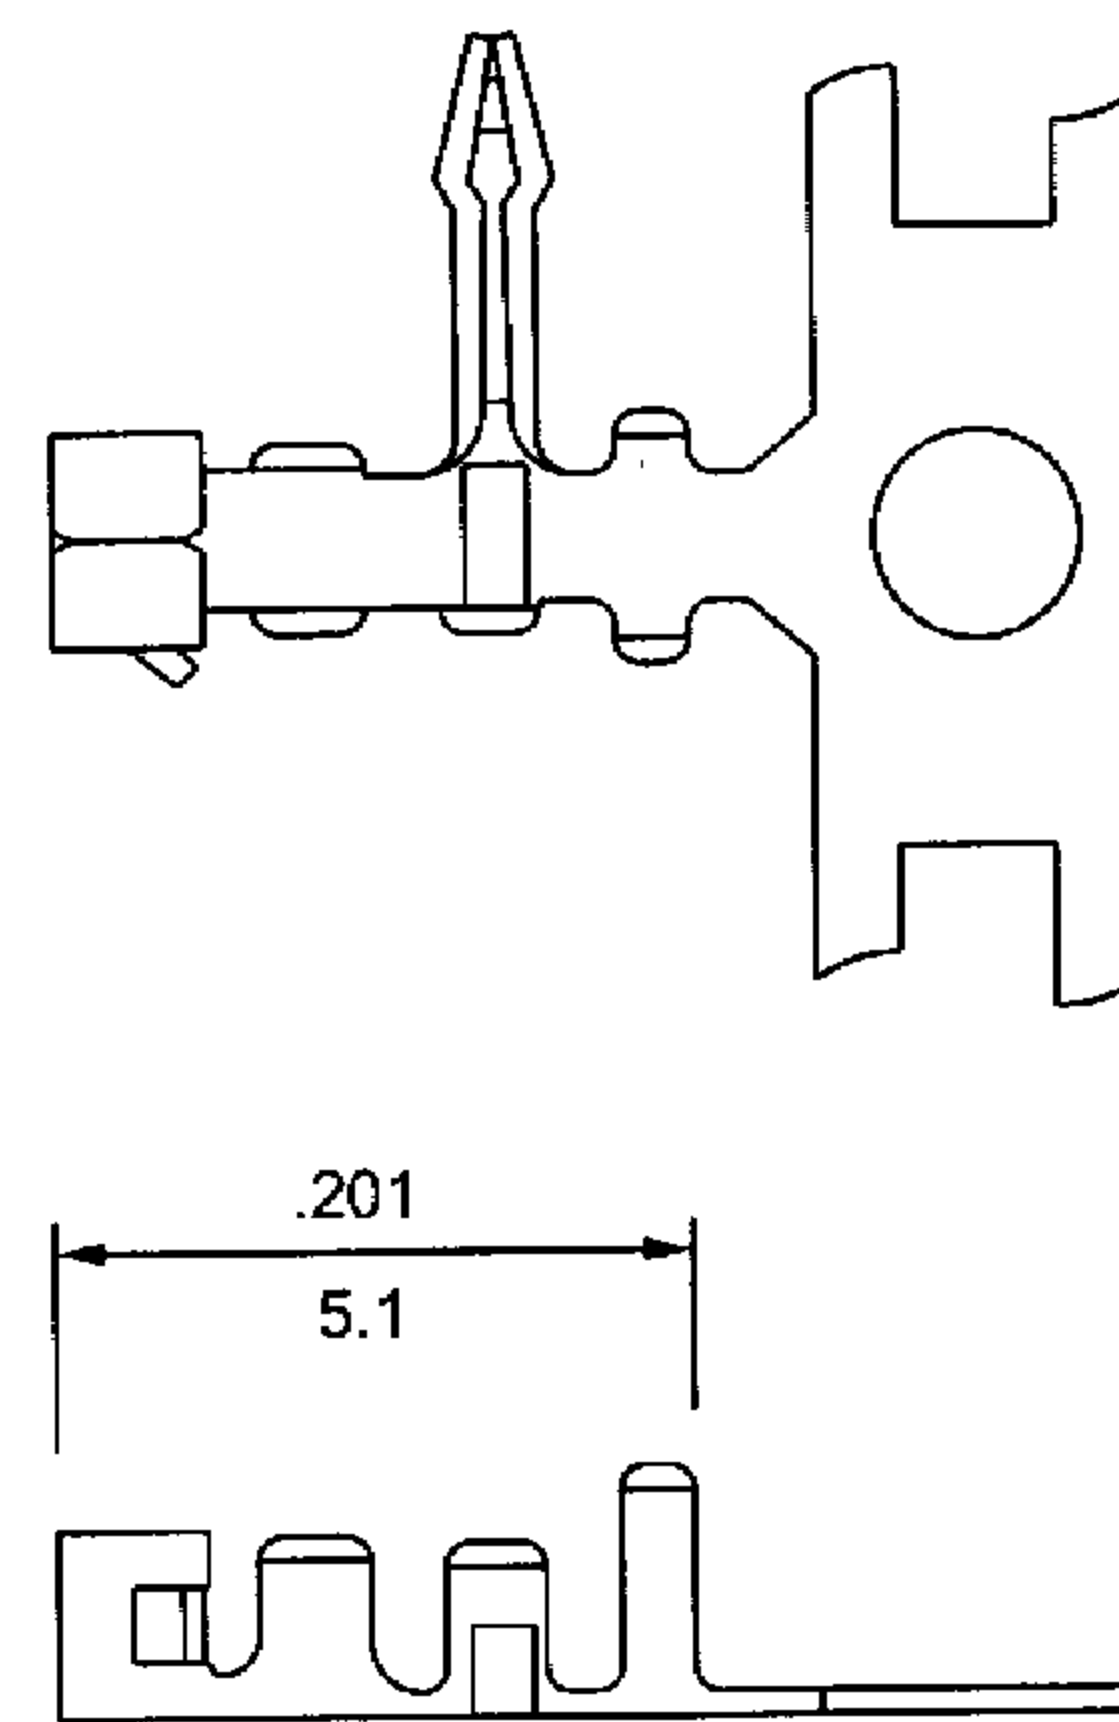


inches
mm

20011HR-N Series Crimp Terminal Housing

- 2 ~ 15 circuits available
- Material: UL 94V-0 nylon 66
- Accepts 20011TR terminal

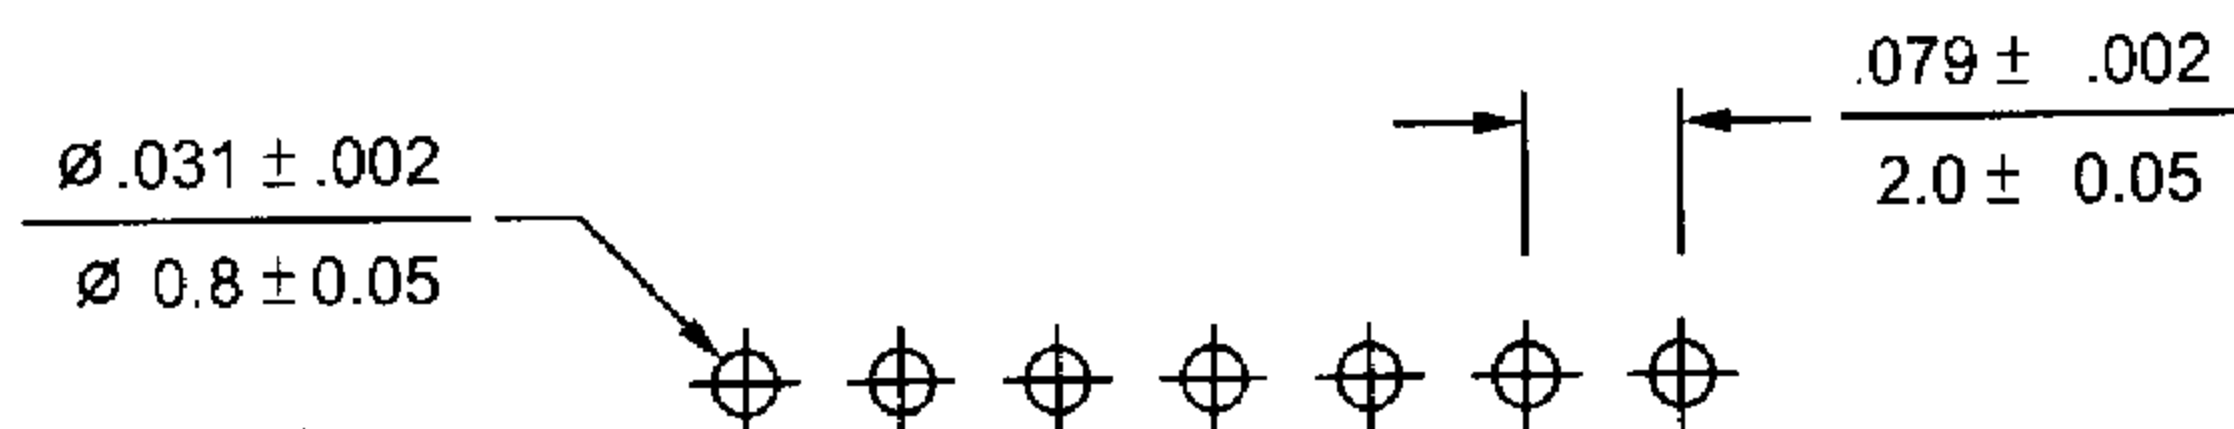

P.C.B. hole dimensions

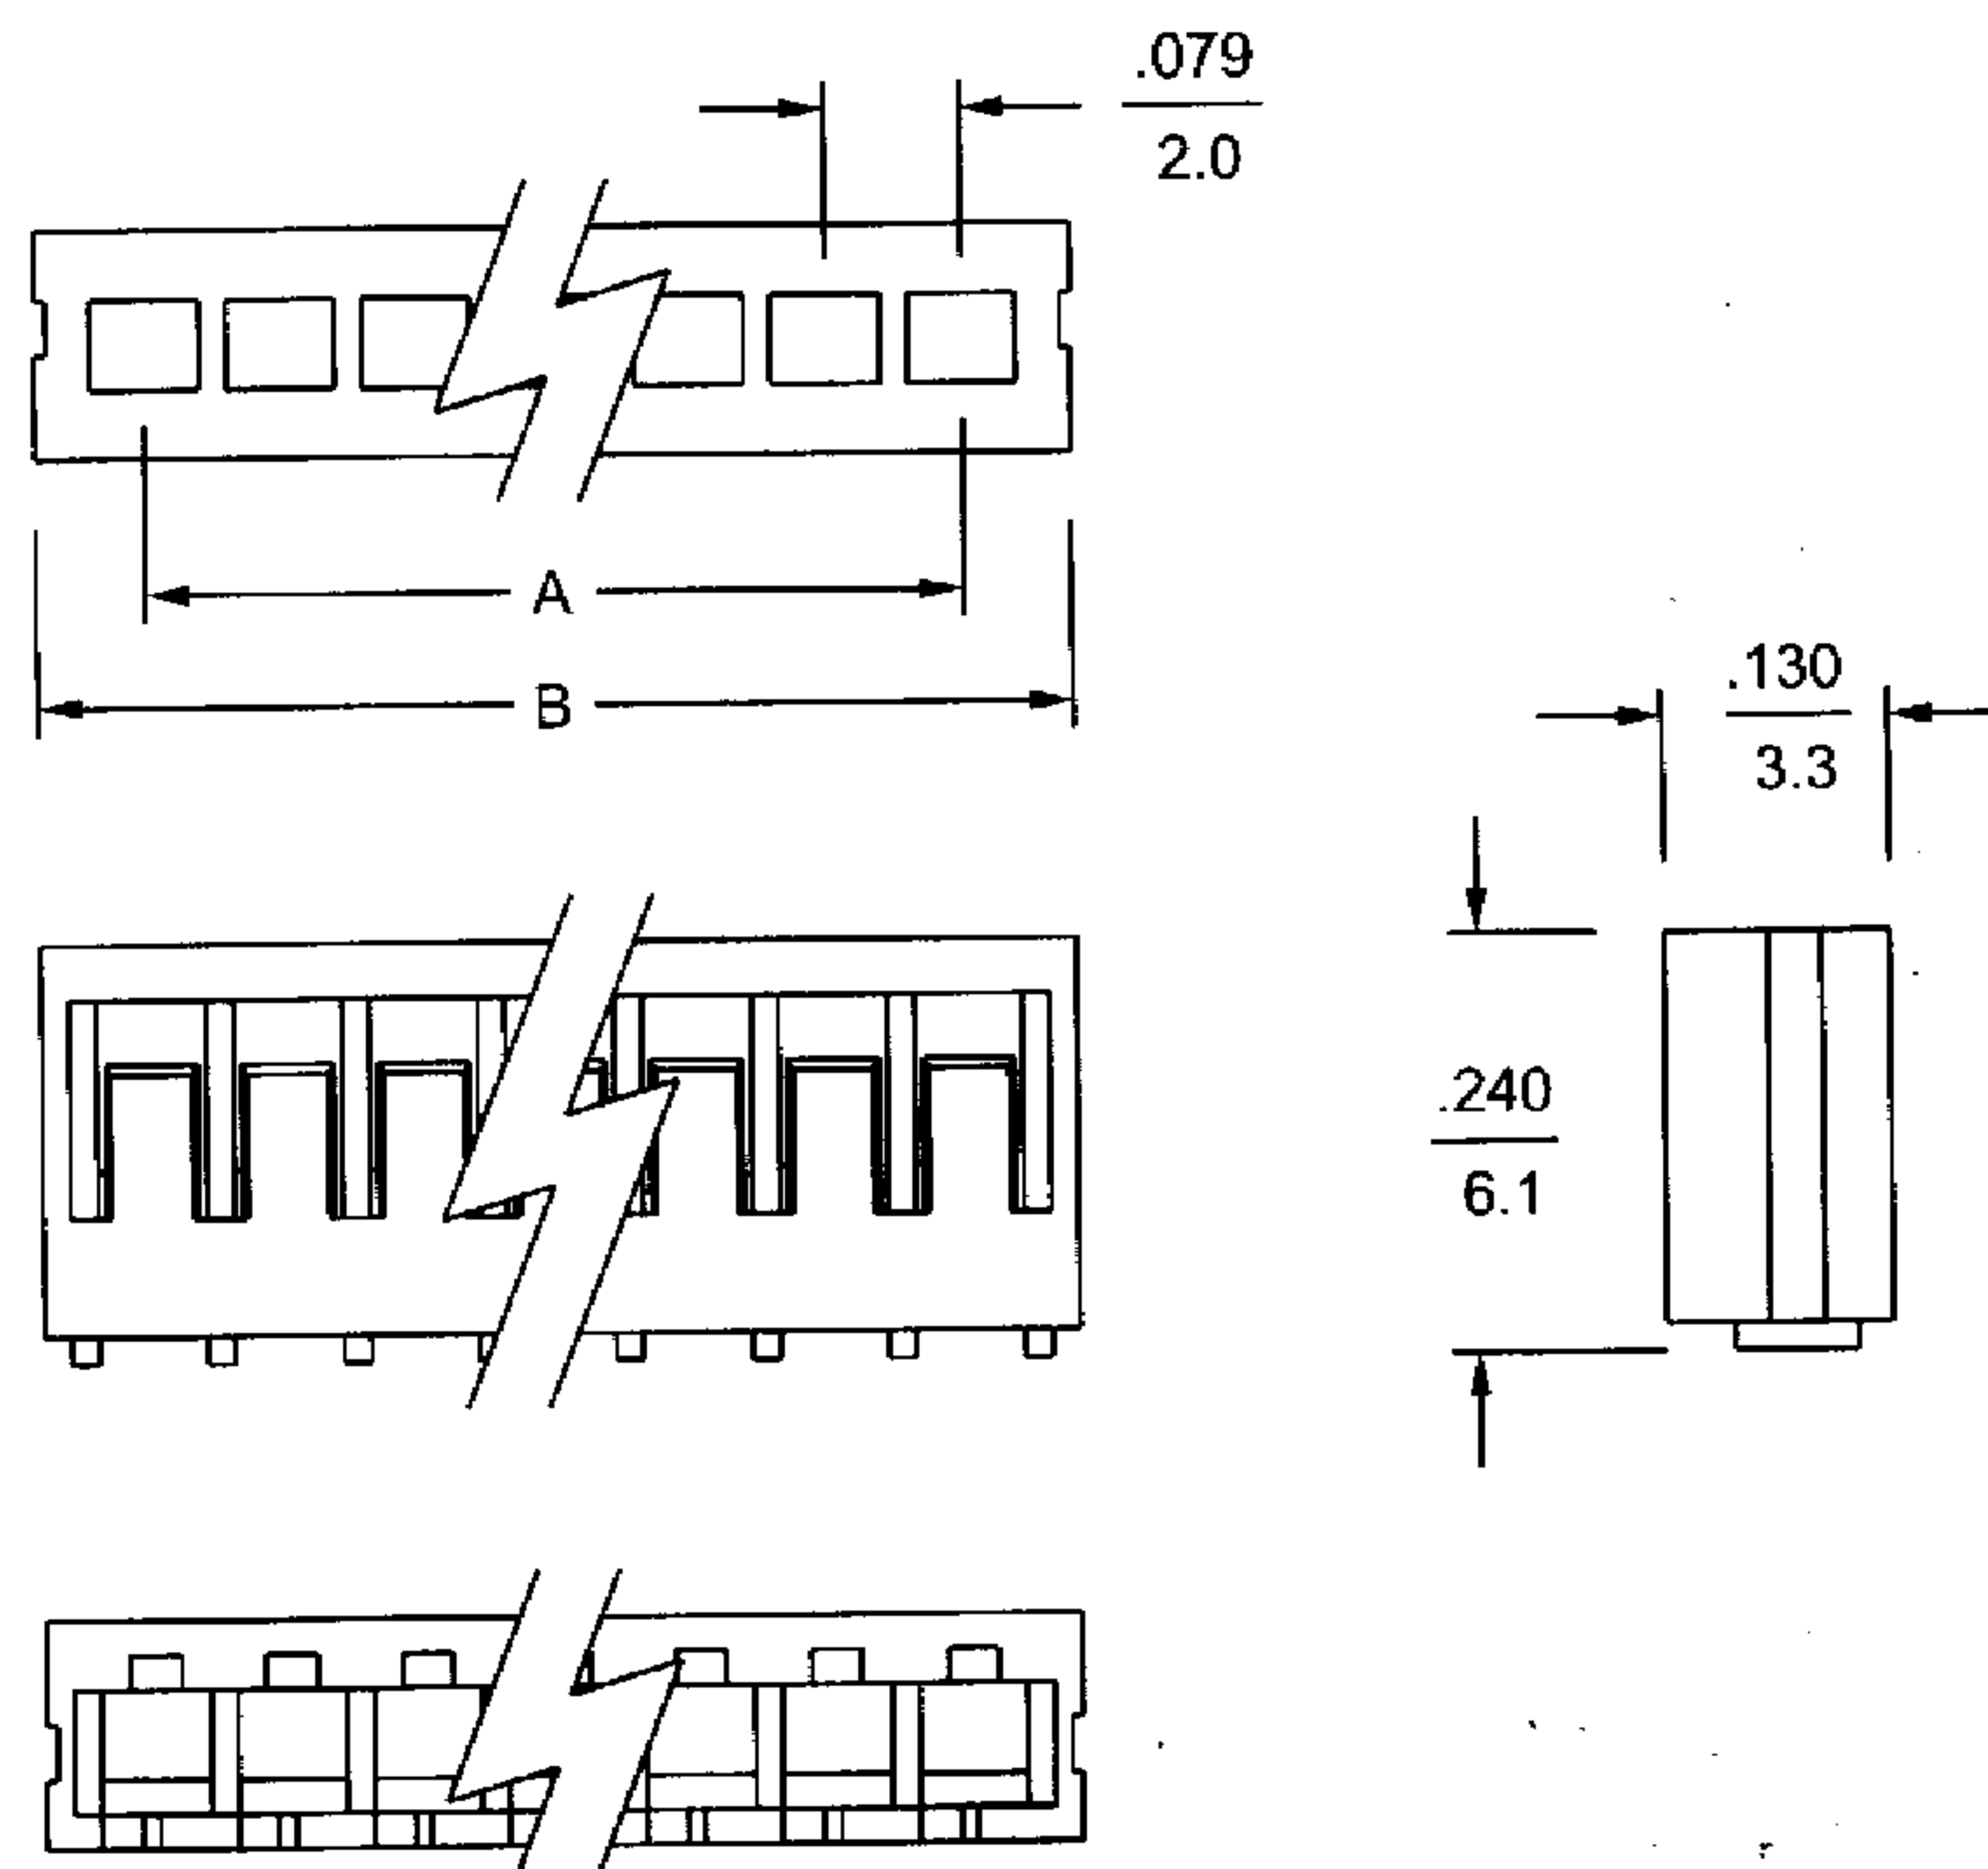

inches
mm

Dimensional Information - in (mm)

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	0.079 (2.0)	0.205 (5.2)	7	0.472 (12.0)	0.598 (15.2)	12	0.866 (22.0)	0.992 (25.2)
3	0.157 (4.0)	0.283 (7.2)	8	0.551 (14.0)	0.677 (17.2)	13	0.945 (24.0)	1.071 (27.2)
4	0.236 (6.0)	0.362 (9.2)	9	0.630 (16.0)	0.756 (19.2)	14	1.024 (26.0)	1.150 (29.2)
5	0.315 (8.0)	0.441 (11.2)	10	0.709 (18.0)	0.835 (21.2)	15	1.102 (28.0)	1.228 (31.2)
6	0.394 (10.0)	0.520 (13.2)	11	0.787 (20.0)	0.913 (23.2)			